Low Power, High Voltage SPST Analog Switches

DESCRIPTION

The DG447, DG448 are dual supply single-pole/single-throw (SPST) switches. On resistance is 25 Ω maximum and flatness is 2.2 Ω max over the specified analog signal range. These analog switches were designed to provide high speed, low error switching of precision analog signals. The primary application areas are in the routing and switching in telecommunications and test equipment. Combining low power, low leakages, low on-resistance and small physical size, the DG477, DG448 are also ideally suited for portable and battery powered industrial and military equipment.

The DG477 has one normally closed switch, while the DG448 switch is normally open. They operate either from a single 7 V to 36 V supply or from dual ± 4.5 V to ± 20 V supplies. They are offered in the very popular, small TSOP6 package.

BENEFITS

- Wide dynamic range
- Low signal errors and distortion
- Break-before-make switching action
- Simple interfacing
- Reduced board space
- Improved reliability

FEATURES

- ± 15 V analog signal range
- On-resistance - $R_{DS(on)}$: 25 Ω max.
- Fast switching action - t_{on}: 100 ns
- V_L logic supply not required
- TTL CMOS input compatible
- Rail to rail signal handling
- Dual or single supply operation
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free


RoHS COMPLIANT

APPLICATIONS

- Precision test equipment
- Precision instrumentation
- Communications systems
- PBX, PABX systems
- Audio equipment
- Redundant systems
- PC multimedia boards
- Hard disc drives


FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

DG447



TSOP6

DG448



TSOP6

TRUTH TABLE		
LOGIC	DG447	DG448
0	On	Off
1	Off	On

Note

- Logic “0” ≤ 0.8 V
  Logic “1” ≥ 2.4 V

Device Marking:
DG447DV = G5xxx
DG448DV = G6xxx

ORDERING INFORMATION		
TEMP. RANGE	PACKAGE	PART NUMBER
DG447, DG448		
-40 °C to +85 °C	6-pin TSOP	DG447DV-T1-E3
		DG448DV-T1-E3

For technical questions, contact: analogswitchtechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C, unless otherwise noted)			
PARAMETER		**LIMIT**	**UNIT**
V+		44	V
GND		25	
Digital inputs [a], $V_{NO/NC}$, V_{COM}		(V-) - 2 to (V+) + 2 or 30 mA, whichever occurs first	
Continuous current (any terminal)		30	mA
Current (NO or NC or COM) pulsed at 1 ms, 10 % duty cycle		100	
Storage temperature		-65 to +150	°C
Power dissipation (package) [b]	6-pin TSOP [c]	570	mW

Notes

a. Signals on NO, NC, COM, or IN exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings

b. All leads welded or soldered to PC board

c. Derate 7 mW/°C above 70 °C

SPECIFICATIONS [a]							
PARAMETER	**SYMBOL**	**TEST CONDITIONS UNLESS SPECIFIED V+ = 15 V, V- = -15 V, V_{IN} = 2.4 V, 0.8 V** [f]	**TEMP.** [b]	**D SUFFIX -40 °C TO +85 °C**			**UNIT**
				MIN. [d]	**TYP.** [c]	**MAX.** [d]	
Analog Switch							
Analog signal range [e]	V_{ANALOG}		Full	-15	-	15	V
Drain-source on-resistance	R_{ON}	$I_{NO/NC}$ = 10 mA, V_{COM} = 10 V, V+ = 13.5 V, V- = -13.5 V	Room	-	17	25	Ω
			Full	-	-	30	
On-resistance flatness	R_{ON} flatness	$I_{NO/NC}$ = 10 mA, V_{COM} = ± 5 V, 0 V, V+ = 13.5 V, V- = -13.5 V	Room	-	0.8	2.2	
			Full	-	-	3	
Switch off leakage current	$I_{NO/NC(off)}$	V+ = 16.5, V- = -16.5 V, V_{COM} = ± 15.5 V, $V_{NO/NC}$ = -/+ 15.5 V	Room	-1	-0.1	1	nA
			Full	-10	-	10	
	$I_{COM(off)}$		Room	-1	-0.1	1	
			Full	-10	-	10	
Channel on leakage current	$I_{COM(on)}$	V+ = 16.5 V, V- = -16.5 V, V_{COM} = $V_{NO/NC}$ = ± 15.5 V	Room	-1	-0.1	1	
			Full	-10	-	10	
Digital Control							
Input, high voltage	I_{INH}		Full	2.4	-	-	V
Input, low voltage	I_{INL}		Full	-	-	0.8	
Input capacitance [e]	C_{IN}		Room	-	5	-	pF
Input current	I_{IN}	V_{IN} = 0 V or 5 V		-1	-	1	µA
Dynamic Characteristics							
Turn-on time	t_{on}	R_L = 300 Ω, C_L = 35 pF, $V_{NO/NC}$ = ± 10 V	Room	-	100	130	ns
			Full	-	-	140	
Turn-off time	t_{off}		Room	-	50	95	
			Full	-	-	110	
Charge injection [e]	Q	C_L = 10 nF, V_{gen} = 0 V, R_{gen} = 0 Ω	Room	-	10	-	pC
Off-isolation [e]	OIRR	C_L= 5 pF, R_L = 50 Ω, f = 1 MHz	Room	-	-72	-	dB
Source off capacitance [e]	$C_{S(off)}$	f = 1 MHz	Room	-	19	-	pF
Drain off capacitance [e]	$C_{D(off)}$		Room	-	8	-	
Channel on capacitance [e]	$C_{D(on)}$	f = 1 MHz	Room	-	30	-	
Power Supplies							
Positive supply current	I+	V+ = 16.5 V, V- = -16.5 V, V_{IN} = 0 V or 5 V	Room	-	16	30	µA
			Full	-	-	50	
Negative supply current	I-		Room	-1	-0.02	-	
			Full	-10	-	-	

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SPECIFICATIONS [a]							
PARAMETER	SYMBOL	TEST CONDITIONS UNLESS SPECIFIED V+ = 12 V, V- = 0 V, V_{IN} = 2.4 V, 0.8 V [f]	TEMP. [b]	D SUFFIX - 40 °C TO +85 °C			UNIT
				MIN. [d]	TYP. [c]	MAX. [d]	
Analog Switch							
Analog signal range [e]	V_{ANALOG}		Full	0	-	12	V
Drain-source on-resistance	R_{ON}	$I_{NO/NC}$ = -10 mA, V_{COM} = 8 V, V+ = 10.8 V	Room	-	32	45	Ω
			Full	-	-	60	
On-resistance flatness	R_{ON} flatness	$I_{NO/NC}$ = 10 mA, V_{COM} = 2 V, 6 V, 8 V V+ = 10.8 V	Room	-	2	6	
			Full	-	-	8	
Dynamic Characteristics							
Turn-on time	t_{on}	$V_{NO, NC}$ = ± 10 V, R_L = 300 Ω, C_L = 35 pF	Room	-	140	175	ns
			Full	-	-	225	
Turn-off time	t_{off}		Room	-	50	120	
			Full	-	-	150	
Charge injection [e]	Q	C_L = 10 nF, V_{gen} = 0 V, R_{gen} = 0 Ω	Room	-	12	-	pC
Power Supplies							
Positive supply current	I+	V+ = 13.2 V, V_{IN} = 0 V, 5 V	Room	-	22	50	µA
			Full	-	-	75	


Notes

a. Refer to PROCESS OPTION FLOWCHART
b. Room = 25 °C, full = as determined by the operating temperature suffix
c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing
d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this datasheet
e. Guaranteed by design, not subject to production test
f. V_{IN} = input voltage to perform proper function


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

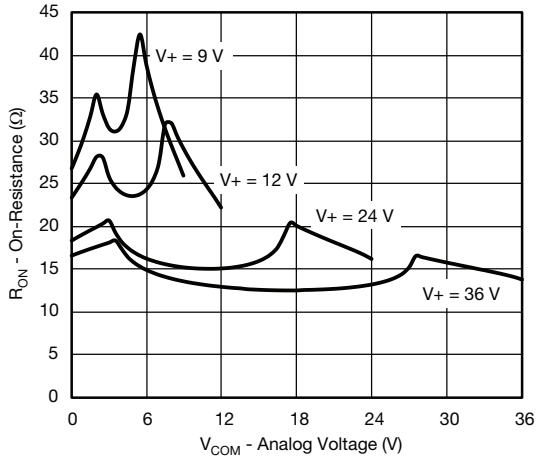


R_{ON} vs. V_{COM} and Single Supply Voltage

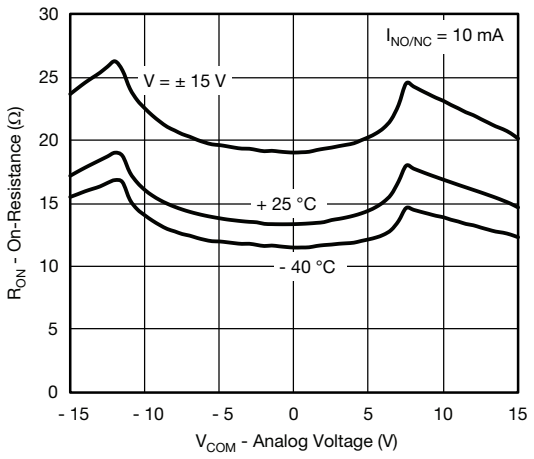


R_{ON} vs. Analog Voltage and Temperature

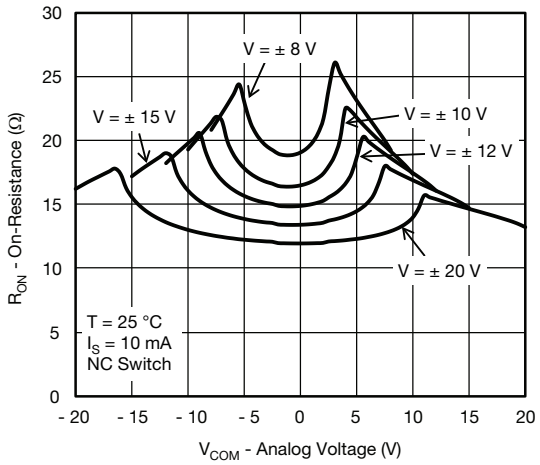


R_{ON} vs. V_{COM} and Dual Supply Voltage

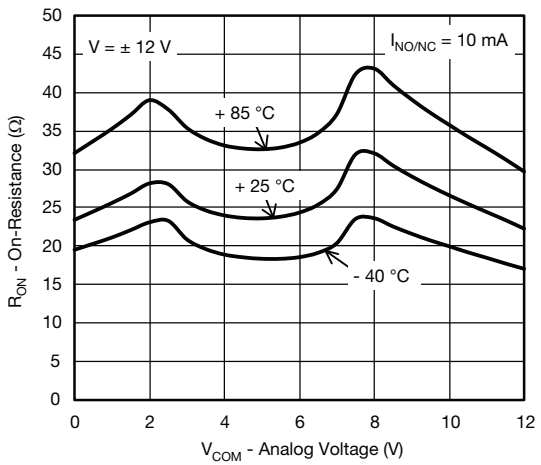

R_{ON} vs. Analog Voltage and Temperature

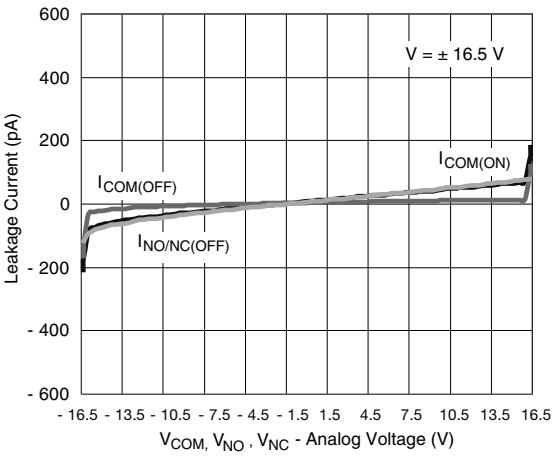


Leakage vs. Analog Voltage

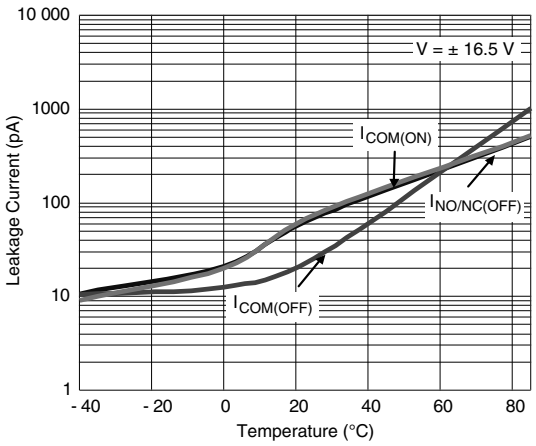


Leakage Current vs. Temperature

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

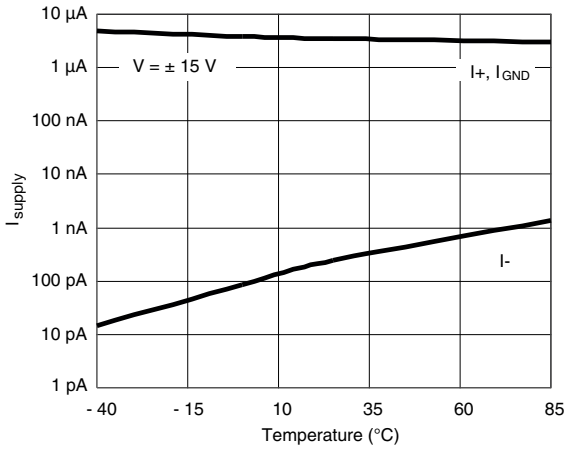


Supply Current vs. Temperature

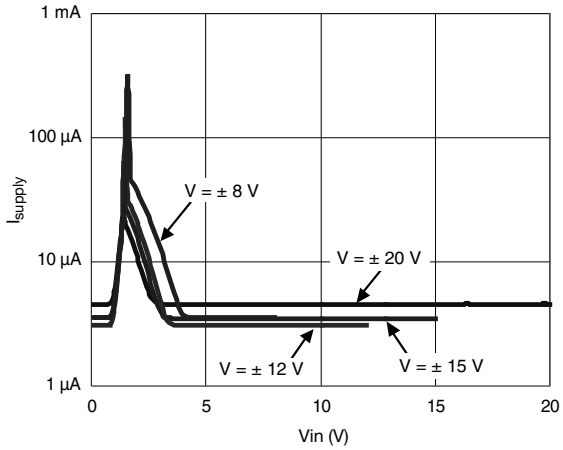


Supply Current vs. V_{IN}

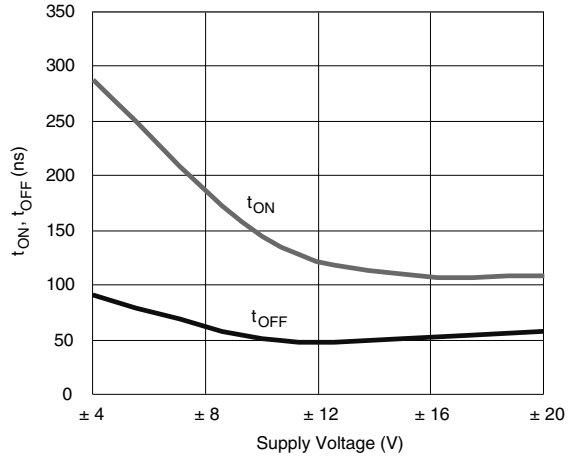


Switching Time vs. Supply Voltages

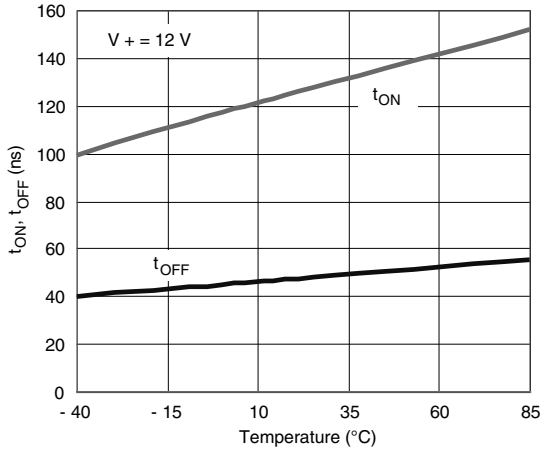

Switching Time vs. Temperature

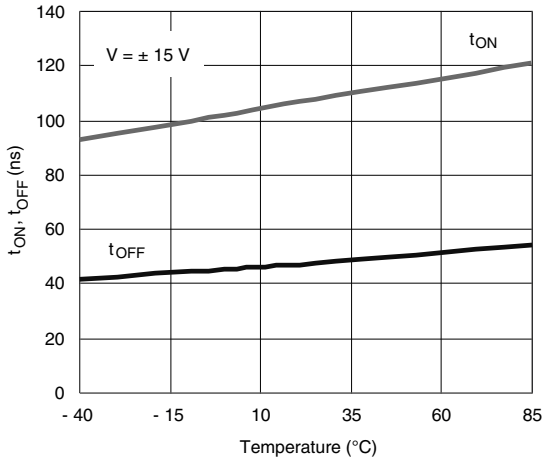


Switching Time vs. Temperature

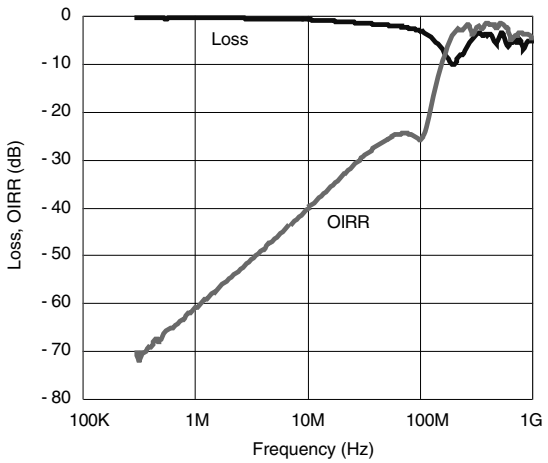


Off Isolation and Insertion Loss vs. Frequency

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

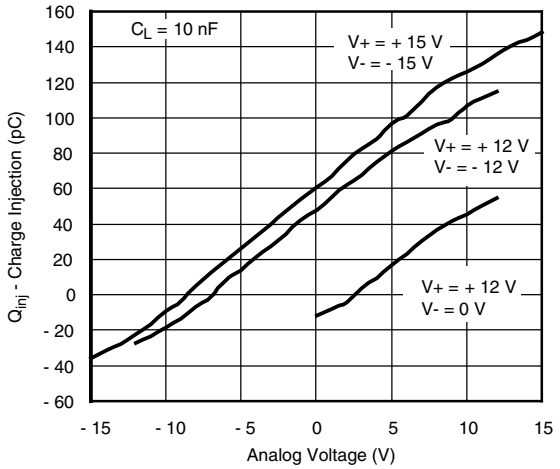

Charge Injection vs. Analog Voltage (Measured at COM pin)

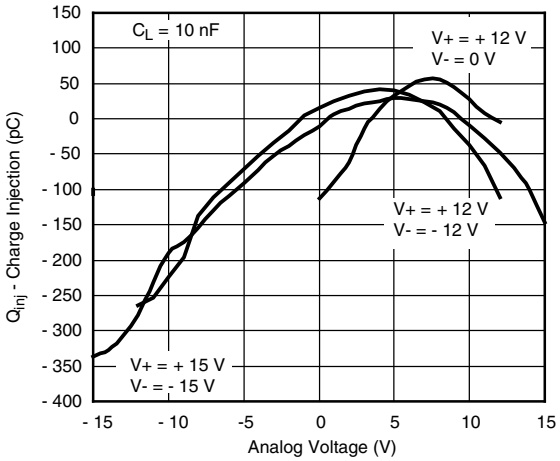


Charge Injection vs. Analog Voltage (Measured at NC or NO pin)

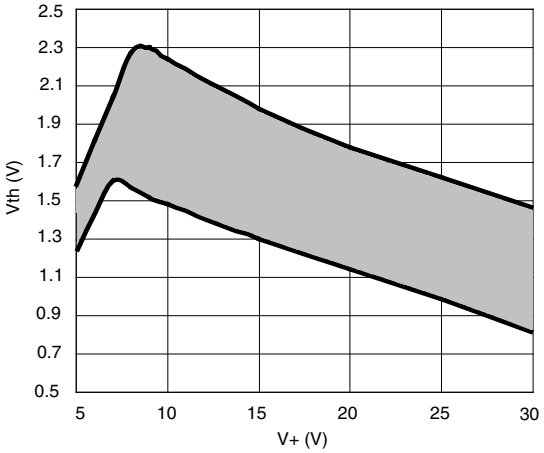

Input Switching Threshold vs. Supply Voltage


TEST CIRCUITS

V_O is the steady state output with the switch on.

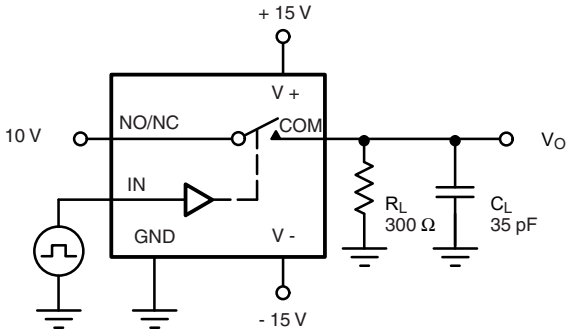

C_L (includes fixture and stray capacitance)

$$V_O = V_S \frac{R_L}{R_L + r_{ON}}$$

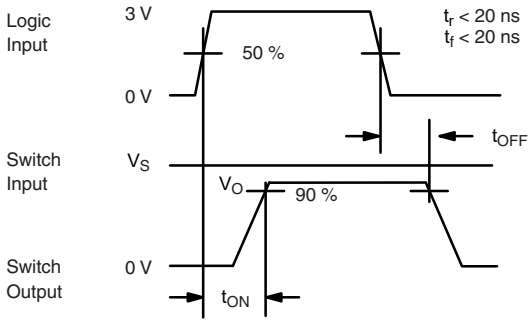

Note: Logic input waveform is inverted for switches that have the opposite logic sense.

Fig. 1 - Switching Time

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

TEST CIRCUITS

V_O is the steady state output with the switch on.

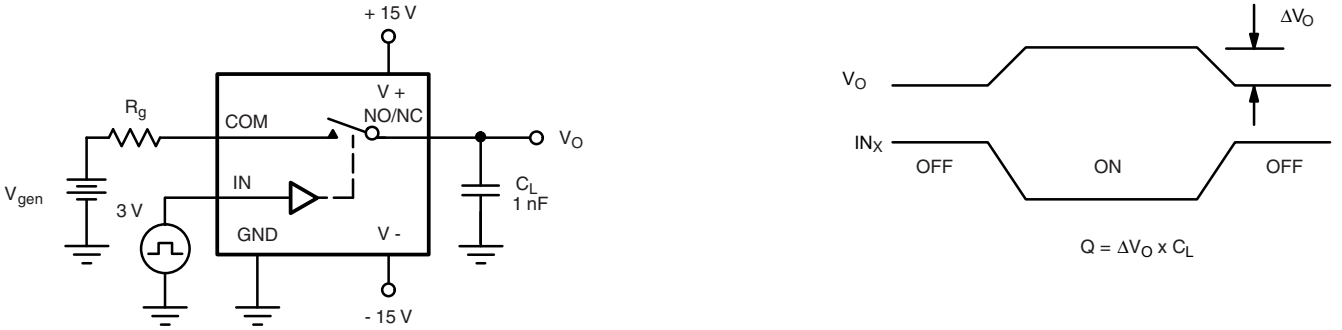


Fig. 2 - Charge Injection

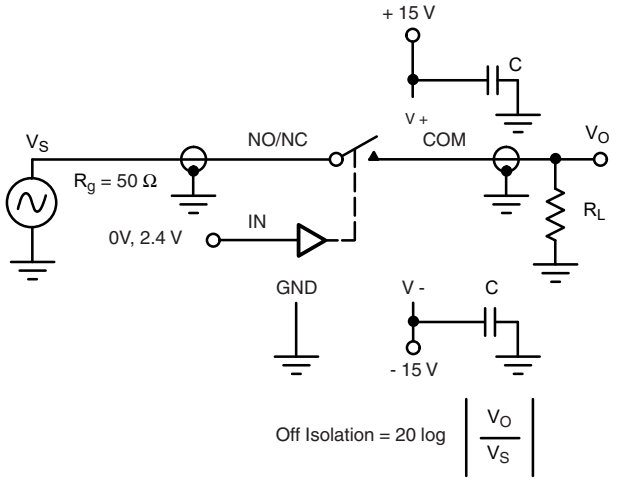


Fig. 3 - Off Isolation

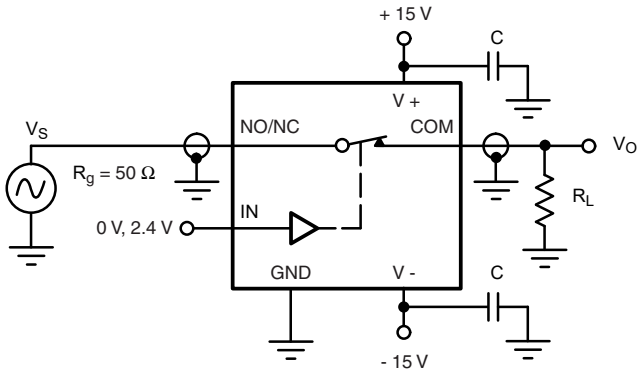


Fig. 4 - Insertion Loss

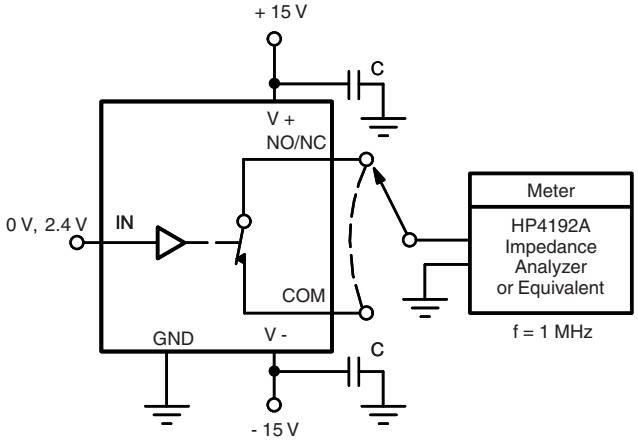


Fig. 5 - Source/Drain Capacitances

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000


PRODUCT SUMMARY		
Part number	DG447	DG448
Status code	2	2
Configuration	SPST x 1, NO	SPST x 1, NO
Single supply min. (V)	7	7
Single supply max. (V)	36	36
Dual supply min. (V)	4.5	4.5
Dual supply max. (V)	22	22
On-resistance (Ω)	32	32
Charge injection (pC)	12	12
Source on capacitance (pF)	30	30
Source off capacitance (pF)	8	8
Leakage switch on typ. (nA)	0.1	0.1
Leakage switch off max. (nA)	1	1
-3 dB bandwidth (MHz)	-	-
Package	TSOP-6	TSOP-6
Functional circuit / applications	Multi purpose, instrumentation, medical and healthcare	Multi purpose, instrumentation, medical and healthcare
Interface	Parallel	Parallel
Single supply operation	Yes	Yes
Dual supply operation	Yes	Yes
Turn on time max. (ns)	130	130
Crosstalk and off isolation	-72	-72

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?73854.


For technical questions, contact: analogswitchtechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000


TSOP: 5/6–LEAD
JEDEC Part Number: MO-193C

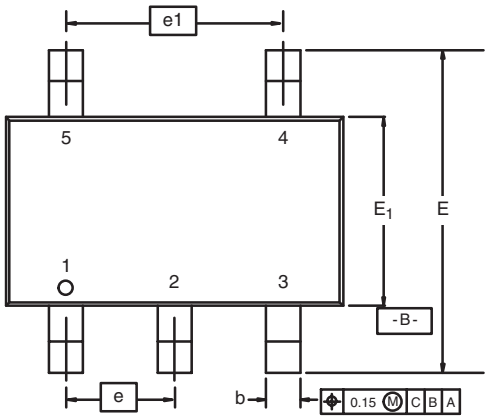


5-LEAD TSOP

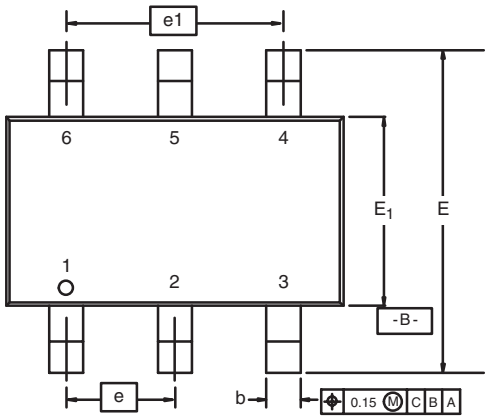

6-LEAD TSOP

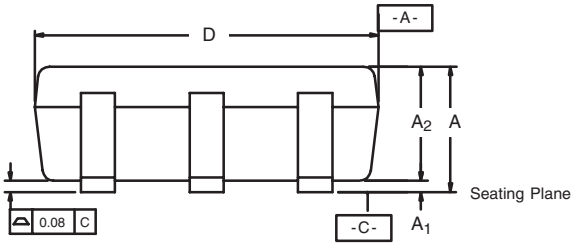

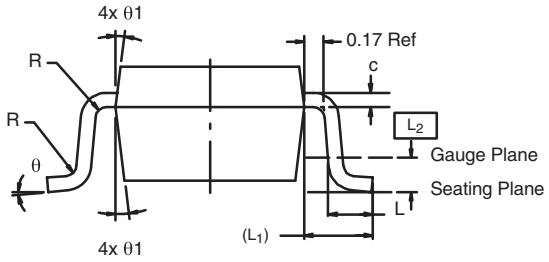

Dim	MILLIMETERS			INCHES		
	Min	Nom	Max	Min	Nom	Max
A	0.91	-	1.10	0.036	-	0.043
A_1	0.01	-	0.10	0.0004	-	0.004
A_2	0.90	-	1.00	0.035	0.038	0.039
b	0.30	0.32	0.45	0.012	0.013	0.018
c	0.10	0.15	0.20	0.004	0.006	0.008
D	2.95	3.05	3.10	0.116	0.120	0.122
E	2.70	2.85	2.98	0.106	0.112	0.117
E_1	1.55	1.65	1.70	0.061	0.065	0.067
e	0.95 BSC			0.0374 BSC		
e_1	1.80	1.90	2.00	0.071	0.075	0.079
L	0.32	-	0.50	0.012	-	0.020
L_1	0.60 Ref			0.024 Ref		
L_2	0.25 BSC			0.010 BSC		
R	0.10	-	-	0.004	-	-
θ	0°	4°	8°	0°	4°	8°
θ_1	7° Nom			7° Nom		
ECN: C-06593-Rev. I, 18-Dec-06 DWG: 5540						

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2025 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000