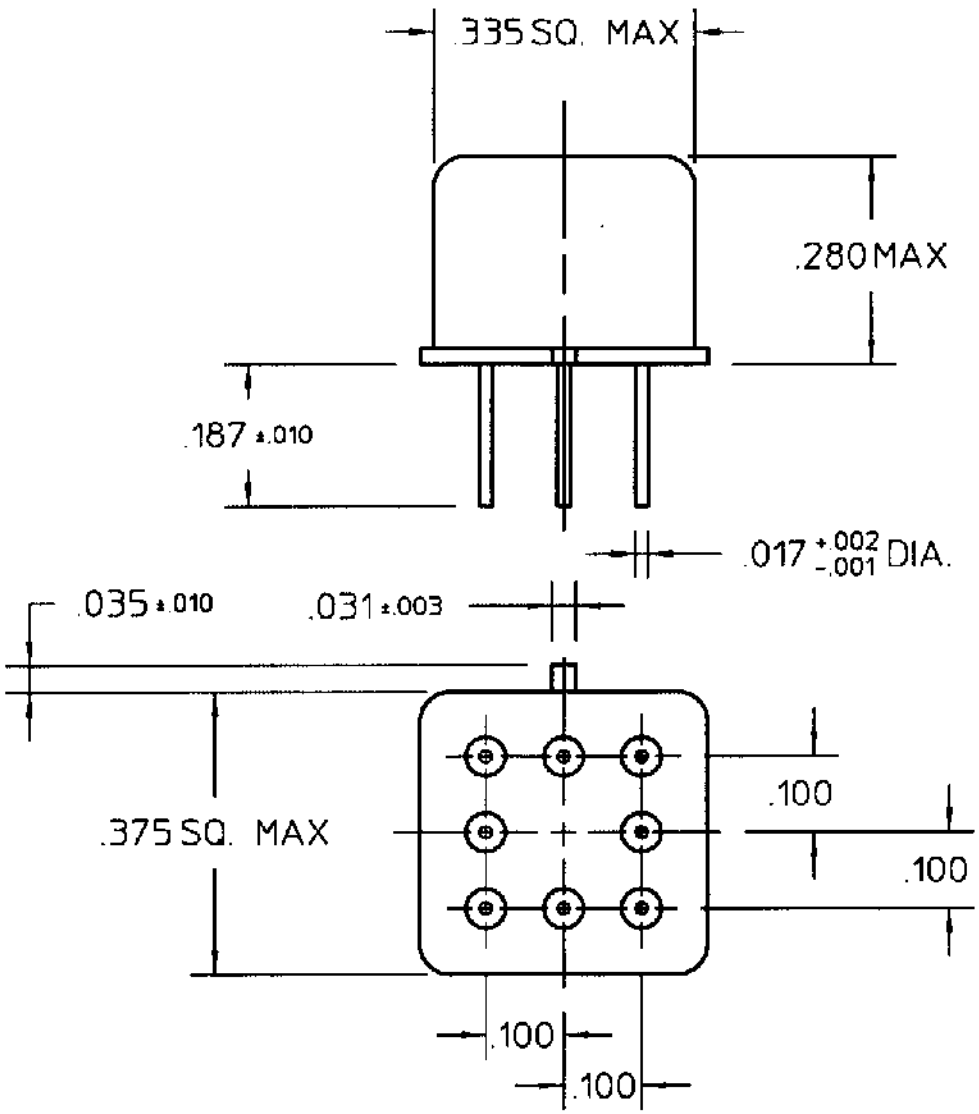


COIL: @ 25°C

RESISTANCE	880 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	10.5 VDC
MUST RELEASE	6.0 VDC MAX. 0.91 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/27/97 CK [signature] 10/27/97

COMMUNICATIONS INSTRUMENTS, INC.

CUST. DPL
CUST. NO. M39016/18-029P

TYPE JMGAD RELAY

JMGAPD-18P