EVL28167-A-Q-00A

3A, 22V, Synchronous Buck-Boost Converter with I²C Interface for Power Delivery Evaluation Board

DESCRIPTION

The EVL28167-A-Q-00A is an evaluation board for the MP28167-A, a high-efficiency, synchronous buck-boost converter with four integrated power switches and an I²C interface. The device can regulate output voltages across a wide input voltage supply range (2.8V to 22V).

The MP28167-A's integrated output voltage scaling and configurable output current limit functions are ideal for USB power delivery (PD) applications.

In buck mode, the MP28167-A uses constant-on-time (COT) control. In boost mode, it uses constant-off-time control. This provides fast load transient response and a smooth buck-boost mode transient. The MP28167-A features automatic pulse-frequency modulation (PFM) and pulse-width modulation (PWM) modes, forced PWM mode, as well as configurable constant current (CC) limiting and soft start (SS). These features provide flexible design options for different applications.

The MP28167-A's fault protections include over-current protection (OCP), over-voltage protection (OVP), under-voltage protection (UVP), short-circuit protection (SCP), and thermal shutdown (TSD).

The MP28167-A requires a minimal number of readily available, standard external components, and is available in a QFN-16 (3mmx3mm) package.

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Operating input voltage	V_{IN}	12	V
Switching frequency	f_{SW}	500	kHz
Output voltage	V_{OUT}	5	V
Output current	I_{OUT}	3	A

FEATURES

- Configurable Output Voltage via the FB Pin
- Wide 2.8V to 22V Operating Input Range
- 0.08V to 1.637V Reference Voltage (V_{REF}) Range with 0.8mV Resolution via the I²C (Default V_{REF} is 1V)
- 3A Output Current or 4A Input Current
- Four Internal, Low $R_{DS(ON)}$ Power MOSFETs
- Accurate Constant Current (CC) Output Current Limit with Internal Sensing
- 500kHz/750kHz Configurable Switching Frequency
- Line Drop Compensation
- Over-Voltage Protection (OVP) with Hiccup Mode
- Short-Circuit Protection (SCP) with Hiccup Mode
- Over-Temperature Protection
- I²C Interface and One-Time Programmable (OTP) Non-Volatile Memory:
  - Pulse-Frequency Modulation (PFM) Pulse-Width Modulation (PWM) Modes, Line Drop Compensation, Soft Start, OCP, OVP, etc.
- Configurable EN Shutdown Discharge
- Available in a QFN-16 (3mmx3mm) Package

MPL Optimized Performance with MPS Inductor MPL-AL6050 Series


APPLICATIONS

- USB Power Delivery (PD) for Sourcing Ports
- Buck-Boost Bus Voltage (V_{BUS}) Supplies

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVL28167-A-Q-00A EVALUATION BOARD

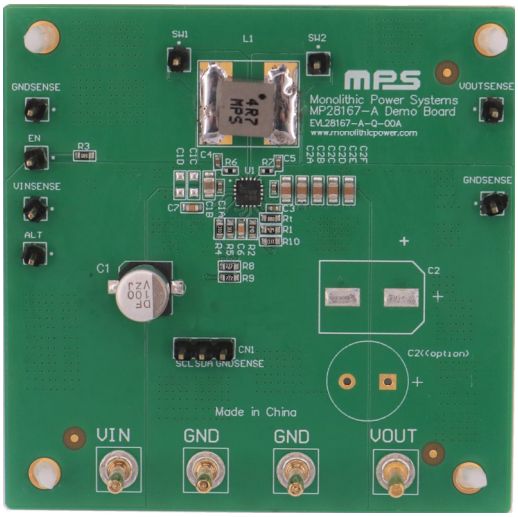


LxW (6.35cmx6.35cm)

Board Number	MPS IC Number	MPS Inductor
EVL28167-A-Q-00A	MP28167GQ-A	MPL-AL6050-4R7

Efficiency vs. Output Current

V_{IN} = 12V, V_{OUT} = 5V, f_{SW} = 500kHz,
L = 4.7µH, RDC = 16.5mΩ

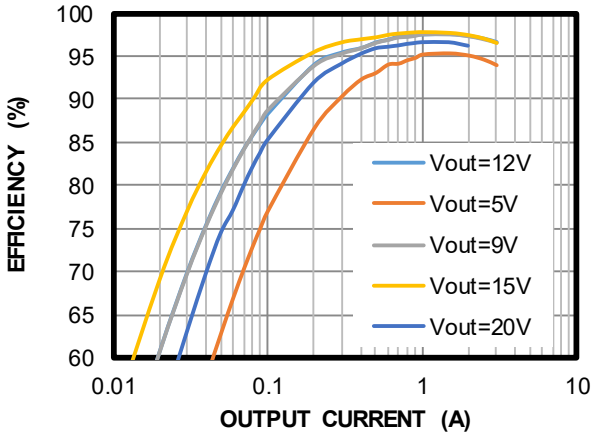

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

QUICK START GUIDE

1. Connect the load terminals to:
   a. Positive (+): VOUT
   b. Negative (-): GND
2. Preset the power supply output to 12V.
3. Turn off the power supply.
4. Connect the power supply terminals to:
   a. Positive (+): VIN
   b. Negative (-): GND
5. After making the connections, turn on the power supply. The board automatically should start up with its default settings. The related parameters can be changed by the I^2C. (1)

Note:

1) Refer to the MP28167-A datasheet for how to change the parameters via the I^2C.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVALUATION BOARD SCHEMATIC

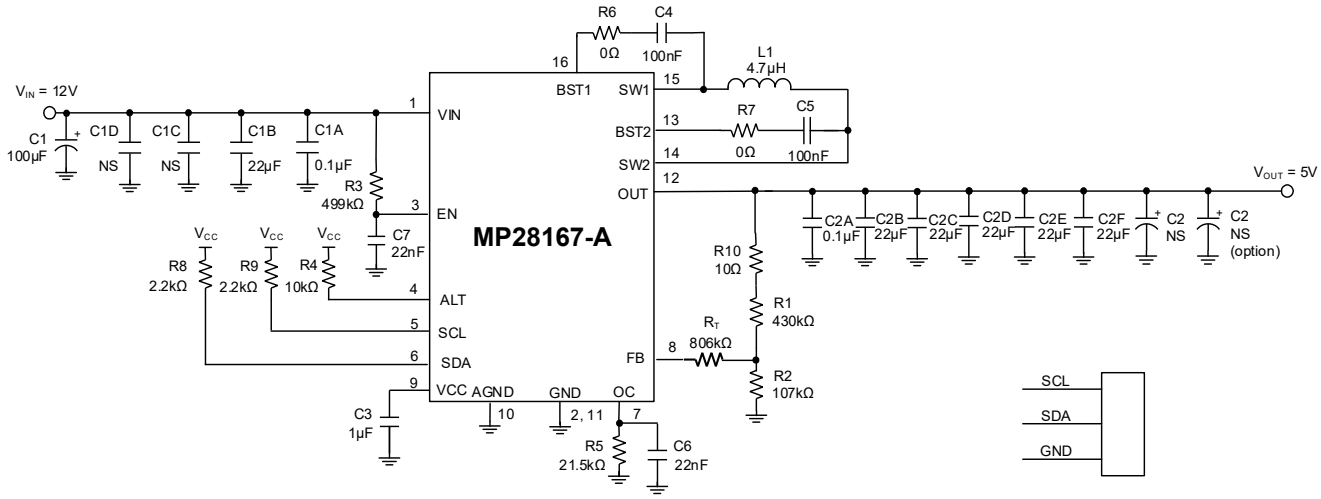


Figure 1: Evaluation Board Schematic

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVL28167-A-Q-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	U1	MP28167-A	Synchronous buck-boost converter	QFN-16 (3mmx3mm)	MPS	MP28167GQ-A
1	L1	4.7µH	Inductor, RDC = 16.5mΩ, I_{SAT} = 11A	SMD	MPS	MPL-AL6050-4R7
1	C1	100µF	Electrolytic capacitor, 35V	SMD	Chemicon	EMZJ350ADA101MF80G
6	C1B, C2B, C2C, C2D, C2E, C2F	22µF	Ceramic capacitor 25V, X5R	0805	TDK	C2012X5R1E226M
1	C3	1µF	Ceramic capacitor, 16V, X6S	0402	Murata	GRM155C81C105KE11D
4	C1A, C2A, C4, C5	100nF	Ceramic capacitor, 50V, X7R	0402	Samsung	CL05B104KB5NNNC
2	C6, C7	22nF	Ceramic capacitor, 50V, X5R	0603	Murata	GRM188R71H223KA01D
0	C1C, C1D, C2, C2 (option)	NS	NA	NA	NA	NA
1	R1	430kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07430KL
1	R2	107kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07107KL
1	R3	499kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07499KL
1	R4	10kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0710KL
1	R5	21.5kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0721K5RL
2	R6, R7	0Ω	Film resistor, 1%	0402	Yageo	RC0402FR-070RL
2	R8, R9	2.2kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-072K2L
1	R10	10Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0710RL
1	R_T	806kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07806KL
1	CN1	2.54mm	Test pin	DIP	Wurth	61300311121


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS

Performance waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, L = 4.7µH, f_{SW} = 500kHz, T_A = 25°C, unless otherwise noted.


Start-Up through EN via I²C Command

Load = 0A

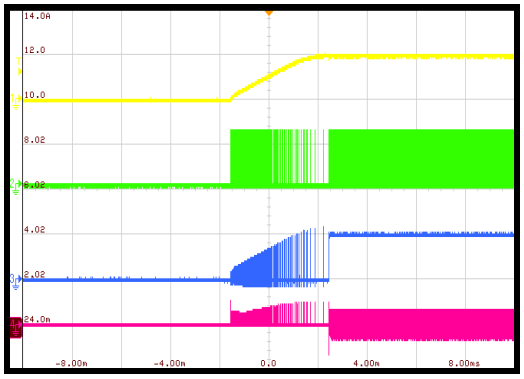


Start-Up through EN via I²C Command

Load = 3A

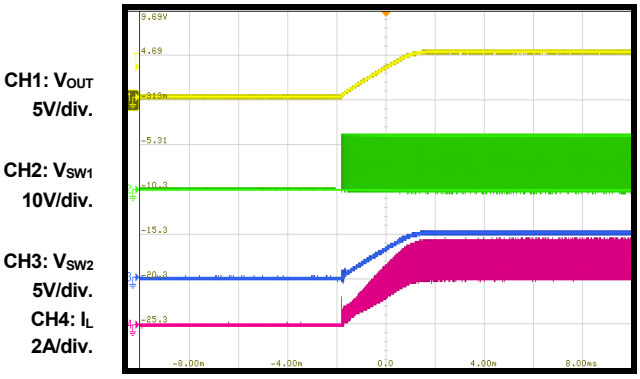


Shutdown through EN via I²C Command

Load = 0A

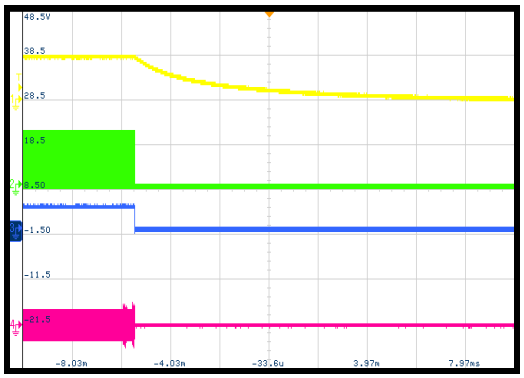


Shutdown through EN via I²C Command

Load = 3A

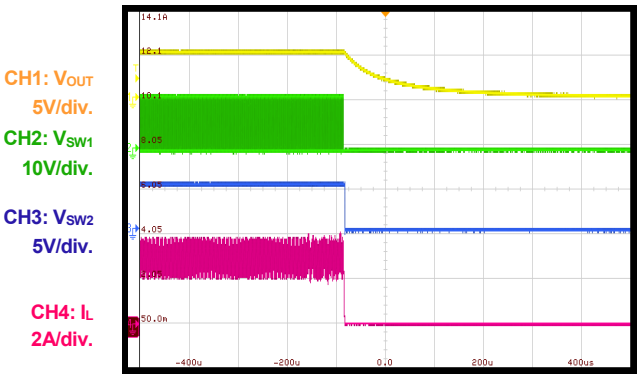


Start-Up through EN

Load = 0A

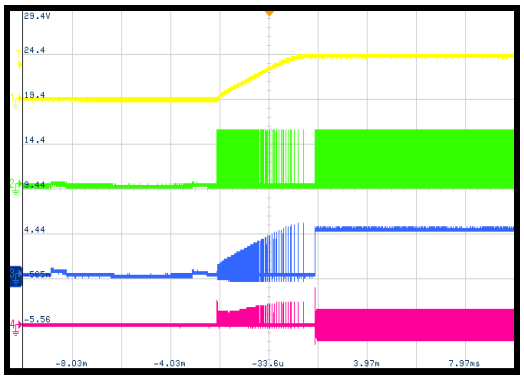

Start-Up through EN

Load = 3A

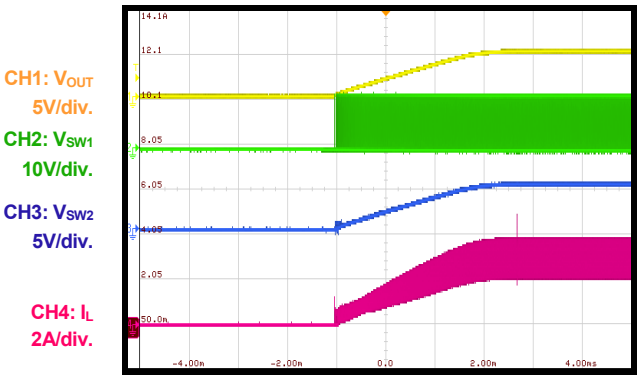


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, L = 4.7µH, f_{SW} = 500kHz, T_A = 25°C, unless otherwise noted.

Shutdown through EN
Load = 0A

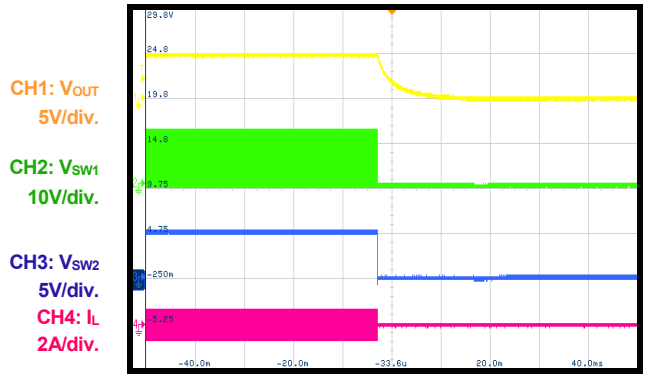


10ms/div.

Shutdown through EN
Load = 3A

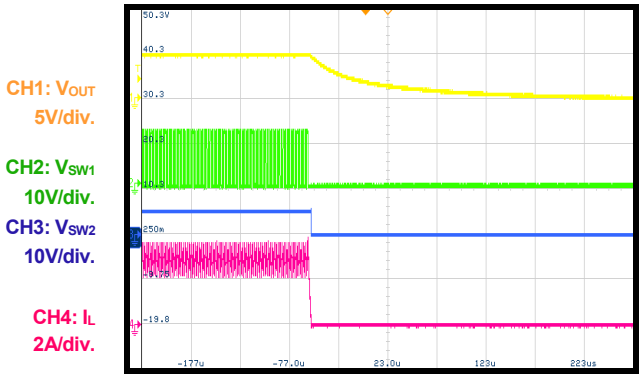


50µs/div.

Start-Up through VIN
Load = 0A

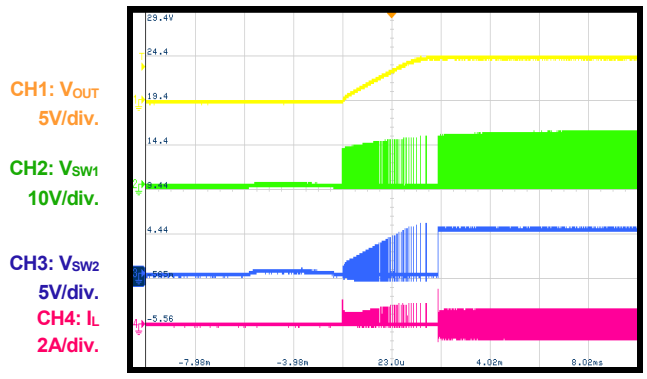


2ms/div.

Start-Up through VIN
Load = 3A

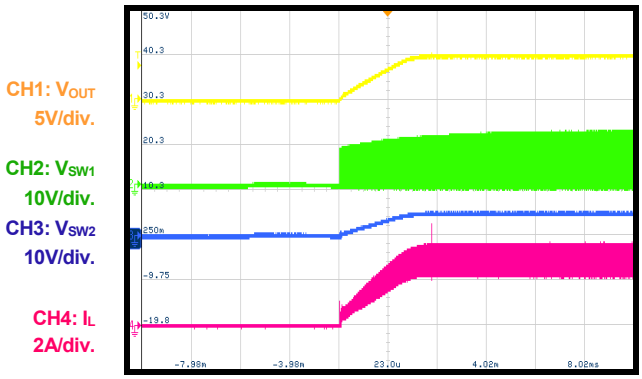


2ms/div.

Shutdown through VIN
Load = 0A

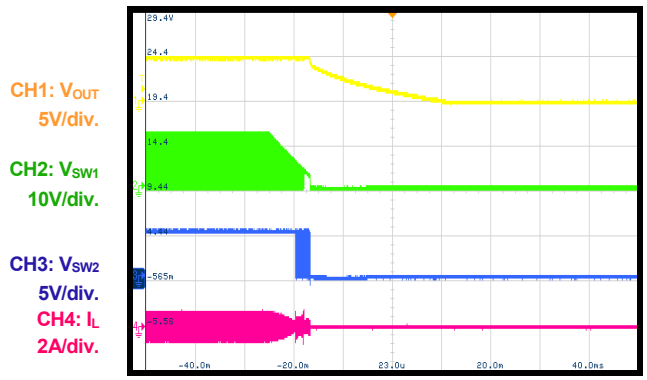

10ms/div.

Shutdown through VIN
Load = 3A

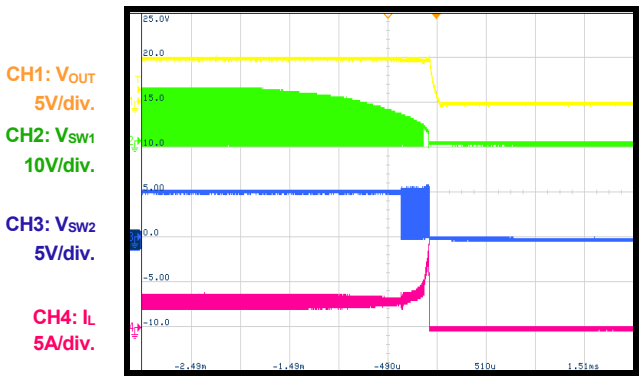

500µs/div.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, L = 4.7µH, f_{SW} = 500kHz, T_A = 25°C, unless otherwise noted.

Steady State


V_{OUT} = 5V, load = 0A, f_{SW} = 500kHz

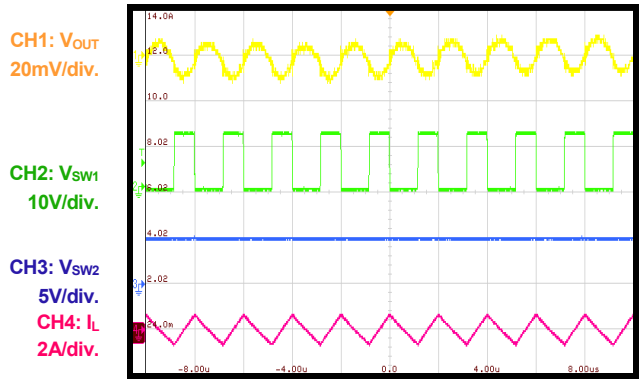

2µs/div.

Steady State


V_{OUT} = 5V, load = 3A, f_{SW} = 500kHz

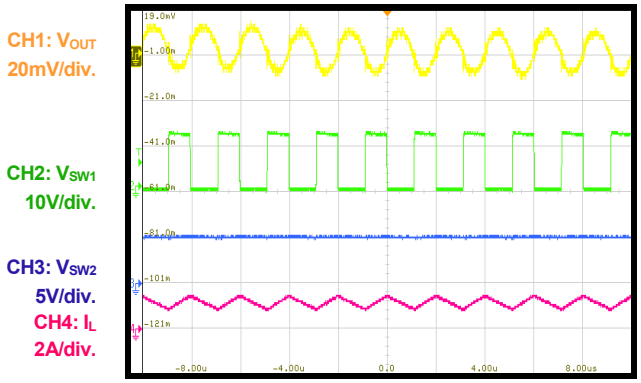

2µs/div.

Steady State


V_{OUT} = 5V, load = 0A, f_{SW} = 750kHz

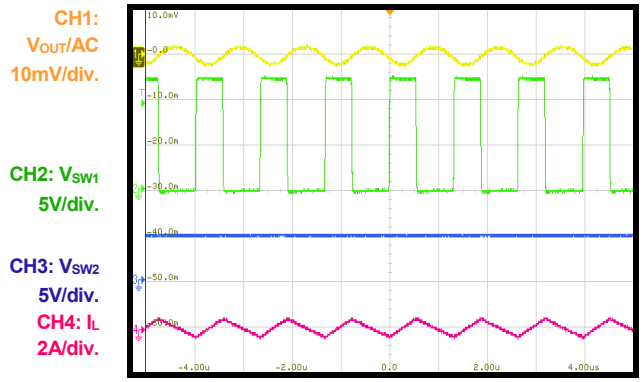

1µs/div.

Steady State


V_{OUT} = 5V, load = 3A, f_{SW} = 750kHz

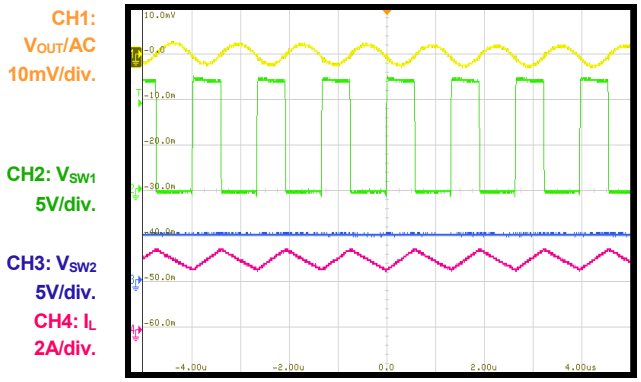

1µs/div.

I²C VID


V_{OUT} = 5V to 12V, I_{OUT} = 0A, R1 = 430kΩ, R2 = 53.6kΩ

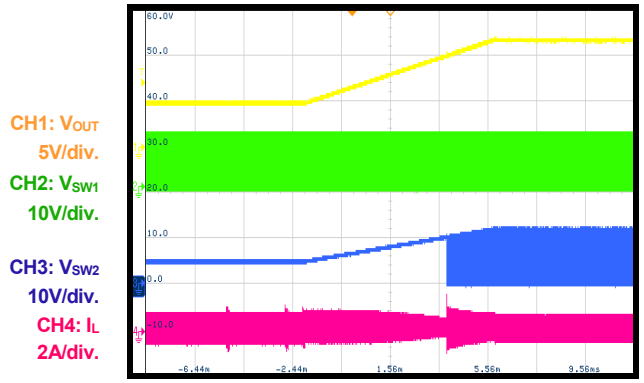

2ms/div.

I²C VID

V_{OUT} = 5V to 12V, I_{OUT} = 0A, R1 = 430kΩ, R2 = 53.6kΩ

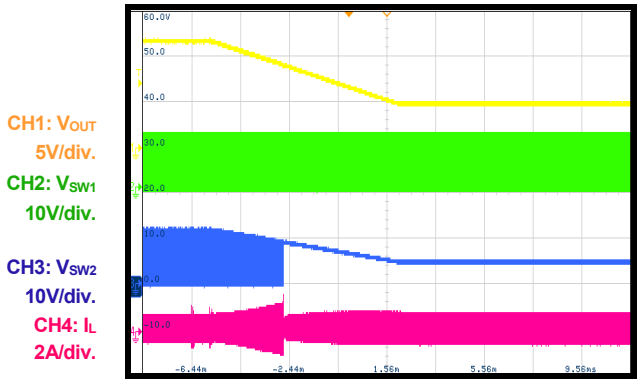

2ms/div.


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, L = 4.7µH, f_{SW} = 500kHz, T_A = 25°C, unless otherwise noted.

I²C VID


V_{OUT} = 5V to 12V, I_{OUT} = 3A, R1 = 430kΩ, R2 = 53.6kΩ

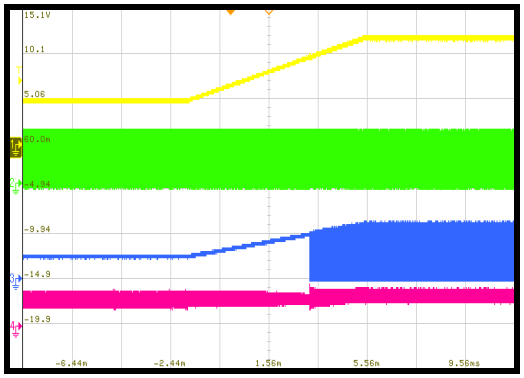

2ms/div.

I²C VID


V_{OUT} = 5V to 12V, I_{OUT} = 3A, R1 = 430kΩ, R2 = 53.6kΩ

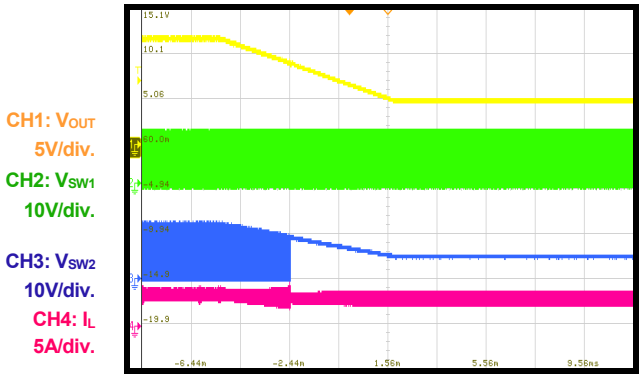

2ms/div.

Load Transient


V_{IN} = 12V, V_{OUT} = 5V, no line drop compensation, 0A to 1.5A, 150mA/µs

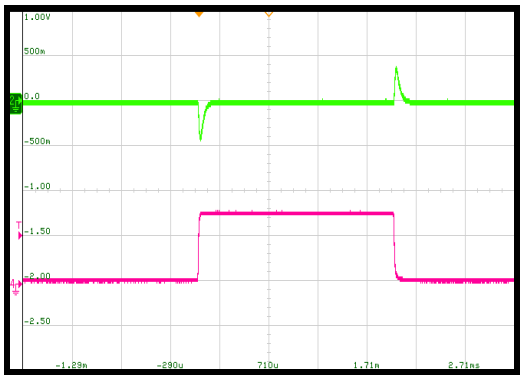

500µs/div.


Load Transient

V_{IN} = 12V, V_{OUT} = 5V, no line drop compensation, 1.5A to 3A, 150mA/µs

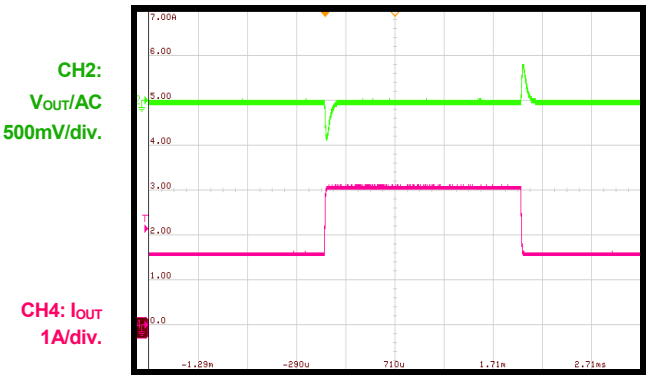


500µs/div.

SCP Entry in Latch-Off Mode

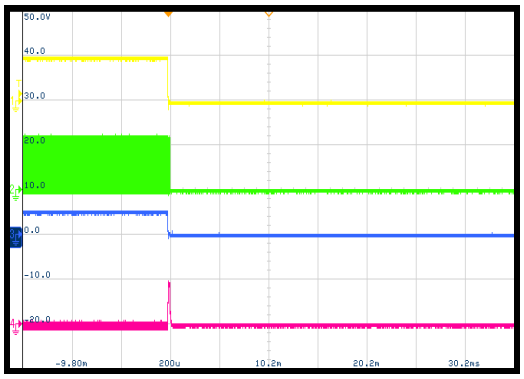

5ms/div.

SCP Entry in Hiccup Mode

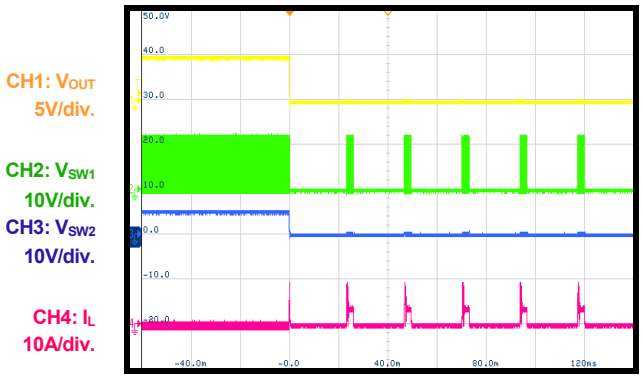


20ms/div.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, L = 4.7µH, f_{SW} = 500kHz, T_A = 25°C, unless otherwise noted.


SCP Recovery in Hiccup Mode

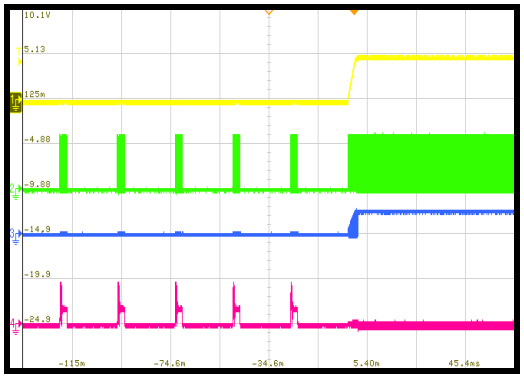

20ms/div.


CC Limit Entry

Tested in CV mode on an electronic load

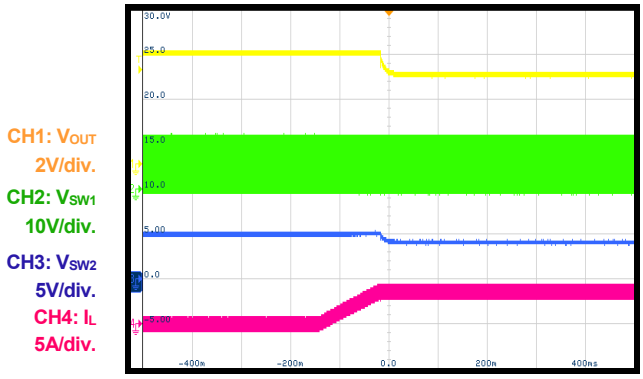


100ms/div.

CC Limit Steady State

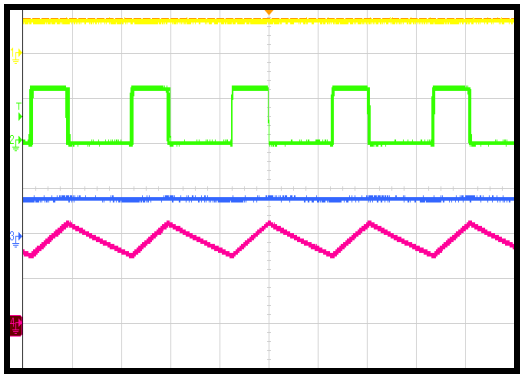


1µs/div.

V_{OUT} OVP in Hiccup Mode

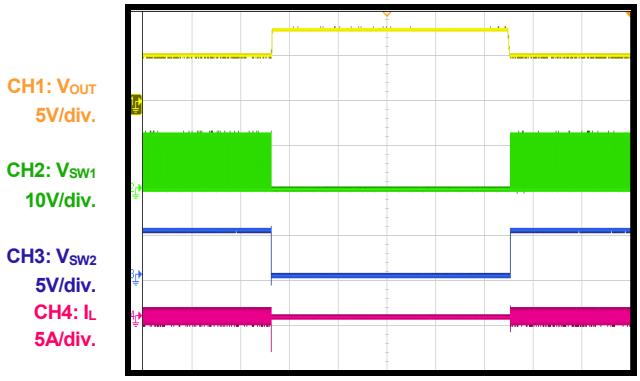

500ms/div.

V_{OUT} OVP in Latch-Off Mode

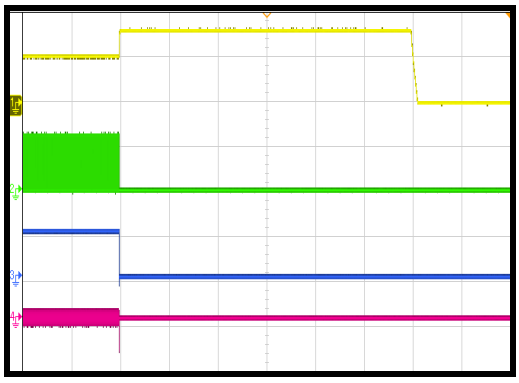

500ms/div.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

PCB LAYOUT

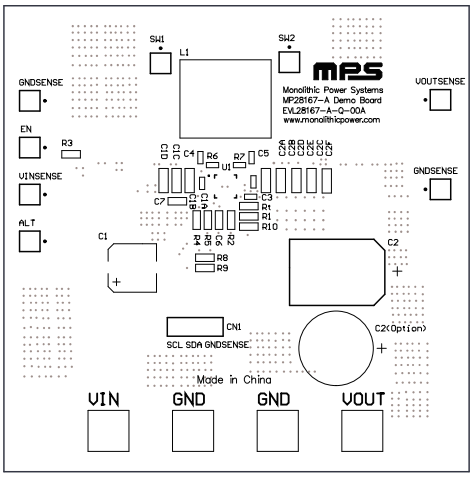


Figure 2: Top Silk

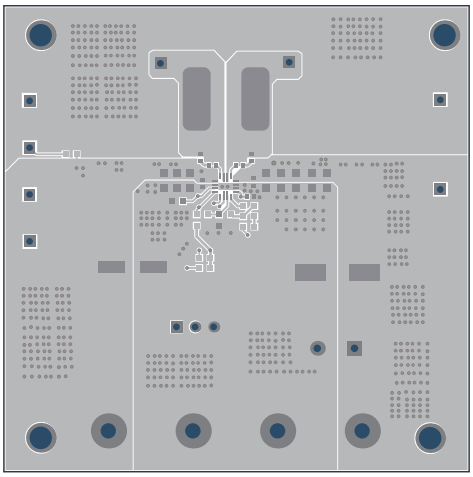


Figure 3: Top Layer

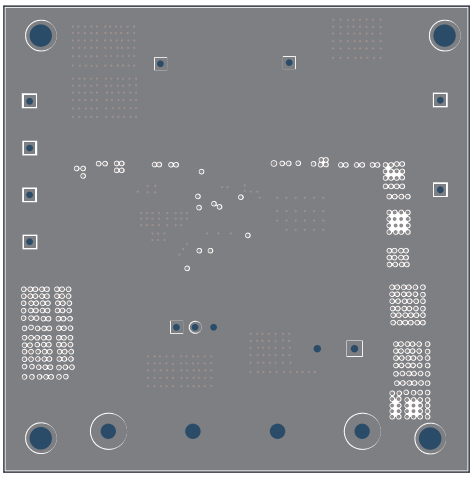


Figure 4: Mid-Layer 1

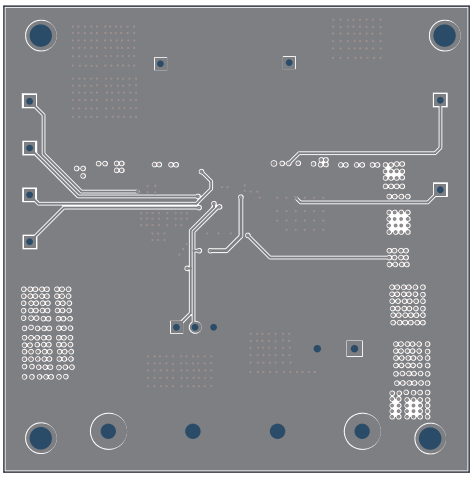


Figure 5: Mid-Layer 2

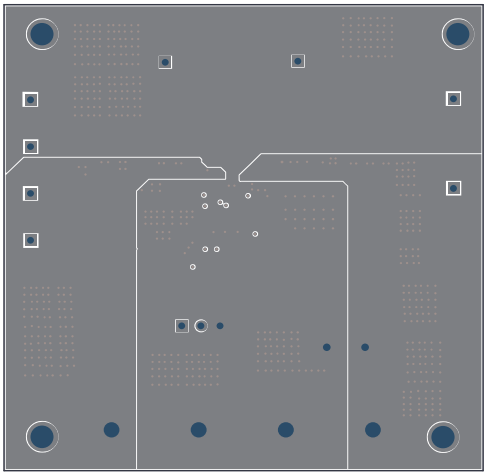


Figure 6: Bottom Layer

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	2/25/2021	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.