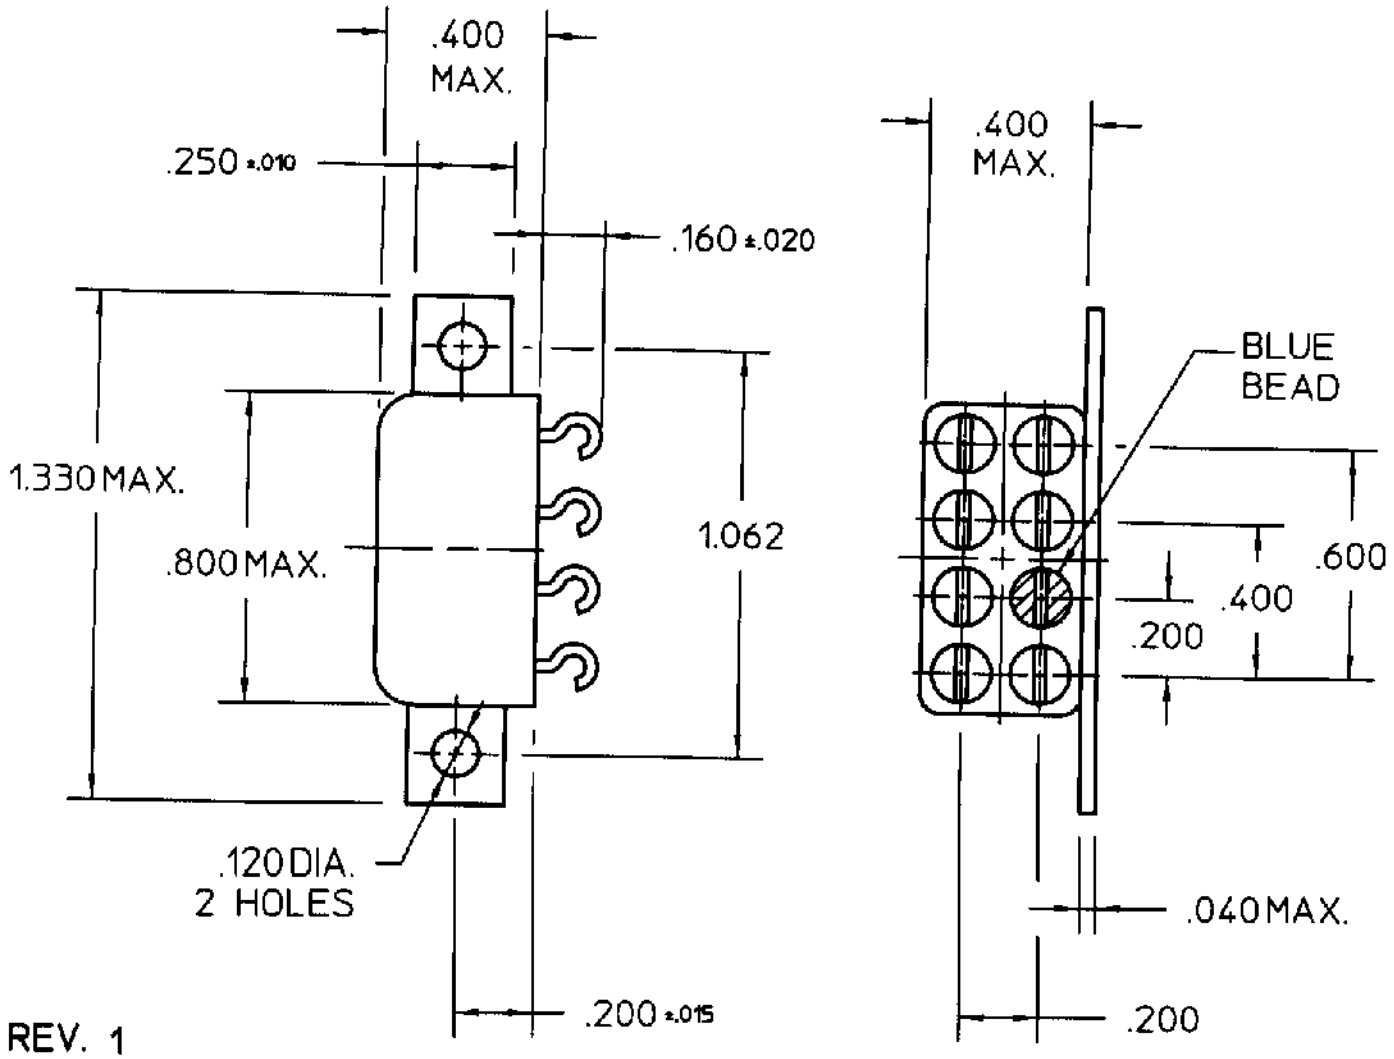


REV. 1

DCO 16187

COIL: @ 25°C

RESISTANCE 700 OHMS ±10%

NOMINAL VOLTAGE 20.0 - 30.0 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.0 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's


SHOCK 100 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

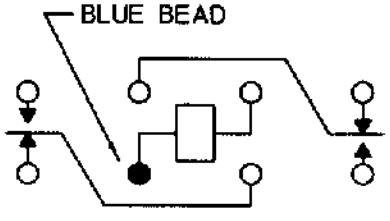

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMPS 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 9/20/99 CK. 3/27/08

COMMUNICATIONS INSTRUMENTS, INC.

CUST. GENICOM

CUST. NO. 3SAV5042H1 REV.

"HFW" RELAY

HFW1103K09

F-718 REV. 2