




Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings

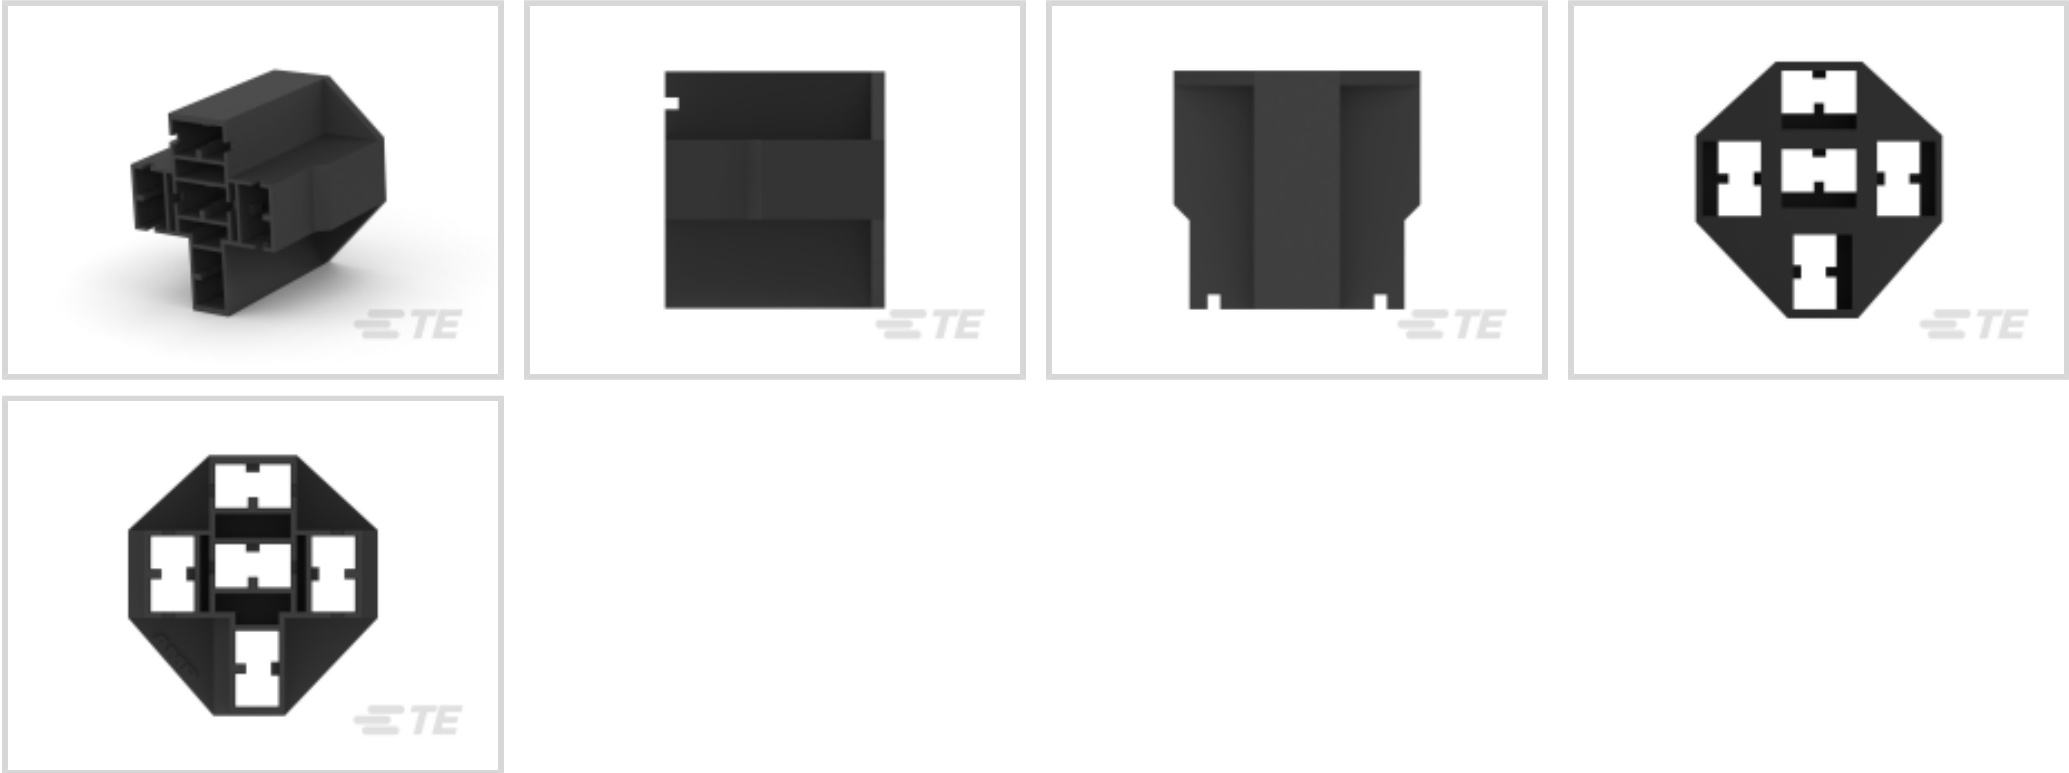

Terminal Type: **Receptacle**  
Connector & Housing Type: **Receptacle**  
Number of Positions: **5**  
Terminal Orientation: **Straight**  
UL Flammability Rating: **UL 94V-0**

Features

Product Type Features

|                                   |                             |
|-----------------------------------|-----------------------------|
| Connector & Contact Terminates To | Wire & Cable                |
| Sealable                          | No                          |
| Connector System                  | Wire-to-Board, Wire-to-Wire |
| Connector & Housing Type          | Receptacle                  |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Positions | 5 |
|---------------------|---|

Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features

|                          |            |
|--------------------------|------------|
| Terminal Type            | Receptacle |
| Terminal Orientation     | Straight   |
| Contact Mating Retention | Without    |

Mechanical Attachment

|                       |              |
|-----------------------|--------------|
| Mating Alignment Type | Polarization |
|-----------------------|--------------|



|                         |                            |
|-------------------------|----------------------------|
| Mating Alignment        | With                       |
| Connector Mounting Type | Cable Mount (Free-Hanging) |

Housing Features

|                    |                 |
|--------------------|-----------------|
| Housing Material   | Polyamide       |
| Centerline (Pitch) | 8.5 mm[.334 in] |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 105 °C[-40 – 221 °F] |
|-----------------------------|----------------------------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |        |
|--------------------|--------|
| Packaging Quantity | 1000   |
| Packaging Method   | Carton |

Product Compliance

For compliance documentation, visit the product page on TE.com>










|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2025 (250)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                                |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts
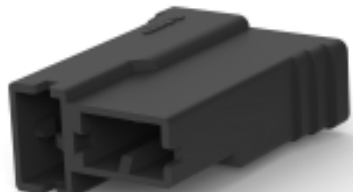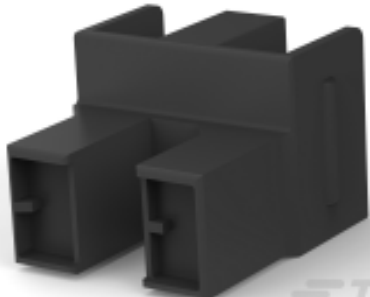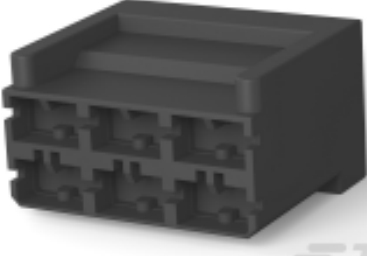
|                                                                                                                                            |                                                                                                                                                    |                                                                                                                                                     |                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>TE Part # 926523-1<br>3P.POS.LOCK HSG                 | <br>TE Part # 154717-3<br>PL 250 REC TERMINAL 14-11 AWG TPBR      | <br>TE Part # 1-160759-1<br>250 PL MKI REC. 20-15AWG PTBR        | <br>TE Part # 100100-1<br>2 POS POSITIVE LOCK (PL) HOUSING      |
| <br>TE Part # 790319-3<br>250 PL MKI REC. 12-10AWG PTBR  | <br>TE Part # 926522-2<br>PL 250 REC HSG 2P NYLON NAT            | <br>TE Part # 927076-1<br>PL HOUSING 0.6 PA 6.6 + PE-GF13 BLACK | <br>TE Part # 926716-1<br>PL 2P HOUSING PA 6.6 ZYTEL 101 BLACK |
| <br>TE Part # 926330-3<br>6P POS-LOCK BU GEH            | <br>TE Part # 1-926522-1<br>PL 250 REC HSG 2P NYLON BLACK       | <br>TE Part # 154718-3<br>PL 250 REC 0.7-2.0 MM2 0.406 TPBR    | <br>TE Part # 185010-2<br>HEADLIGHT HOUSING HOUSING           |
| <br>TE Part # 63812-1<br>250 PL MKI REC. 18-14AWG TPBR  | <br>TE Part # 927389-1<br>PL 3P HOUSING PA66 BLACK              | <br>TE Part # 926330-1<br>PL 250 REC HSG 6P NYLON BLACK        | <br>TE Part # 926521-2<br>PL 250 REC HSG 2P NYLON BLACK       |
| <br>TE Part # 926522-1<br>PL 250 REC HSG 2P NYLON BLACK | <br>TE Part # 927389-2<br>POSITIVE LOCK 3P HOUSING PA 6.6 WHITE |                                                                                                                                                     |                                                                                                                                                    |




Also in the Series | [Mark I](#)




[Automotive Headers\(5\)](#)



[Automotive Signal & Power Headers\(5\)](#)

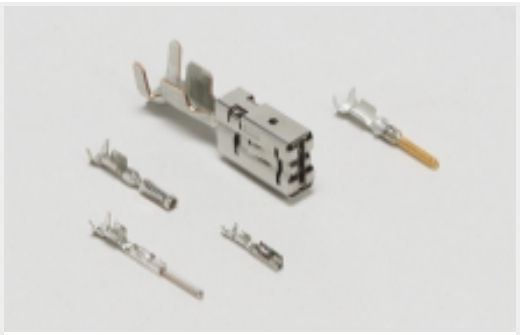

[Automotive Terminals\(1\)](#)

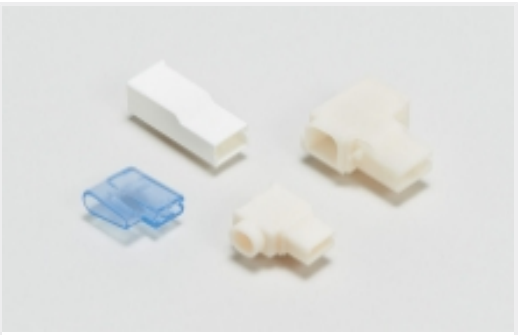

[Crimp Terminal Housings\(176\)](#)




[Insertion & Extraction Tools\(3\)](#)




[Quick Disconnects\(171\)](#)

Also in the Series | [Positive Lock 250](#)

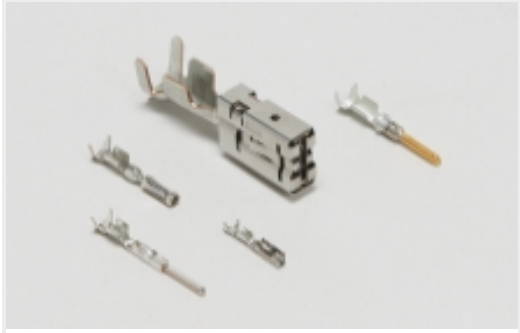

[Automotive Terminals\(1\)](#)

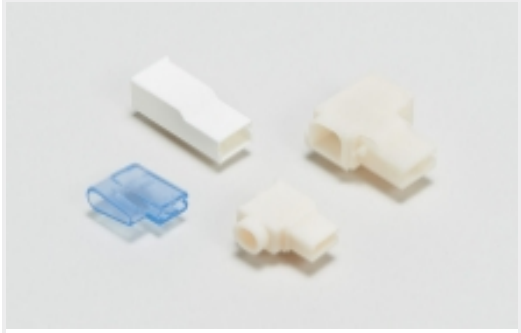

[Crimp Terminal Housings\(176\)](#)



[Insertion & Extraction Tools\(3\)](#)



[Insulation Boots & Sleeves\(5\)](#)




[Quick Disconnects\(171\)](#)


Customers Also Bought




TE Part #160789-2  
RING TONGUE IS 1.0-2.5 MM2 TPBR

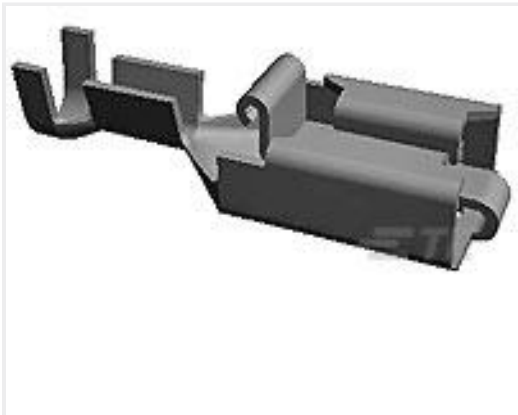


TE Part #341002-6  
PL 250 REC TERMINAL 18-14 PTPB LP

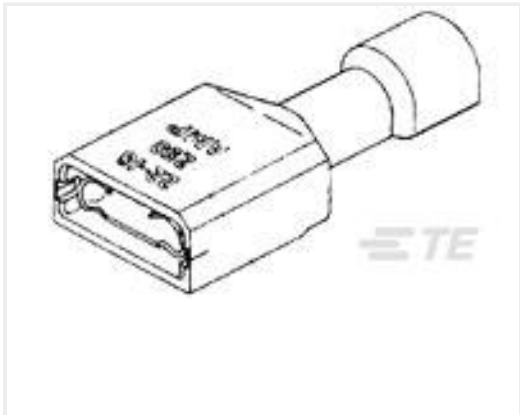

TE Part #2-520081-2  
ULTRAFAST 110 ASSY REC 22-18 TPBR LP

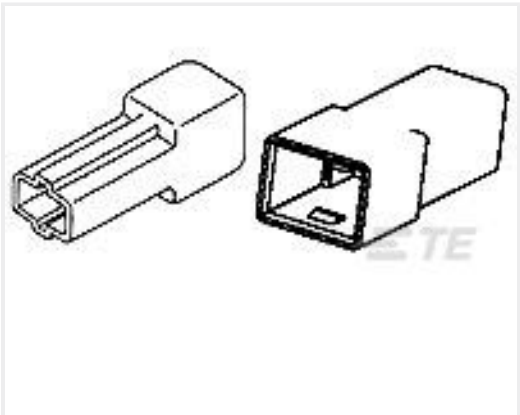

TE Part #521289-1  
FF 250 TAB HSG 1P NYLON NAT TPBR LP

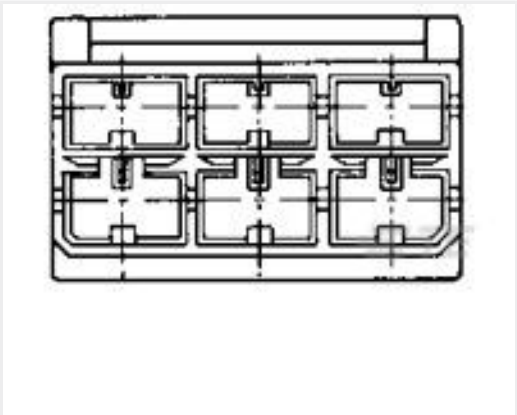

TE Part #926330-1  
PL 250 REC HSG 6P NYLON BLACK



TE Part #964282-1  
JPT A REC 2.8 Contact SWS Sn



TE Part #CAT-T4827-CH8172  
Timer Connector Housing



TE Part #8-1625984-0  
HSA50 6R8 5%

Documents

Product Drawings

PL MKI 250 REC HSG 5P NYLON BLACK

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_926526-1\_P.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_926526-1\_P.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_926526-1\_P.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

Agency Approvals

UL Report

English