



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

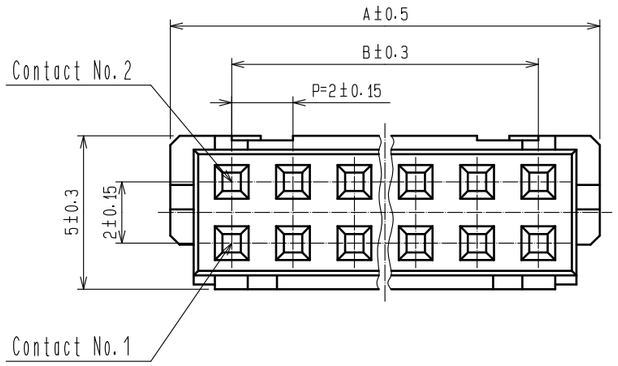


⚠1 Recommended PCB layout
(Recommended thickness t=1.6mm)

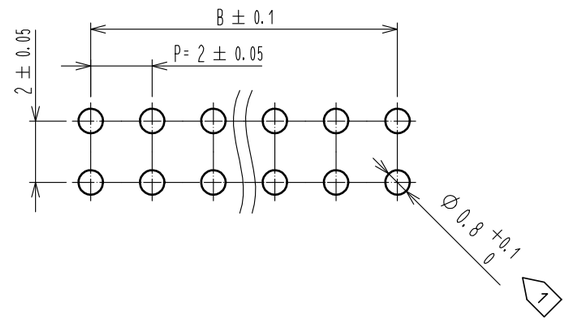

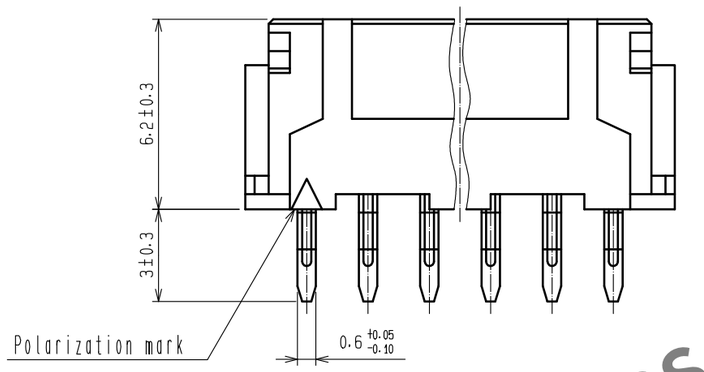

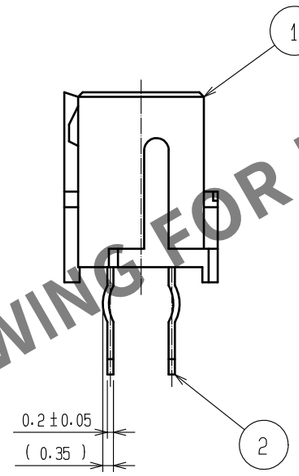

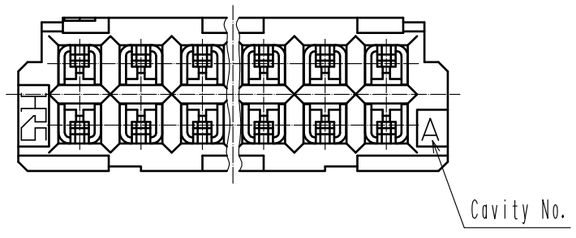

CODE No.	PART No.	NUMBER OF CONTACT	A	B
543-0553-9-06	DF11- 6DS-2DSA(06)	6	8.0	4.0
543-0554-1-06	DF11- 8DS-2DSA(06)	8	10.0	6.0
543-0555-4-06	DF11-10DS-2DSA(06)	10	12.0	8.0
543-0556-7-06	DF11-12DS-2DSA(06)	12	14.0	10.0
543-0557-0-06	DF11-14DS-2DSA(06)	14	16.0	12.0
543-0558-2-06	DF11-16DS-2DSA(06)	16	18.0	14.0
543-0559-5-06	DF11-18DS-2DSA(06)	18	20.0	16.0
543-0560-4-06	DF11-20DS-2DSA(06)	20	22.0	18.0
543-0561-7-06	DF11-22DS-2DSA(06)	22	24.0	20.0
543-0562-0-06	DF11-24DS-2DSA(06)	24	26.0	22.0
543-0563-2-06	DF11-26DS-2DSA(06)	26	28.0	24.0
543-0564-5-06	DF11-28DS-2DSA(06)	28	30.0	26.0
543-0565-8-06	DF11-30DS-2DSA(06)	30	32.0	28.0
543-0566-0-06	DF11-32DS-2DSA(06)	32	34.0	30.0

HRS DRAWING FOR REFERENCE

⚠1 Notes 1 If pre-fixation to PCB before flow soldering is required, through hole dimension shall be $\phi 0.8^{+0.05}_{-0}$.
2. The minimum order quantity is by the one pack amount '100 pieces'.

NO.	MATERIAL	FINISH , REMARKS
1	Polyamide	UL94V-0, Black
2	Brass	Contact area : Gold plated 0.2μm min. Lead area : Tin plated 2μm min. Under plating : Nickel plated 1μm min.

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	⚠1	2	DIS-H-00002846	TS. MIYAKI	TS. FUKUSHIMA	17. 05. 22

HRS HIROSE ELECTRIC CO., LTD.

APPROVED	KJ. KATAYOSE	05. 01. 05	DRAWING NO. EDC3-162401-02
CHECKED	TY. OMA	05. 01. 05	PART NO. DF11-*DS-2DSA(06)
DESIGNED	IO. DENPOUYA	05. 01. 05	CODE NO. CL543- ⚠1 1/1
DRAWN	IO. DENPOUYA	05. 01. 05	