2-2330552-2 ✔ ACTIVE

TE Internal #: 2-2330552-2

Carrier, Black, PC + ABS

View on TE.com >

Connectors > Connector Accessories > Connector Caps & Covers



Connector Cover Type: **Carrier**

Primary Product Color: **Black**

Primary Product Material: **PC + ABS**

Operating Temperature (Max): **100 °C [212 °F]**

Operating Temperature Range: **-25 – 100 °C [-13 – 212 °F]**

Features

Product Type Features

Connector Cover Type	Carrier

Body Features

Primary Product Color	Black
Primary Product Material	PC + ABS

Usage Conditions

Operating Temperature (Max)	100 °C[212 °F]
Operating Temperature Range	-25 – 100 °C[-13 – 212 °F]

Industry Standards

UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Box & Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240)

	Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

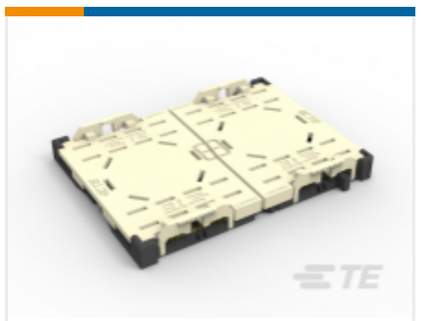


TE Part # 1-2324271-1
RIGHT SEGMENT LGA4189-4 SOCKETP4 FOR ODM

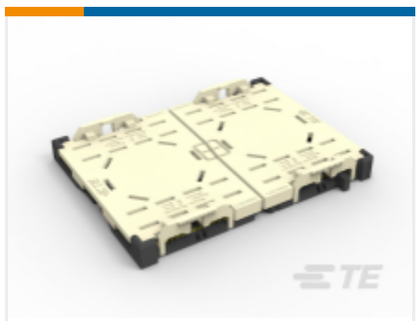


TE Part # 1-2324271-2
LEFT SEGMENT LGA4189-4 SOCKET-P4 FOR ODM

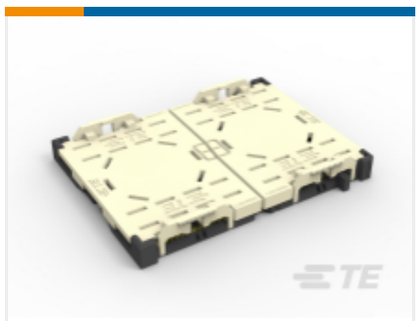


TE Part # 1-2324271-3
RIGHT SEGMENT LGA4189-4 SOCKETP4 FOR ODM

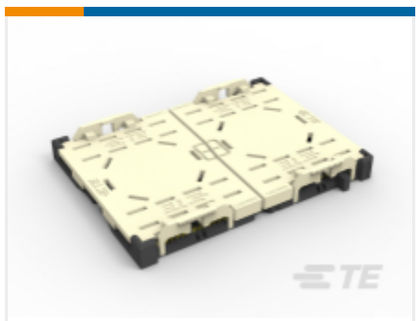

TE Part # 1-2324271-4
LEFT SEGMENT LGA4189-4 SOCKET-P4 FOR ODM

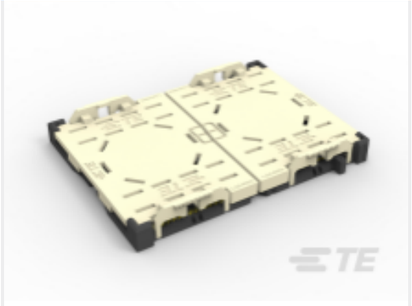


TE Part # 1-2332283-1
LGA4189-4 SOCKET P4 KIT FOR ODM (30U AU)

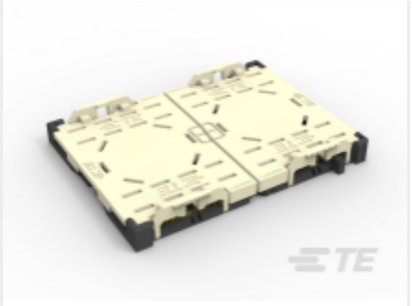

TE Part # 1-2332283-2
LGA4189-4 SOCKET P4 KIT FOR ODM (15U AU)

Customers Also Bought

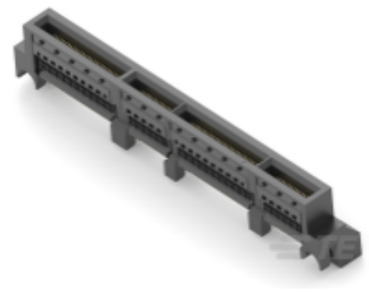


TE Part #2-2340321-1
ASSY STRADDLE MOUNT 168P 093 SLIVER 2.0




TE Part #4-1734774-0
PCI EXP 2.3L 164 POS BLK 15u"



TE Part #1-1513472-9
UAM ASSEMBLY 85 MM CABLE GREY

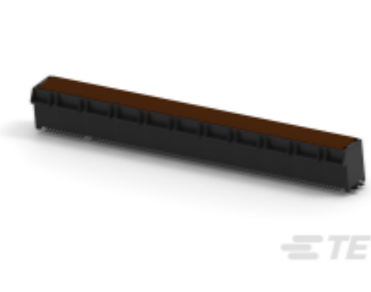

TE Part #5-2337939-8
PCIE GEN4 CON,SMT,164POS,30u",MYLAR,HT

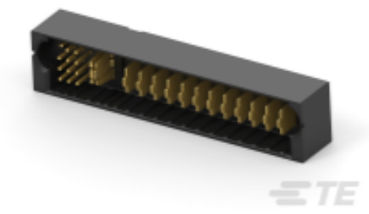

TE Part #6450821-6
MBXL VERT HDR 12S+2HDP+12LP

TE Part #2373624-4
Rcpt Assy,Diecast Housing,PCIe Gen 5

TE Part #2355331-5
CAGE ASSY, QSFP28 1X1, SPRING, HS

TE Part #2379420-2
SOCKET E1 TFLM KIT W/ COVER

TE Part #2418324-1
DDR5 NORMAL BLACK HSG & BLACK LATCH

TE Part #5-2468605-3
ASSY STRADDLE MOUNT 168P 062 SLIVER 2.0

Documents

Product Drawings

ICX POINT PHM CARRIER ASSY, P4

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2330552-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2330552-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2330552-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

LGA 4189 Socket and Hardware

English

1-1773982-5-lga_4189_flyer_cn

English

Product Specifications

Application Specification

English