
REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650743~747	2016/05/18	Ruru	Change Logo & Note


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

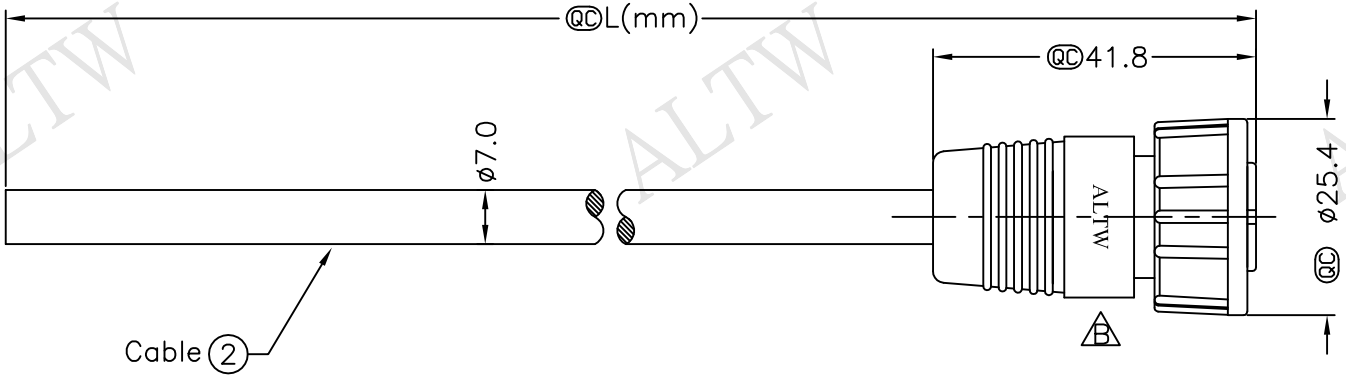


ALTW
CONFIDENTIAL
2016.05.18
R&D DEPT.

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.05.26
ISSUED

CD-14BFFM-SL6000 (1)
Color: Black



Conn.



Pin Assignments
Front View

Conn.	Pin Out	Wire Color
14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淺綠
11	Purple	紫
10	Orange	橘
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Grey	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕

CD-14BFFM-SL6AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

Note:
* QC Important Dimension To Check.
* Waterproof Rate: IP66
* Housing: Nylon+GF,Black
* Female Pin: Copper Alloy,Gold Plated
* Cable: UL2464 24AWG*14C+Drain+Al/My, Black,PVC Jacket UV Resistant, OD=7.0
B * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	TITLE: Middle, Cable Screw 14Pin F Conn F Pin	ITEM NO	DRAWN BY: Ruru / DATE: 2016/05/18
TOLERANCE: ±0.5 mm	SCALE: Free / SHEET: 1 OF 1	DWG NO: CD-14BFFM-SL6AXX	CHECKED BY: Rita / DATE: 2016/05/18
	REV: B / SIZE: A4 / QC :Inspection Item	CUSTOMER: ALTW	APPROVED BY: Lisa / DATE: 2016/05/18

Amphenol LTW
安費諾亮泰企業股份有限公司

FMWI0702-01-01A2