
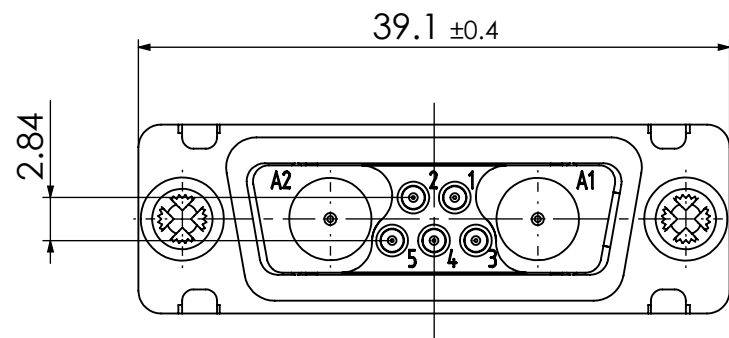
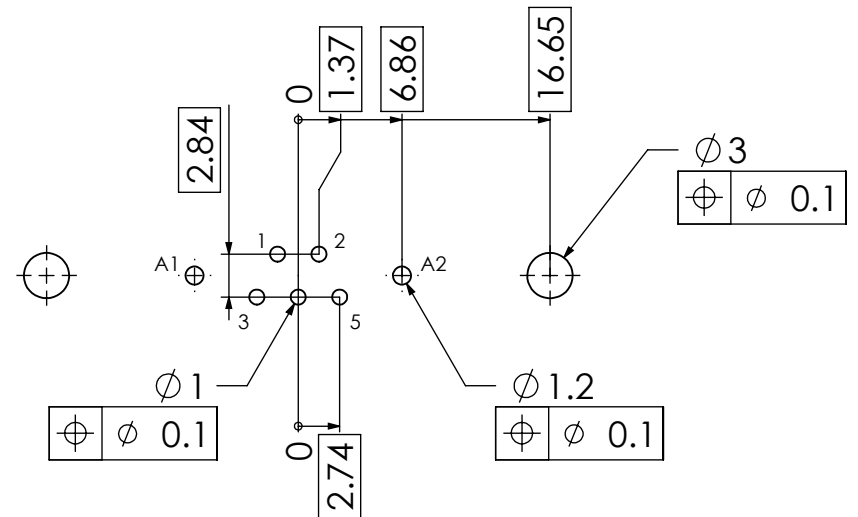
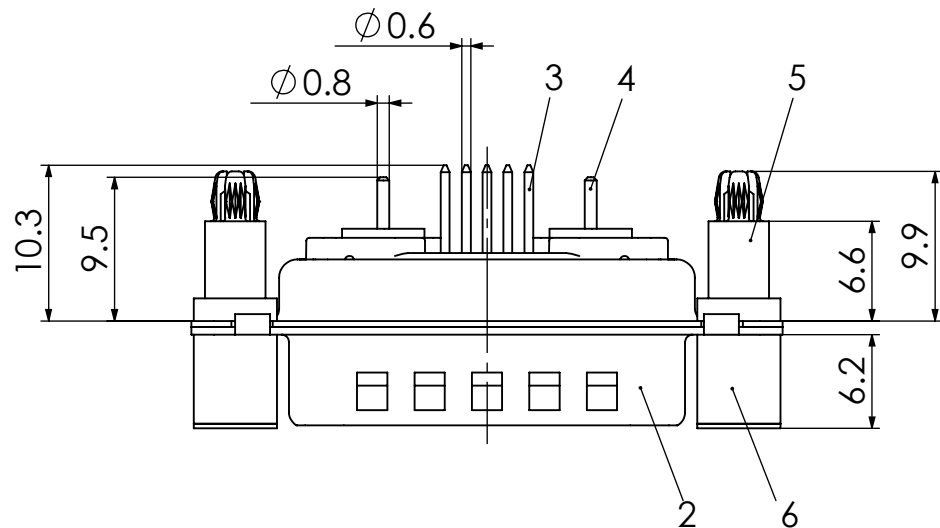
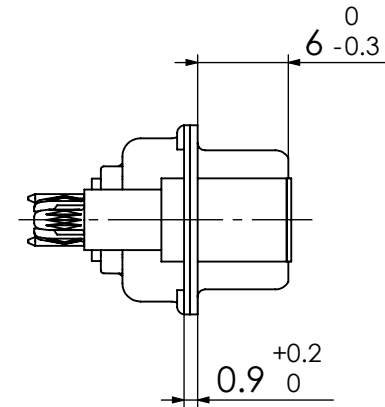


RoHS compliant
by exemption

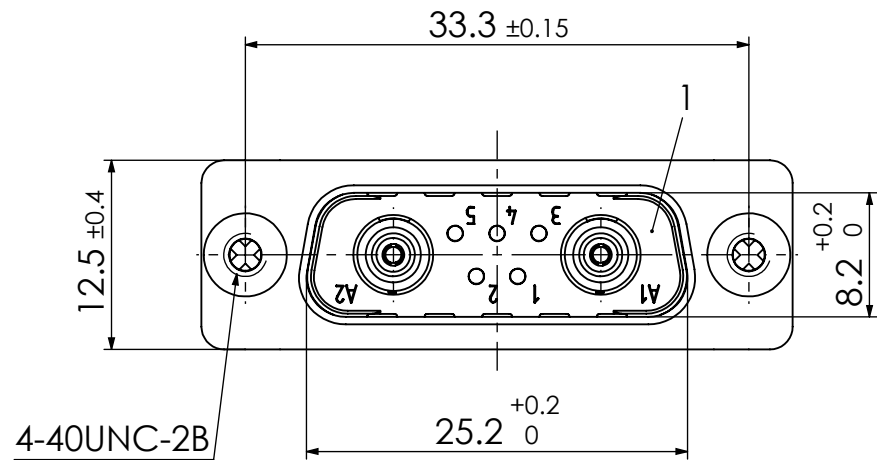

6	2	Support sleeve	Brass	tin plated
5	2	Snap-in bolt	PCB 1.6mm / Brass	tin plated
4	2	High voltage contact	FMV005P107K	
3	5	Signal contact	P1 / Brass	0.8µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS F = 0 F = 0 F = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex		
	mm		2:1							
					CURRENT REVISION			FCT D-Sub Mixed-Layout Connector		
					DRWN: DRAWN BY msteinbrueck 06-09-2023					
					APPR: APPR BY mteubel 15-09-2023					
	2		24410		INITIAL REVISION			PRODUCT CUSTOMER DRAWING		
1				DRWN: DRAWN BY birgit.rinder 26-02-2008			MATERIAL NUMBER		REVISION	
REV.		CH.-NO.		APPR: APPR BY sschref 26-02-2008			1731070668		2	
REPLACEMENT FOR:			FRIST ANGLE PROJECTION		DRAWING		DOCUMENT NUMBER		CUSTOMER	SHEET NUMBER
1731070668_Rev. A1					A3-SIZE		FM7W2P1-2378		GENERAL MARKET	1 OF 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.