

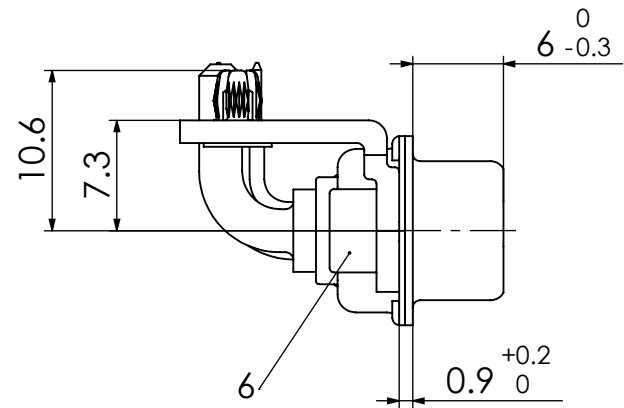
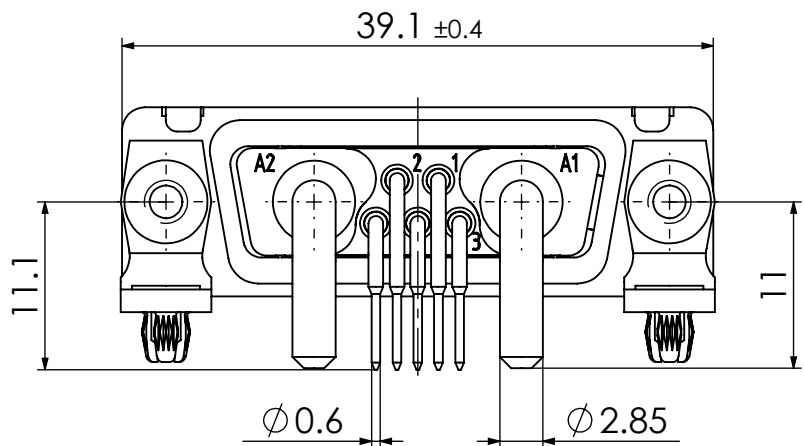
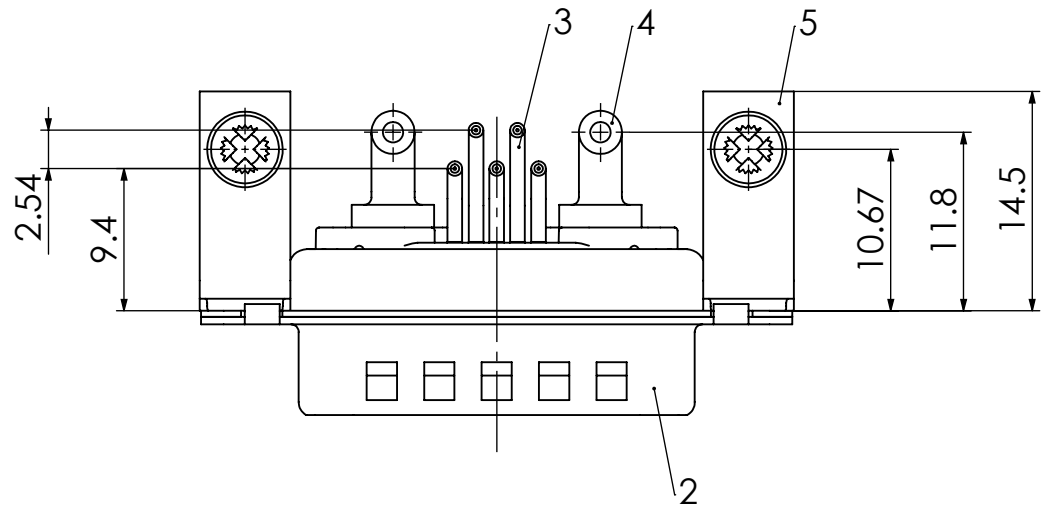


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.

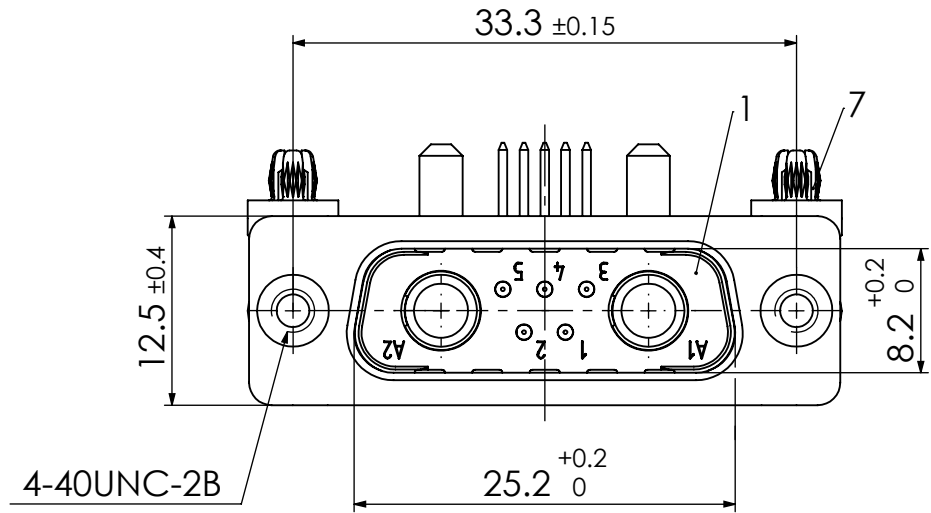

PCB hole pattern, mounting side

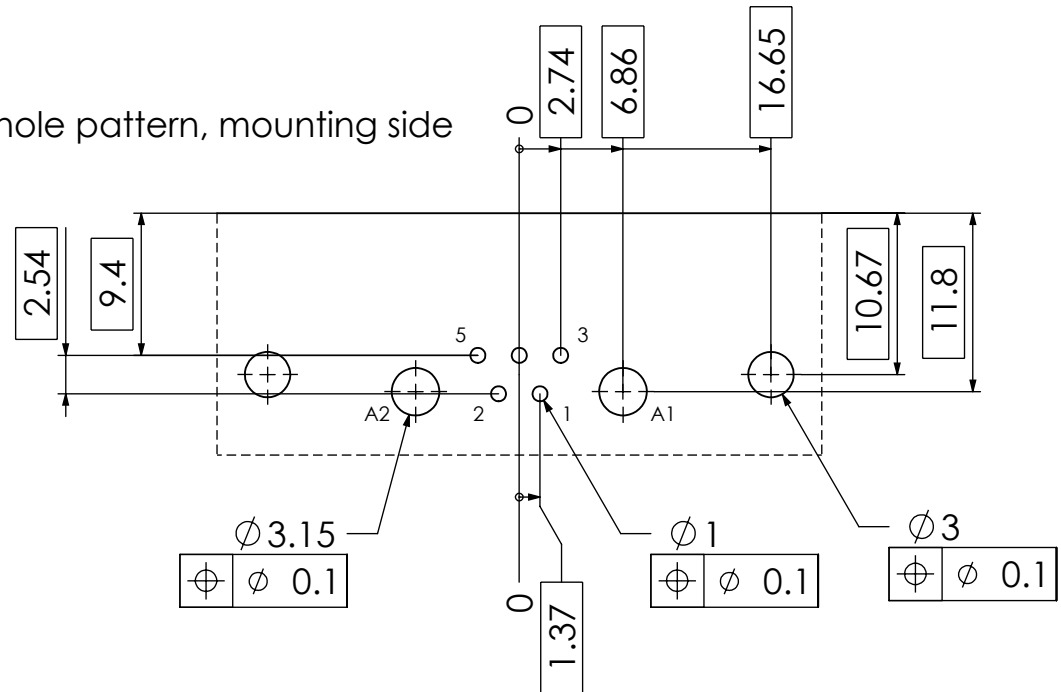

7	2	Snap-in rivet	PCB 1.6mm / Brass	tin plated
6	2	Clinch nut	MW 4-40 / Steel	tin plated
5	2	Bracket	F1080-13B / Steel	tin plated
4	2	High power contact	FMP008P104R	20A
3	5	Signal contact	P5 / Brass	0,8µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PCT (-55°C to +150°C)	natural
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class
FUNCTIONAL SYMBOLS				
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
DIMENSION UNITS		SCALE	MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m	
mm		2:1		
			CURRENT REVISION	
			DRWN: DRAWN BY	msteinbrueck 17-08-2023
			APPR: APPR BY	fvetter 22-08-2023
			INITIAL REVISION	
			DRWN: DRAWN BY	mpostulka 07-07-2009
			APPR: APPR BY	Markus.Jobst 07-07-2009
			PRODUCT CUSTOMER DRAWING	
			MATERIAL NUMBER	
			1731070217	
			REVISION	
			3	
			DOCUMENT NUMBER	
			FH7W2P5-1343	
			CUSTOMER	
			GENERAL MARKET	
			SHEET NUMBER	
			1 OF 1	