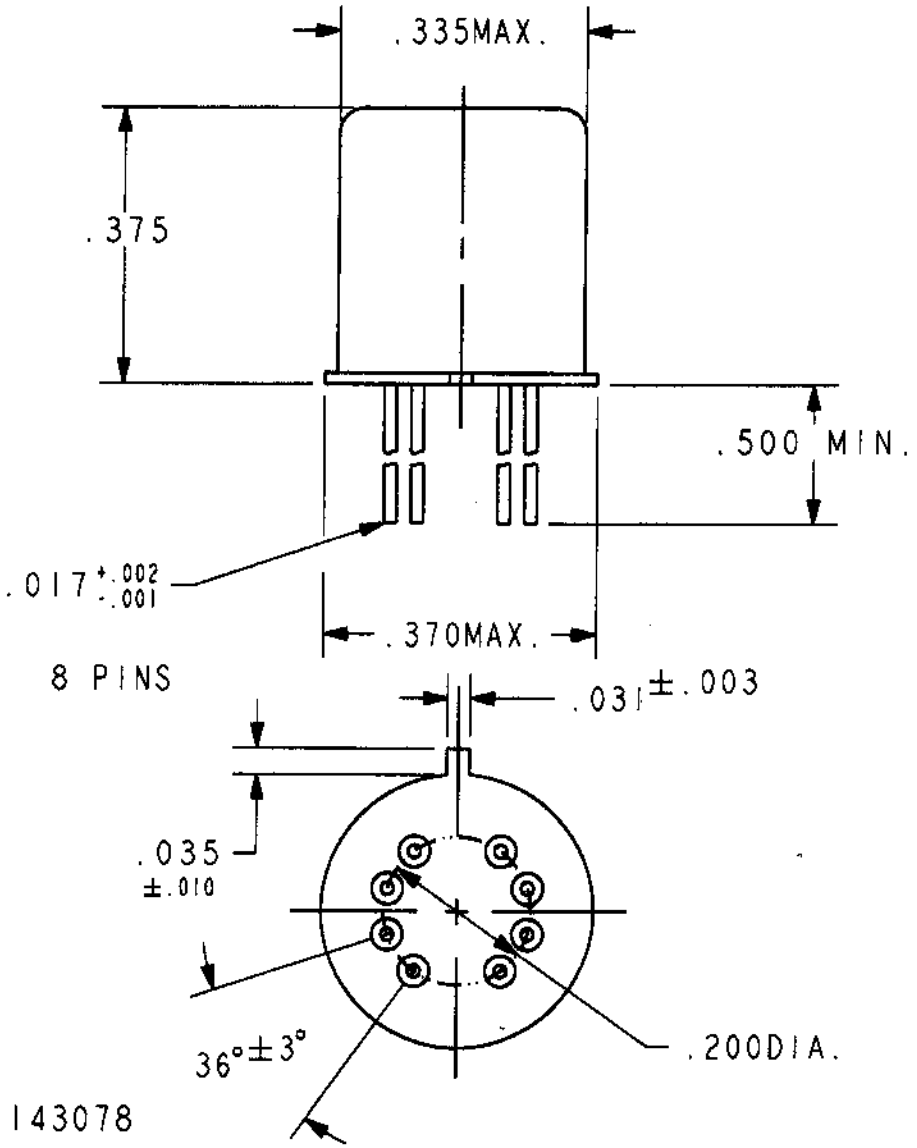


REV. 0
DCO# 143078

COIL: @ 25°C

RESISTANCE 100 OHMS ±10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.6 VDC

MUST RELEASE 1.4 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +.125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 2.0 MS MAX
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28VDC RESISTIVE 100,000 OPERATIONS

DR. BSH 07/09/01 CK 9/9/01

CII Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M39016/11-033L REV. 0

"JMS" RELAY

JMSC-5XL

F-718 REV. 3