PRODUCT NEWS

Product Discontinuation Notices

Proximity Sensor

OMRON

Issue Date
Dec. 9th, 2020

No. OMSQ-ALD201249

Discontinuation Notice of Proximity sensor some of model E2A series.

Product Discontinuation	Recommended Replacement
Proximity sensor	Proximity sensor
Model E2A Series	**Model E2E-Next Series**

[Final order entry date]
The end of January 2022.

[Date of The Last Shipping]
The end of June 2022

[Scheduled date of maintenance close]
The end of March 2022

[Caution on recommended replacement]
E2E-Next series has the "I/O-Link" connection method.

[Difference from discontinued product]

Recommended replacement Model	Body Color	Dimen-sions	Wire connection	Mounting Dimensions	Charac-teristics	Operation ratings	Operation methods
E2E Next series	*	*	*	**	*	*	-

** : Compatible
* : The change is a little/Almost compatible
-- : Not compatible
- : No corresponding specification

[The models that will not be discontinued.]
The part of E2A series will not discontinued in Mar.2022 (Check Table.2 in Page 21~)

[Product Discontinuation and recommended replacement.]
As following table E2A product will be discontinued in Mar.2022.
Table.1

Product discontinuation	Recommended replacement
E2A-M12KS04-WP-B1 2M OMC	E2E-X4B1T12 2M
E2A-M12KN08-WP-B1 2M OMC	E2E-X8MB1T12 2M
E2A-M18KS08-WP-B1 2M OMC	E2E-X8B1T18 2M
E2A-M18KN16-WP-B1 2M OMC	E2E-X16MB1T18 2M
E2A-M30KS15-WP-B1 2M OMC	E2E-X15B1T30 2M
E2A-M30LN30-WP-B1 2M OMC	E2E-X30MB1TL30 2M
E2A-M12KS04-WP-B1 5M OMC	E2E-X4B1T12 5M

Product discontinuation	Recommended replacement
E2A-M12KN08-WP-B1 5M OMC	E2E-X8MB1T12 5M
E2A-M18KS08-WP-B1 5M OMC	E2E-X8B1T18 5M
E2A-M18KN16-WP-B1 5M OMC	E2E-X16MB1T18 5M
E2A-M30KS15-WP-B1 5M OMC	E2E-X15B1T30 5M
E2A-M30LN30-WP-B1 5M OMC	E2E-X30MB1TL30 5M
E2A-M12KS04-WP-B2 2M OMC	E2E-X4B212 2M
E2A-M12KN08-WP-B2 2M OMC	E2E-X8MB212 2M
E2A-M18KS08-WP-B2 2M OMC	E2E-X8B218 2M
E2A-M18KN16-WP-B2 2M OMC	E2E-X16MB218 2M
E2A-M30KS15-WP-B2 2M OMC	E2E-X15B230 2M
E2A-M30LN30-WP-B2 2M OMC	E2E-X30MB2L30 2M
E2A-M12KS04-WP-B2 5M OMC	E2E-X4B212 5M
E2A-M12KN08-WP-B2 5M OMC	E2E-X8MB212 5M
E2A-M18KS08-WP-B2 5M OMC	E2E-X8B218 5M
E2A-M18KN16-WP-B2 5M OMC	E2E-X16MB218 5M
E2A-M30KS15-WP-B2 5M OMC	E2E-X15B230 5M
E2A-M30LN30-WP-B2 5M OMC	E2E-X30MB2L30 5M
E2A-M12KS04-WP-C1 2M OMC	E2E-X4C112 2M
E2A-M12KN08-WP-C1 2M OMC	E2E-X8MC112 2M
E2A-M18KS08-WP-C1 2M OMC	E2E-X8C118 2M
E2A-M18KN16-WP-C1 2M OMC	E2E-X16MC118 2M
E2A-M30KS15-WP-C1 2M OMC	E2E-X15C130 2M
E2A-M30LN30-WP-C1 2M OMC	E2E-X30MC1L30 2M
E2A-M12KS04-WP-C1 5M OMC	E2E-X4C112 5M
E2A-M12KN08-WP-C1 5M OMC	E2E-X8MC112 5M
E2A-M18KS08-WP-C1 5M OMC	E2E-X8C118 5M
E2A-M18KN16-WP-C1 5M OMC	E2E-X16MC118 5M
E2A-M30KS15-WP-C1 5M OMC	E2E-X15C130 5M
E2A-M30LN30-WP-C1 5M OMC	E2E-X30MC1L30 5M
E2A-M12KS04-WP-C2 2M OMC	E2E-X4C212 2M
E2A-M12KN08-WP-C2 2M OMC	E2E-X8MC212 2M
E2A-M18KS08-WP-C2 2M OMC	E2E-X8C218 2M
E2A-M18KN16-WP-C2 2M OMC	E2E-X16MC218 2M
E2A-M30KS15-WP-C2 2M OMC	E2E-X15C230 2M
E2A-M30LN30-WP-C2 2M OMC	E2E-X30MC2L30 2M
E2A-M12KS04-WP-C2 5M OMC	E2E-X4C212 5M
E2A-M12KN08-WP-C2 5M OMC	E2E-X8MC212 5M
E2A-M18KS08-WP-C2 5M OMC	E2E-X8C218 5M
E2A-M18KN16-WP-C2 5M OMC	E2E-X16MC218 5M
E2A-M30KS15-WP-C2 5M OMC	E2E-X15C230 5M
E2A-M30LN30-WP-C2 5M OMC	E2E-X30MC2L30 5M
E2A-M12KS04-M1-B1 OMC	E2E-X4B1T12-M1
E2A-M12KN08-M1-B1 OMC	E2E-X8MB1T12-M1
E2A-M18KS08-M1-B1 OMC	E2E-X8B1T18-M1
E2A-M18KN16-M1-B1 OMC	E2E-X16MB1T18-M1
E2A-M30KS15-M1-B1 OMC	E2E-X15B1T30-M1
E2A-M30LN30-M1-B1 OMC	E2E-X30MB1TL30-M1
E2A-M12KS04-M1-B2 OMC	E2E-X4B212-M1

Product discontinuation	Recommended replacement
E2A-M12KN08-M1-B2 OMC	E2E-X8MB212-M1
E2A-M18KS08-M1-B2 OMC	E2E-X8B218-M1
E2A-M18KN16-M1-B2 OMC	E2E-X16MB218-M1
E2A-M30KS15-M1-B2 OMC	E2E-X15B230-M1
E2A-M30LN30-M1-B2 OMC	E2E-X30MB2L30-M1
E2A-M12KS04-M1-C1 OMC	E2E-X4C112-M1
E2A-M12KN08-M1-C1 OMC	E2E-X8MC112-M1
E2A-M18KS08-M1-C1 OMC	E2E-X8C118-M1
E2A-M18KN16-M1-C1 OMC	E2E-X16MC118-M1
E2A-M30KS15-M1-C1 OMC	E2E-X15C130-M1
E2A-M30LN30-M1-C1 OMC	E2E-X30MC1L30-M1
E2A-M12KS04-M1-C2 OMC	E2E-X4C212-M1
E2A-M18KS08-M1-C2 OMC	E2E-X8C218-M1
E2A-M12KN08-M1-C2 OMC	E2E-X8MC212-M1
E2A-M18KN16-M1-C2 OMC	E2E-X16MC218-M1
E2A-M30KS15-M1-C2 OMC	E2E-X15C230-M1
E2A-M30LN30-M1-C2 OMC	E2E-X30MC2L30-M1
E2A-M12LN08-M1-B1 OMC	E2E-X8MB1TL12-M1
E2A-M12LN08-M1-B2 OMC	E2E-X8MB2L12-M1
E2A-M12LN08-M1-C1 OMC	E2E-X8MC1L12-M1
E2A-M12LN08-M1-C2 OMC	E2E-X8MC2L12-M1
E2A-M12LN08-WP-B1 2M OMC	E2E-X8MB1TL12 2M
E2A-M12LN08-WP-B1 5M OMC	E2E-X8MB1TL12 5M
E2A-M12LN08-WP-B2 2M OMC	E2E-X8MB2L12 2M
E2A-M12LN08-WP-B2 5M OMC	E2E-X8MB2L12 5M
E2A-M12LN08-WP-C1 2M OMC	E2E-X8MC1L12 2M
E2A-M12LN08-WP-C1 5M OMC	E2E-X8MC1L12 5M
E2A-M12LN08-WP-C2 2M OMC	E2E-X8MC2L12 2M
E2A-M12LN08-WP-C2 5M OMC	E2E-X8MC2L12 5M
E2A-M12LS04-M1-B1 OMC	E2E-X4B1TL12-M1
E2A-M12LS04-M1-B2 OMC	E2E-X4B2L12-M1
E2A-M12LS04-M1-C1 OMC	E2E-X4C1L12-M1
E2A-M12LS04-M1-C2 OMC	E2E-X4C2L12-M1
E2A-M12LS04-WP-B1 2M OMC	E2E-X4B1TL12 2M
E2A-M12LS04-WP-B1 5M OMC	E2E-X4B1TL12 5M
E2A-M12LS04-WP-B2 2M OMC	E2E-X4B2L12 2M
E2A-M12LS04-WP-B2 5M OMC	E2E-X4B2L12 5M
E2A-M12LS04-WP-C1 2M OMC	E2E-X4C1L12 2M
E2A-M12LS04-WP-C1 5M OMC	E2E-X4C1L12 5M
E2A-M12LS04-WP-C2 2M OMC	E2E-X4C2L12 2M
E2A-M12LS04-WP-C2 5M OMC	E2E-X4C2L12 5M
E2A-M18LN16-M1-B1 OMC	E2E-X16MB1TL18-M1
E2A-M18LN16-M1-B2 OMC	E2E-X16MB2L18-M1
E2A-M18LN16-M1-C1 OMC	E2E-X16MC1L18-M1
E2A-M18LN16-M1-C2 OMC	E2E-X16MC2L18-M1
E2A-M18LN16-WP-B1 2M OMC	E2E-X16MB1TL18 2M
E2A-M18LN16-WP-B1 5M OMC	E2E-X16MB1TL18 5M
E2A-M18LN16-WP-B2 2M OMC	E2E-X16MB2L18 2M

Product discontinuation	Recommended replacement
E2A-M18LN16-WP-B2 5M OMC	E2E-X16MB2L18 5M
E2A-M18LN16-WP-C1 2M OMC	E2E-X16MC1L18 2M
E2A-M18LN16-WP-C1 5M OMC	E2E-X16MC1L18 5M
E2A-M18LN16-WP-C2 2M OMC	E2E-X16MC2L18 2M
E2A-M18LN16-WP-C2 5M OMC	E2E-X16MC2L18 5M
E2A-M18LS08-M1-B1 OMC	E2E-X8B1TL18-M1
E2A-M18LS08-M1-B2 OMC	E2E-X8B2L18-M1
E2A-M18LS08-M1-C1 OMC	E2E-X8C1L18-M1
E2A-M18LS08-M1-C2 OMC	E2E-X8C2L18-M1
E2A-M18LS08-WP-B1 2M OMC	E2E-X8B1TL18 2M
E2A-M18LS08-WP-B1 5M OMC	E2E-X8B1TL18 5M
E2A-M18LS08-WP-B2 2M OMC	E2E-X8B2L18 2M
E2A-M18LS08-WP-B2 5M OMC	E2E-X8B2L18 5M
E2A-M18LS08-WP-C1 2M OMC	E2E-X8C1L18 2M
E2A-M18LS08-WP-C1 5M OMC	E2E-X8C1L18 5M
E2A-M18LS08-WP-C2 2M OMC	E2E-X8C2L18 2M
E2A-M18LS08-WP-C2 5M OMC	E2E-X8C2L18 5M
E2A-M30LS15-M1-B1 OMC	E2E-X15B1TL30-M1
E2A-M30LS15-M1-B2 OMC	E2E-X15B2L30-M1
E2A-M30LS15-M1-C1 OMC	E2E-X15C1L30-M1
E2A-M30LS15-M1-C2 OMC	E2E-X15C2L30-M1
E2A-M30LS15-WP-B1 2M OMC	E2E-X15B1TL30 2M
E2A-M30LS15-WP-B1 5M OMC	E2E-X15B1TL30 5M
E2A-M30LS15-WP-B2 2M OMC	E2E-X15B2L30 2M
E2A-M30LS15-WP-B2 5M OMC	E2E-X15B2L30 5M
E2A-M30LS15-WP-C1 2M OMC	E2E-X15C1L30 2M
E2A-M30LS15-WP-C1 5M OMC	E2E-X15C1L30 5M
E2A-M30LS15-WP-C2 2M OMC	E2E-X15C2L30 2M
E2A-M30LS15-WP-C2 5M OMC	E2E-X15C2L30 5M
E2A-M08KN04-M1-B1 OMC	E2E-X4MB1T8-M1
E2A-M08KS02-M1-C1 OMC	E2E-X2C18-M1
E2A-M08LN04-M1-C1 OMC	E2E-X4MC1L8-M1
E2A-M08LS02-M1-B2 OMC	E2E-X2B2L8-M1
E2A-S08KN04-M1-C1 OMC	E2E-X4MC18-M1
E2A-S08KN04-M5-B1 OMC	E2E-X4MB1T8-M5
E2A-S08KN04-WP-B1 2M OMC	E2E-X4MB1T8 2M
E2A-S08KS02-M1-B1 OMC	E2E-X2B1T8-M1
E2A-S08KS02-M5-C1 OMC	E2E-X2C18-M5
E2A-S08KS02-WP-C1 2M OMC	E2E-X2C18 2M
E2A-S08LN04-M1-B1 OMC	E2E-X4MB1TL8-M1
E2A-S08LN04-M5-C1 OMC	E2E-X4MC1L8-M5
E2A-S08LN04-WP-C1 2M OMC	E2E-X4MC1L8 2M
E2A-S08LS02-M1-C1 OMC	E2E-X2C1L8-M1
E2A-S08LS02-M5-B1 OMC	E2E-X2B1TL8-M5
E2A-S08LS02-WP-B1 2M OMC	E2E-X2B1TL8 2M
E2A-M08KN04-M1-B2 OMC	E2E-X4MB28-M1
E2A-M08KN04-M1-C1 OMC	E2E-X4MC18-M1
E2A-M08KN04-M1-C2 OMC	E2E-X4MC28-M1

Product discontinuation	Recommended replacement
E2A-M08KS02-M1-B1 OMC	E2E-X2B1T8-M1
E2A-M08KS02-M1-B2 OMC	E2E-X2B28-M1
E2A-M08KS02-M1-C2 OMC	E2E-X2C28-M1
E2A-M08LN04-M1-B1 OMC	E2E-X4MB1TL8-M1
E2A-M08LN04-M1-B2 OMC	E2E-X4MB2L8-M1
E2A-M08LN04-M1-C2 OMC	E2E-X4MC2L8-M1
E2A-M08LS02-M1-B1 OMC	E2E-X2B1TL8-M1
E2A-M08LS02-M1-C1 OMC	E2E-X2C1L8-M1
E2A-M08LS02-M1-C2 OMC	E2E-X2C2L8-M1
E2A-S08KN04-M1-B1 OMC	E2E-X4MB1T8-M1
E2A-S08KN04-M1-B2 OMC	E2E-X4MB28-M1
E2A-S08KN04-M1-C2 OMC	E2E-X4MC28-M1
E2A-S08KN04-M5-B2 OMC	E2E-X4MB28-M5
E2A-S08KN04-M5-C1 OMC	E2E-X4MC18-M5
E2A-S08KN04-M5-C2 OMC	E2E-X4MC28-M5
E2A-S08KN04-WP-B1 5M OMC	E2E-X4MB1T8 5M
E2A-S08KN04-WP-B2 2M OMC	E2E-X4MB28 2M
E2A-S08KN04-WP-B2 5M OMC	E2E-X4MB28 5M
E2A-S08KN04-WP-C1 2M OMC	E2E-X4MC18 2M
E2A-S08KN04-WP-C1 5M OMC	E2E-X4MC18 5M
E2A-S08KN04-WP-C2 2M OMC	E2E-X4MC28 2M
E2A-S08KN04-WP-C2 5M OMC	E2E-X4MC28 5M
E2A-S08KS02-M1-B2 OMC	E2E-X2B28-M1
E2A-S08KS02-M1-C1 OMC	E2E-X2C18-M1
E2A-S08KS02-M1-C2 OMC	E2E-X2C28-M1
E2A-S08KS02-M5-B1 OMC	E2E-X2B1T8-M5
E2A-S08KS02-M5-B2 OMC	E2E-X2B28-M5
E2A-S08KS02-M5-C2 OMC	E2E-X2C28-M5
E2A-S08KS02-WP-B1 2M OMC	E2E-X2B1T8 2M
E2A-S08KS02-WP-B1 5M OMC	E2E-X2B1T8 5M
E2A-S08KS02-WP-B2 2M OMC	E2E-X2B28 2M
E2A-S08KS02-WP-B2 5M OMC	E2E-X2B28 5M
E2A-S08KS02-WP-C1 5M OMC	E2E-X2C18 5M
E2A-S08KS02-WP-C2 2M OMC	E2E-X2C28 2M
E2A-S08KS02-WP-C2 5M OMC	E2E-X2C28 5M
E2A-S08LN04-M1-B2 OMC	E2E-X4MB2L8-M1
E2A-S08LN04-M1-C1 OMC	E2E-X4MC1L8-M1
E2A-S08LN04-M1-C2 OMC	E2E-X4MC2L8-M1
E2A-S08LN04-M5-B1 OMC	E2E-X4MB1TL8-M5
E2A-S08LN04-M5-B2 OMC	E2E-X4MB2L8-M5
E2A-S08LN04-M5-C2 OMC	E2E-X4MC2L8-M5
E2A-S08LN04-WP-B1 2M OMC	E2E-X4MB1TL8 2M
E2A-S08LN04-WP-B1 5M OMC	E2E-X4MB1TL8 5M
E2A-S08LN04-WP-B2 2M OMC	E2E-X4MB2L8 2M
E2A-S08LN04-WP-B2 5M OMC	E2E-X4MB2L8 5M
E2A-S08LN04-WP-C1 5M OMC	E2E-X4MC1L8 5M
E2A-S08LN04-WP-C2 2M OMC	E2E-X4MC2L8 2M
E2A-S08LN04-WP-C2 5M OMC	E2E-X4MC2L8 5M

Product discontinuation	Recommended replacement
E2A-S08LS02-M1-B1 OMC	E2E-X2B1TL8-M1
E2A-S08LS02-M1-B2 OMC	E2E-X2B2L8-M1
E2A-S08LS02-M1-C2 OMC	E2E-X2C2L8-M1
E2A-S08LS02-M5-B2 OMC	E2E-X2B2L8-M5
E2A-S08LS02-M5-C1 OMC	E2E-X2C1L8-M5
E2A-S08LS02-M5-C2 OMC	E2E-X2C2L8-M5
E2A-S08LS02-WP-B1 5M OMC	E2E-X2B1TL8 5M
E2A-S08LS02-WP-B2 2M OMC	E2E-X2B2L8 2M
E2A-S08LS02-WP-B2 5M OMC	E2E-X2B2L8 5M
E2A-S08LS02-WP-C1 2M OMC	E2E-X2C1L8 2M
E2A-S08LS02-WP-C1 5M OMC	E2E-X2C1L8 5M
E2A-S08LS02-WP-C2 2M OMC	E2E-X2C2L8 2M
E2A-S08LS02-WP-C2 5M OMC	E2E-X2C2L8 5M
E2A-M12KN05-WP-B1 5M OMC	E2E-X5MB1T12 5M
E2A-M12LN05-WP-B1 5M OMC	E2E-X5MB1TL12 5M
E2A-S08KS01-WP-B1 5M OMC	E2E-X1R5B1T8 5M
E2A-M12KN05-M1-B1 OMS	E2E-X5MB1T12-M1
E2A-M12KN05-WP-B1 2M OMS	E2E-X5MB1T12 2M
E2A-M12KS02-M1-B1 OMS	E2E-X2B1T12-M1
E2A-M12KS02-WP-B1 2M OMS	E2E-X2B1T12 2M
E2A-M18KN10-M1-B1 OMS	E2E-X10MB1T18-M1
E2A-M18KN10-WP-B1 5M OMS	E2E-X10MB1T18 5M
E2A-M18KS05-WP-B1 2M OMS	E2E-X5B1T18 2M
E2A-M12KS02-WP-B1 5M OMS	E2E-X2B1T12 5M
E2A-M12KS02-WP-C1 5M OMS	E2E-X2C112 5M
E2A-M12LS02-WP-B1 5M OMS	E2E-X2B1TL12 5M
E2A-S08KS01-M3-B1 OMS	E2E-X1R5B1T8-M3
E2A-M30LS15-WP-B3 5M OMS	E2E-X15B3DL30 5M
E2A-M18KS08-M1-B3 OMS	E2E-X8B3D18-M1
E2A-S08KS02-M3-B1 OMS	E2E-X2B1T8-M3
E2A-M18KS08-WP-B3 OMS	E2E-X8B3D18 2M
E2A-M12LN05-M1-B1 OMS	E2E-X5MB1TL12-M1
E2A-M12LS02-M1-B1 OMS	E2E-X2B1TL12-M1
E2A-M12LS04-WS-B1 2M OMS	E2E-X4B1TL12 2M
E2A-M12KS02-WP-C1 2M OMS	E2E-X2C112 2M
E2A-M18KS05-M1-B1 OMS	E2E-X5B1T18-M1
E2A-M18LS05-M1-B1 OMS	E2E-X5B1TL18-M1
E2A-S08KS01-M1-B1 OMS	E2E-X1R5B1T8-M1
E2A-S08KS02-M3-B2 OMS	E2E-X2B28-M3
E2A-S08LS02-M3-B1 OMS	E2E-X2B1TL8-M3
E2A-M12LS04-M1-B3 OMS	E2E-X4B3DL12-M1
E2A-M18KN16-M1-B3 OMS	E2E-X16MB3D18-M1
E2A-M18LS08-M1-B3 OMS	E2E-X8B3DL18-M1
E2A-M30KS15-M1-B3 OMS	E2E-X15B3D30-M1
E2A-M30LS15-M1-B3 OMS	E2E-X15B3DL30-M1
E2A-M18KS08-WS-B1 5M	E2E-X8B1T18 5M
E2A-S08KS01-WP-B1 2M	E2E-X1R5B1T8 2M
E2A-M12KS04-WA-B1 5M	E2E-X4B1T12 5M







Product discontinuation	Recommended replacement
E2A-M30KS10-M1-B1	E2E-X10B1T30-M1
E2A-M18KS05-M1-C1	E2E-X5C118-M1
E2A-M12KS02-M1-B2	E2E-X2B212-M1
E2A-M18KS05-WP-C1 2M	E2E-X5C118 2M
E2A-M30KS15-WS-C1 2M	E2E-X15C130 2M
E2A-S08KS02-M3-C1	E2E-X2C18-M3
E2A-S08KS02-M3-C2	E2E-X2C28-M3
E2A-S08KN02-M1-B1	E2E-X2MB1T8-M1
E2A-S08KN04-M3-B1	E2E-X4MB1T8-M3
E2A-S08LN04-M3-B1	E2E-X4MB1TL8-M3
E2A-S08KN04-M3-B2	E2E-X4MB28-M3
E2A-S08KN04-M3-C1	E2E-X4MC18-M3
E2A-S08KN02-WP-B1 2M	E2E-X2MB1T8 2M
E2A-S08KS01-WP-B2 2M	E2E-X1R5B28 2M
E2A-S08KS01-WP-C1 2M	E2E-X1R5C18 2M
E2A-S08KS01-M1-B2	E2E-X1R5B28-M1
E2A-S08LS01-M5-B1	E2E-X1R5B1TL8-M5
E2A-S08KS01-M5-B1	E2E-X1R5B1T8-M5
E2A-M12KN08-WR-B1 2M	E2E-X8MB1T12 2M
E2A-M30KS10-WP-B1 2M	E2E-X10B1T30 2M
E2A-M12KN05-WP-C1 2M	E2E-X5MC112 2M
E2A-S08KN04-M3-C2	E2E-X4MC28-M3
E2A-S08KN02-WP-B2 2M	E2E-X2MB28 2M
E2A-S08KN02-WP-C2 2M	E2E-X2MC28 2M
E2A-S08KS01-WP-C2 2M	E2E-X1R5C28 2M
E2A-S08KS01-M1-C1	E2E-X1R5C18-M1
E2A-S08LS01-WP-B1 2M	E2E-X1R5B1TL8 2M
E2A-S08LS01-M1-B1	E2E-X1R5B1TL8-M1
E2A-S08KS01-M5-C1	E2E-X1R5C18-M5
E2A-S08LS01-M5-C1	E2E-X1R5C1L8-M5
E2A-S08LS01-M3-B1	E2E-X1R5B1TL8-M3
E2A-S08LS01-WP-B1 5M	E2E-X1R5B1TL8 5M
E2A-S08KS01-WP-C1 5M	E2E-X1R5C18 5M
E2A-S08KN02-M1-C1	E2E-X2MC18-M1
E2A-M12KS04-WP-B3 2M	E2E-X4B3D12 2M
E2A-M12KN08-WP-B3 2M	E2E-X8MB3D12 2M
E2A-M12LN08-M1-B3	E2E-X8MB3DL12-M1
E2A-M12KN08-M1-B3	E2E-X8MB3D12-M1
E2A-M18LN16-M1-B3	E2E-X16MB3DL18-M1
E2A-M30LS15-WP-B3 2M	E2E-X15B3DL30 2M
E2A-M30LN30-M1-B3	E2E-X30MB3DL30-M1
E2A-M18KS08-WP-B3 5M	E2E-X8B3D18 5M
E2A-M12LS04-WP-B3 5M	E2E-X4B3DL12 5M
E2A-M12KN05-M1-B3	E2E-X5MB3D12-M1
E2A-M12LS04-WP-B3 2M	E2E-X4B3DL12 2M
E2A-M12LN08-WP-B3 2M	E2E-X8MB3DL12 2M
E2A-M18LS08-WP-B3 2M	E2E-X8B3DL18 2M
E2A-M18LN16-WP-B3 2M	E2E-X16MB3DL18 2M









Product discontinuation	Recommended replacement
E2A-M18KN16-WP-B3 2M	E2E-X16MB3D18 2M
E2A-M30KS15-WP-B3 2M	E2E-X15B3D30 2M
E2A-M30LN30-WP-B3 2M	E2E-X30MB3DL30 2M
E2A-M12LS04-WP-C3 2M	E2E-X4C3L12 2M
E2A-M12KS04-WP-C3 2M	E2E-X4C312 2M
E2A-M12LS04-M1-C3	E2E-X4C3L12-M1
E2A-M12KS04-M1-C3	E2E-X4C312-M1
E2A-M12LN08-WP-C3 2M	E2E-X8MC3L12 2M
E2A-M12KN08-WP-C3 2M	E2E-X8MC312 2M
E2A-M12LN08-M1-C3	E2E-X8MC3L12-M1
E2A-M12KN08-M1-C3	E2E-X8MC312-M1
E2A-M18LS08-WP-C3 2M	E2E-X8C3L18 2M
E2A-M18KS08-WP-C3 2M	E2E-X8C318 2M
E2A-M18LS08-M1-C3	E2E-X8C3L18-M1
E2A-M18KS08-M1-C3	E2E-X8C318-M1
E2A-M18LN16-WP-C3 2M	E2E-X16MC3L18 2M
E2A-M18KN16-WP-C3 2M	E2E-X16MC318 2M
E2A-M18LN16-M1-C3	E2E-X16MC3L18-M1
E2A-M18KN16-M1-C3	E2E-X16MC318-M1
E2A-M30LS15-WP-C3 2M	E2E-X15C3L30 2M
E2A-M30KS15-WP-C3 2M	E2E-X15C330 2M
E2A-M30LS15-M1-C3	E2E-X15C3L30-M1
E2A-M30KS15-M1-C3	E2E-X15C330-M1
E2A-M30LN30-WP-C3 2M	E2E-X30MC3L30 2M
E2A-M30LN30-M1-C3	E2E-X30MC3L30-M1
E2A-M12KS02-M1-B3	E2E-X2B3D12-M1
E2A-M12LS02-M1-C3	E2E-X2C3L12-M1
E2A-M12KS04-WP-B3 5M	E2E-X4B3D12 5M
E2A-M12KN08-WP-B3 5M	E2E-X8MB3D12 5M
E2A-M12KN05-WP-C3 2M	E2E-X5MC312 2M
E2A-M18LS08-WA-B1 5M	E2E-X8B1TL18 5M
E2A-M12KS04-M1TJ-B3 0.3M	E2E-X4B3D12-M1TJ 0.3M
E2A-M18KS08-M1TJ-B3 0.3M	E2E-X8B3D18-M1TJ 0.3M
E2A-M30KS15-M1TJ-B3 0.3M	E2E-X15B3D30-M1TJ 0.3M






[Body color]

Product discontinuation Model E2A series	Recommendable replacement Model E2E-Next series
Metal threaded body with gray color cable	Metal threaded body with black color cable

[Wire connection]

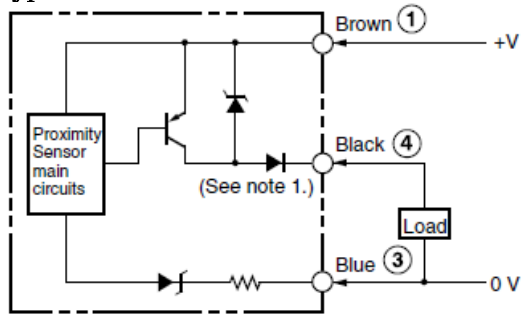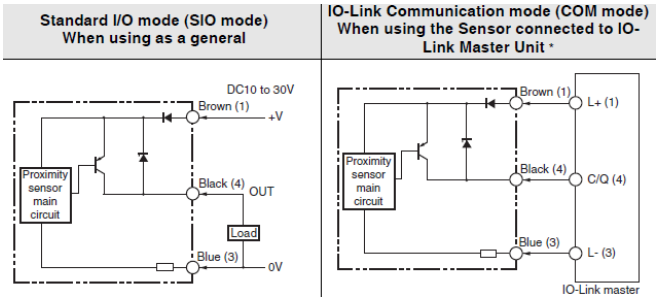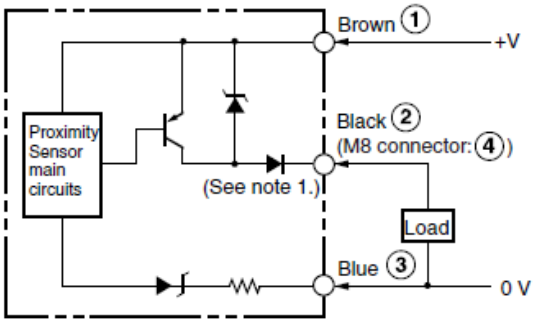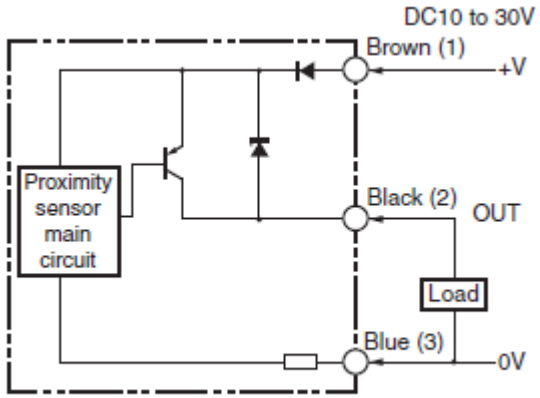Product discontinuation Model E2A series	Recommendable replacement Model E2E-next Series
NO(Normal Open) type PNP Type: E2A-***-B1  **Note 1:** With M8 connector models, there is no output reverse polarity protection diode. M12 Connector Pin Arrangement (See note 2.) M8 connector (3 pin) Pin Arrangement M8 Connector (4 pin) Pin Arrangement (See note 2.)  **Note 2:** Pin 2 of the M12 connector and M8 connector is not used.	**Type: E2E-**-B1**  Its pin assignment of connector type is as same as E2A.
NC (Normal Close) type PNP **Type: E2A-***-B2**  **Note 1:** With M8 connector models, there is no output reverse polarity protection diode. M12 Connector Pin Arrangement (See note 2.) M8 connector (3 pin) Pin Arrangement M8 Connector (4 pin) Pin Arrangement (See note 2.)  **Note 2:** Pin 4 of the M12 connector and M8 connector is not used.	**Type: E2E-***-B2**  Note: M8 (3-pin) Connector: (1)(4)(3) Its pin assignment of connector type is as same as E2A.

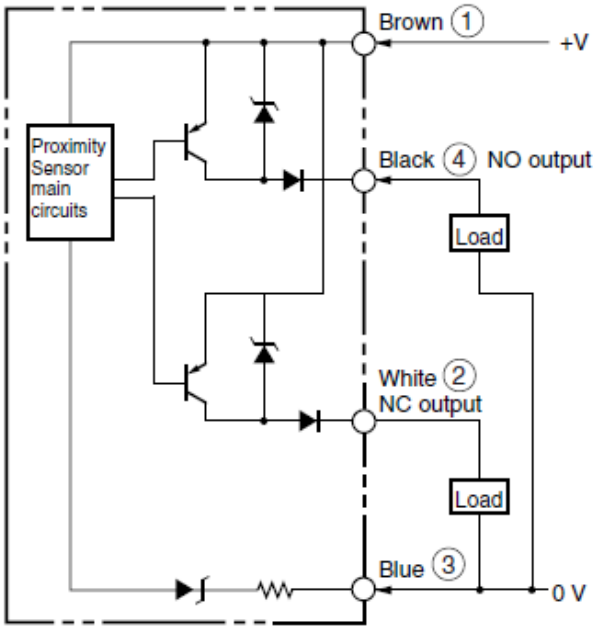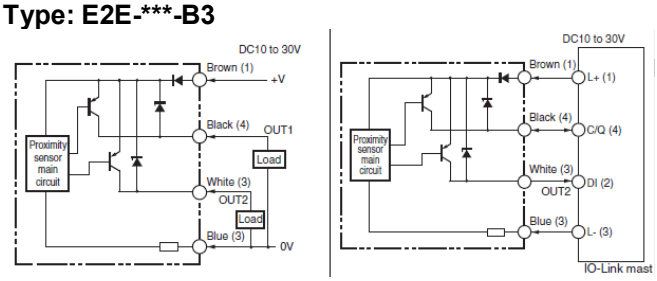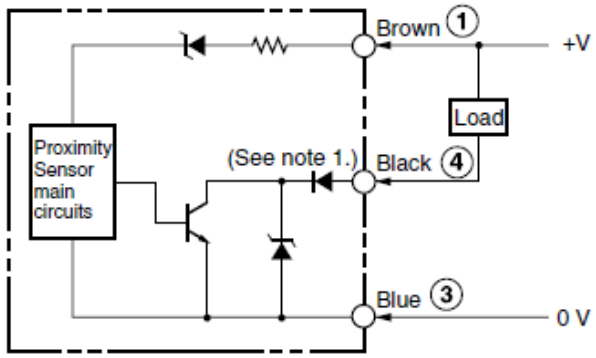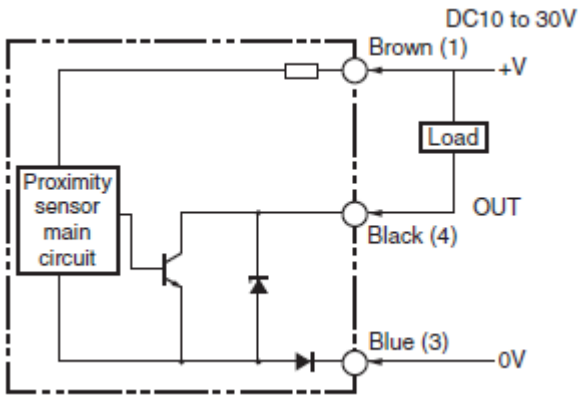
Product discontinuation Model E2A series	Recommendable replacement Model E2E-next Series
NO+NC Type of PNP **Type: E2A-***-B3**  M12 Connector Pin Arrangement  	**Type: E2E-***-B3**  Its pin assignment of connector type is as same as E2A.
NO(Normal Open) type NPN Type: E2A-***-C1  **Note 1:** With M8 connector models, there is no output reverse polarity protection diode. M12 Connector Pin Arrangement (See note 2.)  M8 connector (3 pin) Pin Arrangement  M8 Connector (4 pin) Pin Arrangement (See note 2.)  **Note 2:** Pin 2 of the M12 connector and M8 connector is not used.	**Type: E2E-***-C1**  Its pin assignment of connector type is as same as E2A.

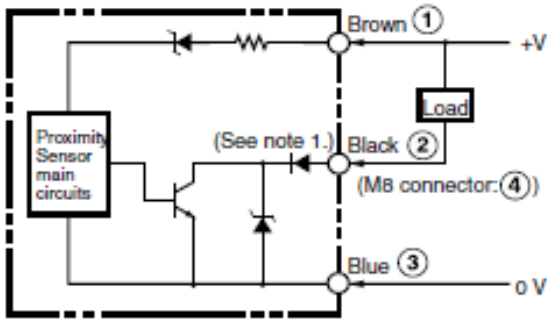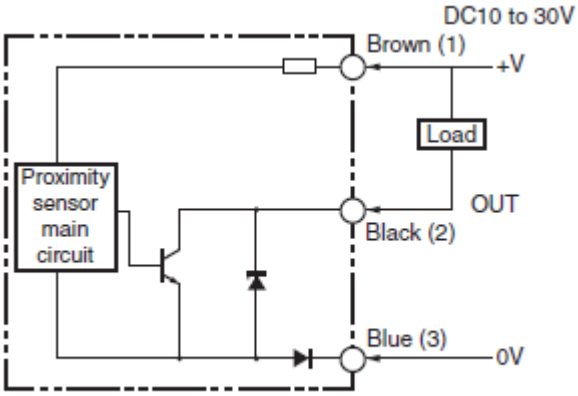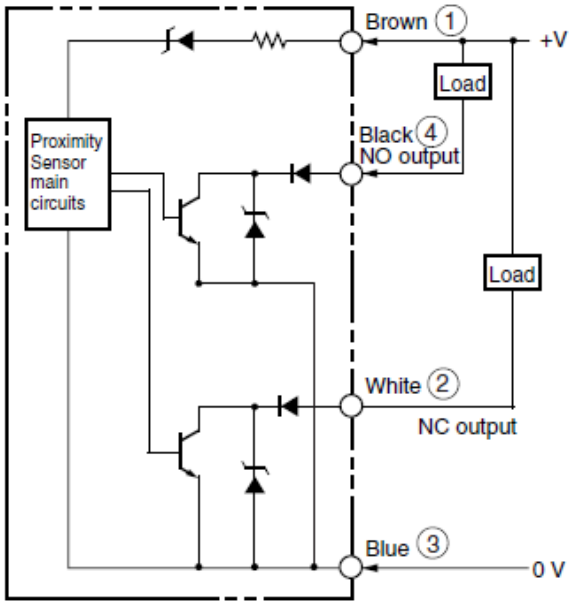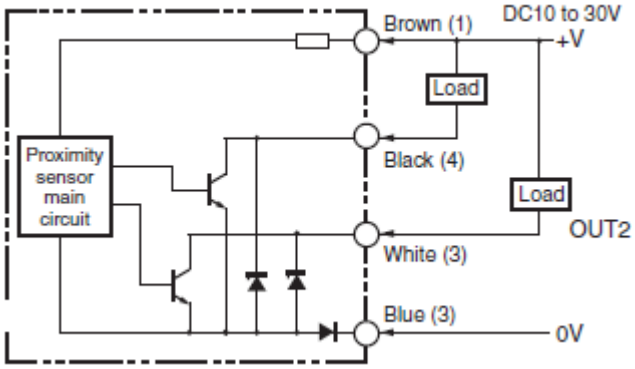Product discontinuation Model E2A series	Recommendable replacement Model E2E-next Series
NC (Normal Close) type NPN Type: E2A-***-C2  **Note 1:** With M8 Size Models, there is no output reverse polarity protection diode. M12 Connector Pin Arrangement (See note 2.)  M8 Connector (3-pin) Pin Arrangement  **Note 2:** Terminal 4 of the M12 connector is not used.	**Type: E2E-***-C2**  Note: M8 (3-pin) Connector: (1)(4)(3) Its pin assignment of connector type is as same as E2A.
NO+NC Type of PNP **Type: E2A-***- C3**  M12 Connector Pin Arrangement  	**Type: E2E-***-C3**  Its pin assignment of connector type is as same as E2A.


[Dimensions]

Product discontinuation Model E2A	Recommendable replacement Model E2E-Next series

M8 Pre-wired type (Shielded)
E2A-S08KS02-WP-**/ E2A-S08LS02-WP-**

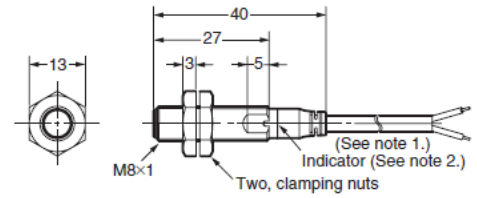


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

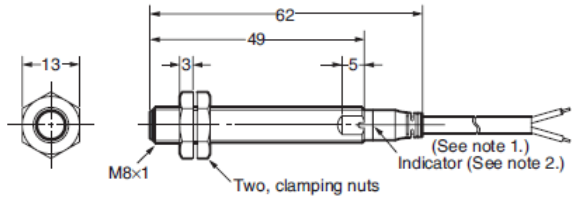


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

M12 Pre-wired type (Shielded)
E2A-M12KS04-WP-**/ E2A- S12KS04-WP-**
E2A-M12LS04-WP-**/ E2A- S12LS04-WP-**

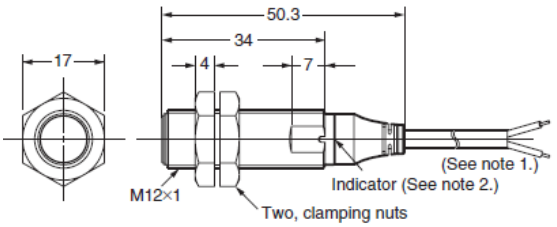


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)
3. for NO+NC (-B3 / -C3) models the total length is 4 mm longer

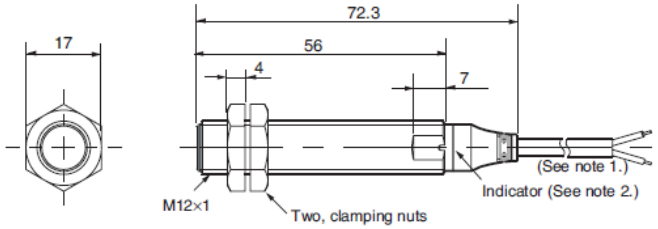


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

M18 Pre-wired type (Shielded)
E2A-M18KS08-WP-**/ E2A- S18KS08-WP-**
E2A-M18LS08-WP-**/ E2A- S18LS08-WP-**

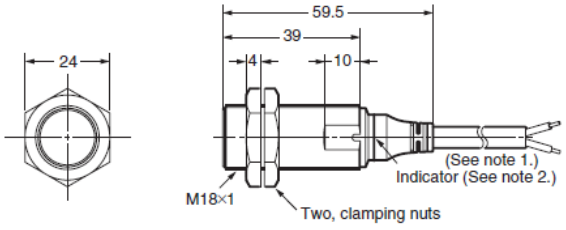

Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

Pre-wired Models of E2E-Next series (dimension table).

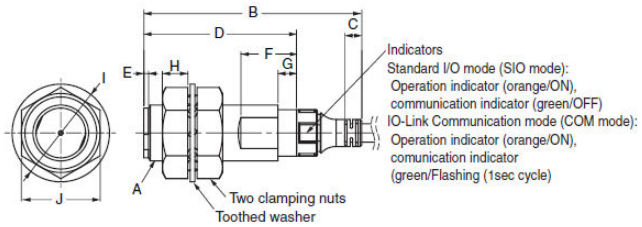

Pre-wired Models
(Operation mode: NO, NC Type)




Vinyl-insulated round cable with 3 conductors
M8, M12 size: 4-dia.
M18, M30 size: 6-dia.
(Conductor cross section: 0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 2 m

(Operation mode: NO+NC Type)



Vinyl-insulated round cable with 4 conductors
M12 size: 4.3-dia.
M18/M30 size: 6-dia.
(Conductor cross section: 0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 2 m

Pre-wired Connector Models (M1TJ)



(Operation mode: NO, NC Type)
Vinyl-insulated round cable with 3 conductors
M8, M12 size: 4-dia.
M18, M30 size: 6-dia.
(Conductor cross section: 0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 0.3 m

(Operation mode: NO+NC Type)
Vinyl-insulated round cable with 4 conductors
M12 size: 4.3-dia.
M18, M30 size: 6-dia.
(Conductor cross section: 0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 0.3 m

Shielded

Model	A	B	C	D	E	F *1	G *2	H	I	J
E2E(Q)-X□8	M8XP1	37.8	4.4	26	---	10 (8)	4	3	15	13
E2E(Q)-X□12	M12XP1	47.1	3.7	33	---	12 (10)	4	4	21	17
E2E(Q)-X□18	M18XP1	55.3	8.5	38	---	12 (10)	4	4	29	24
E2E(Q)-X□30	M30XP1.5	60.3	8.3	43	---	12 (10)	4	5	42	36
E2E-X□L8	M8XP1	47.8	4.4	36	---	8	---	3	15	13
E2E-X□L12	M12XP1	69.1	3.7	55	---	10	---	4	21	17
E2E-X□L18	M18XP1	77.3	8.5	60	---	10	---	4	29	24
E2E-X□L30	M30XP1.5	82.3	8.3	65	---	10	---	5	42	36

Unshielded


Model	A	B	C	D	E *3	F	G *2	H	I	J
E2E-X□M□8	M8XP1	37.8	4.4	26	6	8	---	3	15	13
E2E-X□M□12	M12XP1	47.1	3.7	33	7	10	---	4	21	17
E2E-X□M□18	M18XP1	55.3	8.5	38	10	10	---	4	29	24
E2E-X□M□30	M30XP1.5	60.3	8.3	43	13	10	---	5	42	36
E2E-X□M□L8	M8XP1	47.8	4.4	36	6	8	---	3	15	13
E2E-X□M□L12	M12XP1	69.1	3.7	55	7	10	---	4	21	17
E2E-X□M□L18	M18XP1	77.3	8.5	60	10	10	---	4	29	24
E2E-X□M□L30	M30XP1.5	82.3	8.3	65	130 (15)	10	---	5	42	36

Note1:E2E-Next series has one toothed washer.

Note2: E2E(Q) means E2EQ series and E2EQ series is for welding process type and has the threaded body and sensing head covered with the fluorine resin for spatter resistance.


Note.3:
Fixing Nut set is as same as E2A series.

Product discontinuation Model E2A	Recommendable replacement Model E2E-Next series

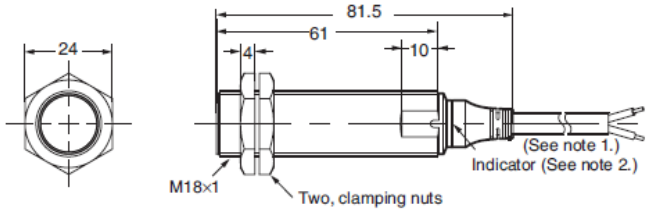


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

M30 Pre-wired type (Shielded)
E2A-M30KS15-WP-**/ E2A- S30KS15-WP-**
E2A-M30LS15-WP-**/ E2A- S30LS15-WP-**

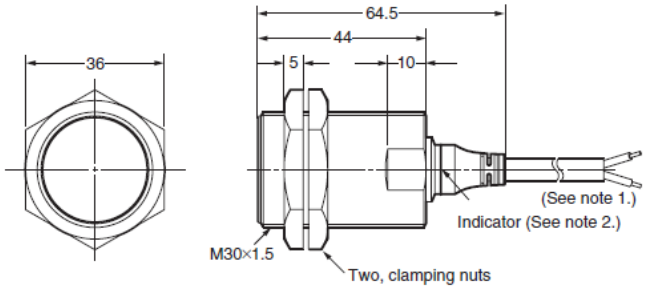


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

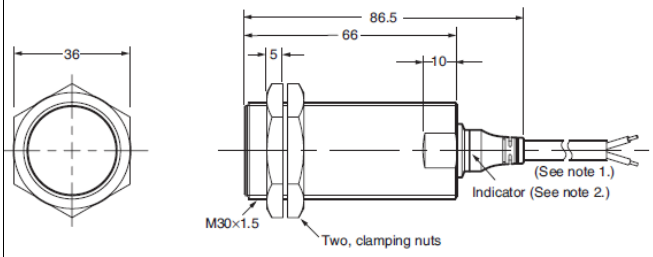


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)


M8 Pre-wired type (Non-shielded)
E2A-S08KN04-WP-**/ E2A-S08LN04-WP-**

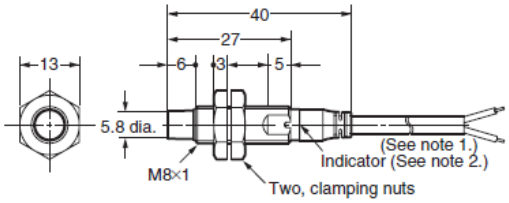


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

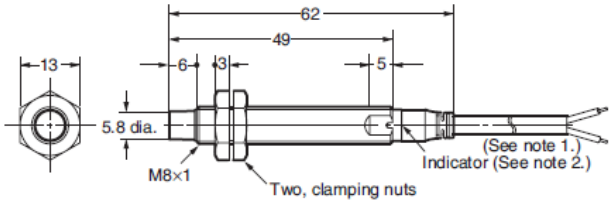

Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

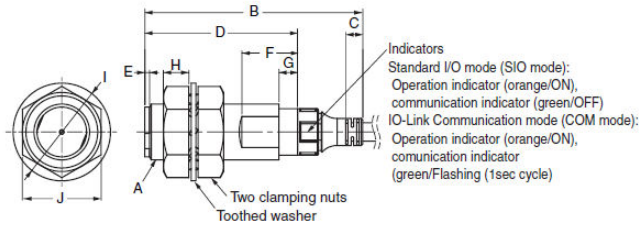

Pre-wired Models
(Operation mode: NO, NC Type)




Vinyl-insulated round cable with 3 conductors
M8, M12 size: 4-dia.
M18, M30 size: 6-dia.
(Conductor cross section: 0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 2 m

(Operation mode: NO+NC Type)



Vinyl-insulated round cable with 4 conductors
M12 size: 4.3-dia.
M18/M30 size: 6-dia.
(Conductor cross section: 0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 2 m

Pre-wired Connector Models (M1TJ)



(Operation mode: NO, NC Type)
Vinyl-insulated round cable with 3 conductors
M8, M12 size: 4-dia.
M18, M30 size: 6-dia.
(Conductor cross section: 0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 0.3 m

(Operation mode: NO+NC Type)
Vinyl-insulated round cable with 4 conductors
M12 size: 4.3-dia.
M18, M30 size: 6-dia.
(Conductor cross section: 0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 0.3 m

Shielded

Model	A	B	C	D	E	F *1	G *2	H	I	J
E2E(Q)-X□8	M8XP1	37.8	4.4	26	---	10 (8)	4	3	15	13
E2E(Q)-X□12	M12XP1	47.1	3.7	33	---	12 (10)	4	4	21	17
E2E(Q)-X□18	M18XP1	55.3	8.5	38	---	12 (10)	4	4	29	24
E2E(Q)-X□30	M30XP1.5	60.3	8.3	43	---	12 (10)	4	5	42	36
E2E-X□L8	M8XP1	47.8	4.4	36	---	8	---	3	15	13
E2E-X□L12	M12XP1	69.1	3.7	55	---	10	---	4	21	17
E2E-X□L18	M18XP1	77.3	8.5	60	---	10	---	4	29	24
E2E-X□L30	M30XP1.5	82.3	8.3	65	---	10	---	5	42	36

Unshielded

Model	A	B	C	D	E *3	F	G *2	H	I	J
E2E-X□M□8	M8XP1	37.8	4.4	26	6	8	---	3	15	13
E2E-X□M□12	M12XP1	47.1	3.7	33	7	10	---	4	21	17
E2E-X□M□18	M18XP1	55.3	8.5	38	10	10	---	4	29	24
E2E-X□M□30	M30XP1.5	60.3	8.3	43	13	10	---	5	42	36
E2E-X□M□L8	M8XP1	47.8	4.4	36	6	8	---	3	15	13
E2E-X□M□L12	M12XP1	69.1	3.7	55	7	10	---	4	21	17
E2E-X□M□L18	M18XP1	77.3	8.5	60	10	10	---	4	29	24
E2E-X□M□L30	M30XP1.5	82.3	8.3	65	130 (15)	10	---	5	42	36


Note1:E2E-Next series has one toothed washer.

Note2: E2E(Q) means E2EQ series and E2EQ series is for welding process type and has the threaded body and sensing head covered with the fluorine resin for spatter resistance.


Note.3:
Fixing Nut set is as same as E2A series.

Product discontinuation Model E2A	Recommendable replacement Model E2E-Next series

M12 Pre-wired type (Non-shielded)
E2A-M12KN08-WP-**/ E2A- S12KN08-WP-**
E2A-M12LN08-WP-**/ E2A- S12LN08-WP-**

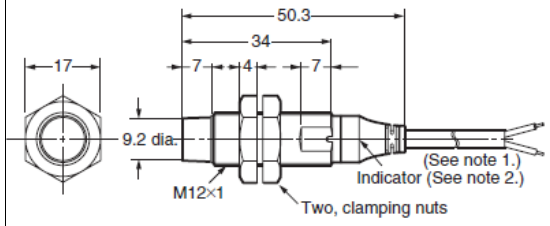


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)
3. for NO+NC (-B3 / -C3) models the total length is 4 mm longer

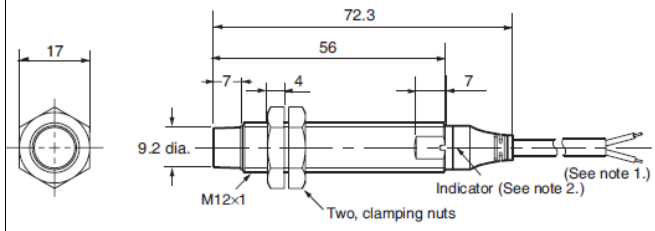


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)


M18 Pre-wired type (Non-shielded)
E2A-M18KN16-WP-**/ E2A- S18KN16-WP-**
E2A-M18LN16-WP-**/ E2A- S18LN16-WP-**

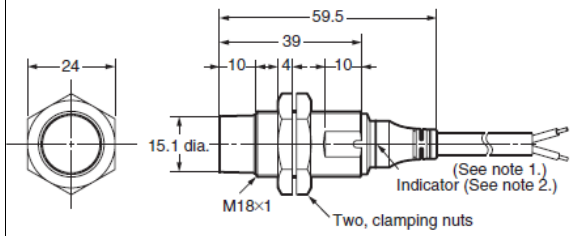


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

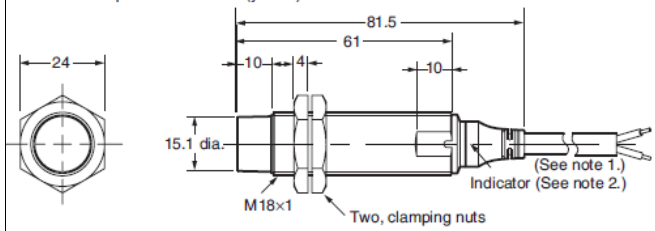

Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

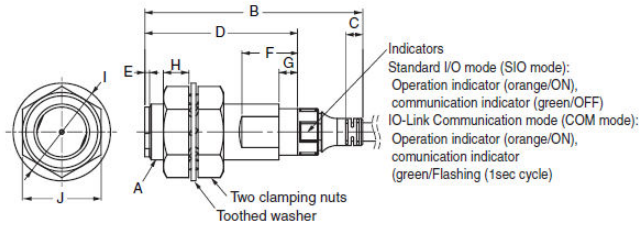

Pre-wired Models
(Operation mode: NO, NC Type)




Vinyl-insulated round cable with
3 conductors
M8, M12 size: 4-dia.
M18, M30 size: 6-dia.
(Conductor cross section:
0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 2 m

(Operation mode: NO+NC Type)



Vinyl-insulated round cable with
4 conductors
M12 size: 4.3-dia.
M18/M30 size: 6-dia.
(Conductor cross section: 0.2 mm²
(AWG24),
Insulator diameter: 1.05 mm),
Standard length: 2 m

Pre-wired Connector Models (M1TJ)



(Operation mode: NO, NC Type)
Vinyl-insulated round cable with
3 conductors
M8, M12 size: 4-dia.
M18, M30 size: 6-dia.
(Conductor cross section:
0.2 mm² (AWG24),
Insulator diameter: 1.05 mm),
Standard length: 0.3 m

(Operation mode: NO+NC Type)
Vinyl-insulated round cable with
4 conductors
M12 size: 4.3-dia.
M18, M30 size: 6-dia.
(Conductor cross section: 0.2 mm²
(AWG24),
Insulator diameter: 1.05 mm),
Standard length: 0.3 m

Shielded

Model	A	B	C	D	E	F *1	G *2	H	I	J
E2E(Q)-X□8	M8XP1	37.8	4.4	26	---	10 (8)	4	3	15	13
E2E(Q)-X□12	M12XP1	47.1	3.7	33	---	12 (10)	4	4	21	17
E2E(Q)-X□18	M18XP1	55.3	8.5	38	---	12 (10)	4	4	29	24
E2E(Q)-X□30	M30XP1.5	60.3	8.3	43	---	12 (10)	4	5	42	36
E2E-X□L8	M8XP1	47.8	4.4	36	---	8	---	3	15	13
E2E-X□L12	M12XP1	69.1	3.7	55	---	10	---	4	21	17
E2E-X□L18	M18XP1	77.3	8.5	60	---	10	---	4	29	24
E2E-X□L30	M30XP1.5	82.3	8.3	65	---	10	---	5	42	36






Unshielded

Model	A	B	C	D	E *3	F	G *2	H	I	J
E2E-X□M□8	M8XP1	37.8	4.4	26	6	8	---	3	15	13
E2E-X□M□12	M12XP1	47.1	3.7	33	7	10	---	4	21	17
E2E-X□M□18	M18XP1	55.3	8.5	38	10	10	---	4	29	24
E2E-X□M□30	M30XP1.5	60.3	8.3	43	13	10	---	5	42	36
E2E-X□M□L8	M8XP1	47.8	4.4	36	6	8	---	3	15	13
E2E-X□M□L12	M12XP1	69.1	3.7	55	7	10	---	4	21	17
E2E-X□M□L18	M18XP1	77.3	8.5	60	10	10	---	4	29	24
E2E-X□M□L30	M30XP1.5	82.3	8.3	65	130 (15)	10	---	5	42	36


Note1:E2E-Next series has one toothed washer.

Note2: E2E(Q) means E2EQ series and E2EQ series is for welding process type and has the threaded body and sensing head covered with the fluorine resin for spatter resistance.

Note.3:
Fixing Nut set is as same as E2A series.

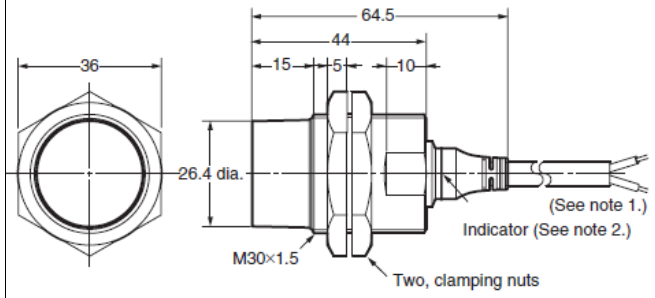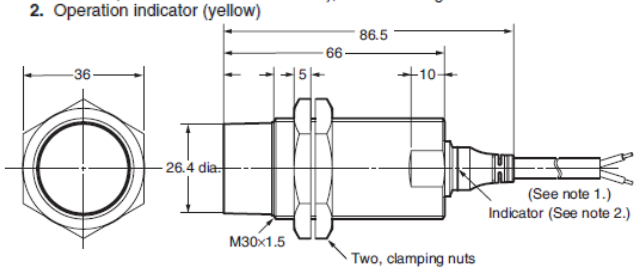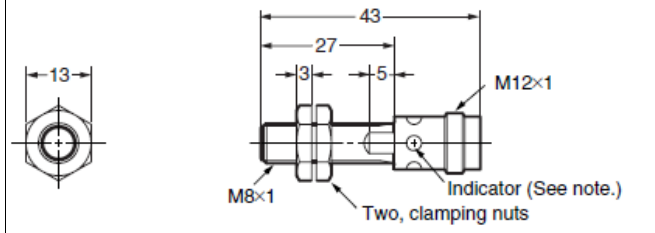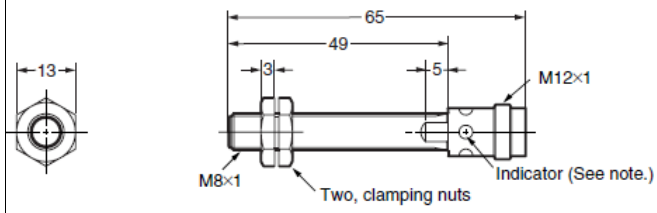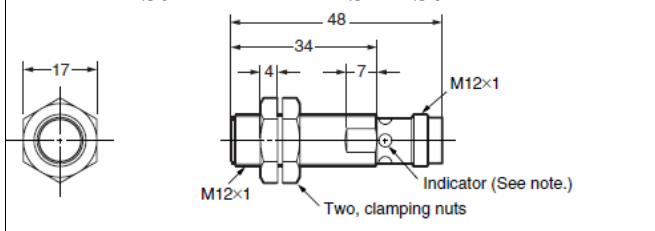
Product discontinuation Model E2A	Recommendable replacement Model E2E-Next series
M30 Pre-wired type (Non-shielded) E2A-M30KN20-WP-**/ E2A- S30KN20-WP-** E2A-M30LN30-WP-**/ E2A- S30LN30-WP-**  **Note 1.** 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m **2.** Operation indicator (yellow)  **Note 1.** 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m **2.** Operation indicator (yellow)	Please check the previous page.
M8 connector type with M12 size connector (Shielded) E2A-S08KS02-M1-**/ E2A-S08LS02-M1-**  **Note:** Operation indicator (yellow LED, 4×90°)  **Note:** Operation indicator (yellow LED, 4×90°)	The dimension table of connector models for E2E-Next series is on the next page
M12 connector type with M12 size connector (Shielded) E2A-M12KS04-M1-**/ E2A-S12KS04-M1-** E2A-M12LS04-M1-**/ E2A-S12LS04-M1-**  **Note 1:** Operation indicator (yellow LED, 4×90°) **Note 2:** for NO+NC (-B3 / -C3) models the total length is 4 mm longer	

Product discontinuation
Model E2A

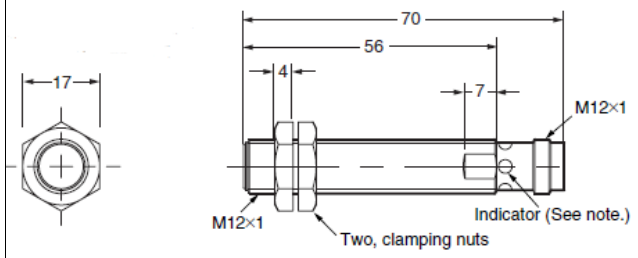


Note: Operation indicator (yellow LED, 4×90°)

M18 connector type with M12 size connector (Shielded)
E2A-M18KS08-M1-**/ E2A-S18KS08-M1-**
E2A-M18LS08-M1-**/ E2A-S18LS08-M1-**

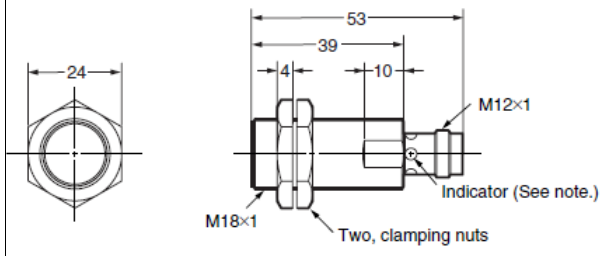


Note: Operation indicator (yellow LED, 4×90°)

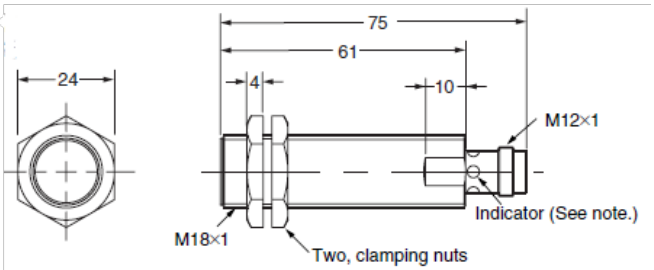


Note: Operation indicator (yellow LED, 4×90°)

M30 connector type with M12 size connector (Shielded)
E2A-M30KS15-M1-**/ E2A-S30KS15-M1-**
E2A-M30LS15-M1-**/E2A-S30LS15-M1-**

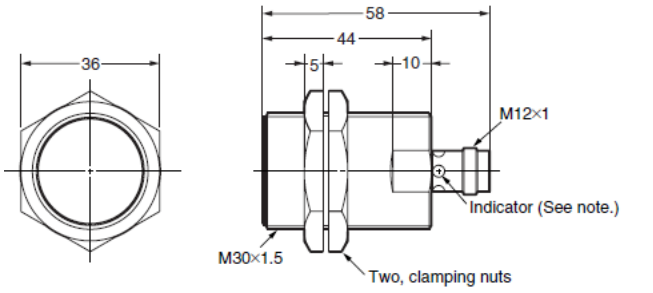


Note: Operation indicator (yellow LED, 4×90°)

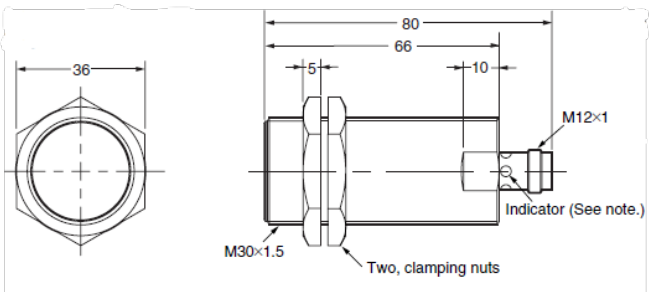

Note: Operation indicator (yellow LED, 4×90°)

Recommendable replacement
Model E2E-Next series

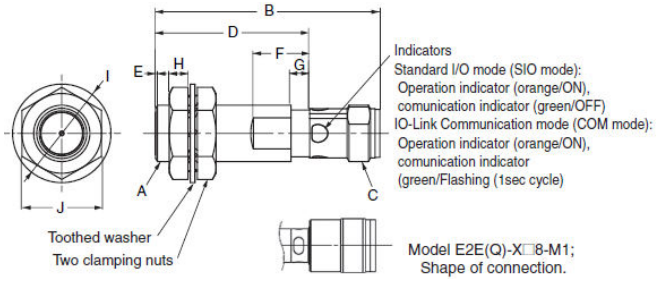

Shielded

Model	A	B	C	D	E	F *1	G *2	H	I	J
E2E(Q)-X□30 X□8-M3/M5	M8XP1	39	M8XP1	26	---	10 (8)	4	3	15	13
E2E(Q)-X□8-M1	M8XP1	43	M12XP1	26	---	10 (8)	4	3	15	13
E2E(Q)-X□12-M1	M12XP1	48	M12XP1	33	---	12 (10)	4	4	21	17
E2E(Q)-X□18-M1	M18XP1	53	M12XP1	38	---	12 (10)	4	4	29	24
E2E(Q)-X□30-M1	M30XP1.5	58	M12XP1	43	---	12 (10)	4	5	42	36
E2E-X□L8-M3/M5	M8XP1	49	M8XP1	36	---	8	---	3	15	13
E2E-X□L8-M1	M8XP1	53	M12XP1	36	---	8	---	3	15	13
E2E-X□L12-M1	M12XP1	70	M12XP1	55	---	10	---	4	21	17
E2E-X□L18-M1	M18XP1	75	M12XP1	60	---	10	---	4	29	24
E2E-X□L30-M1	M30XP1.5	80	M12XP1	65	---	10	---	5	42	36

Unshielded

Model	A	B	C	D	E *3	F	G *2	H	I	J
E2E-X□M□8-M3/M5	M8XP1	39	M8XP1	26	6	8	---	3	15	13
E2E-X□M□8-M1	M8XP1	43	M12XP1	26	6	8	---	3	15	13
E2E-X□M□12-M1	M12XP1	48	M12XP1	26	7	10	---	4	21	17
E2E-X□M□18-M1	M18XP1	53	M12XP1	38	10	10	---	4	29	24
E2E-X□M□30-M1	M30XP1.5	58	M12XP1	43	13	10	---	5	42	36
E2E-X□M□L8-M3-M5	M8XP1	49	M8XP1	36	6	8	---	3	15	13
E2E-X□M□L8-M1	M8XP1	53	M12XP1	36	6	8	---	3	15	13
E2E-X□M□L12-M1	M12XP1	70	M12XP1	55	7	10	---	4	21	17
E2EX□M□L18-M1	M18XP1	75	M12XP1	60	10	10	---	4	29	24
E2E-X□M□L30-M1	M30XP1.5	80	M12XP1	65	130 (15)	10	---	5	42	36


Note.1: E2E-Next series has one toothed washer.

Note.2: E2E(Q) means E2EQ series and E2EQ series is for welding process type and has the threaded body and sensing head covered with the fluorine resin for spatter resistance.


Note.3:
Fixing Nut set is as same as E2A series.

Product discontinuation Model E2A	Recommendable replacement Model E2E-Next series

M8 connector type with M12 size connector
(Non-shielded)
E2A-S08KN04-M1-**/ E2A-S08LN04-M1-**

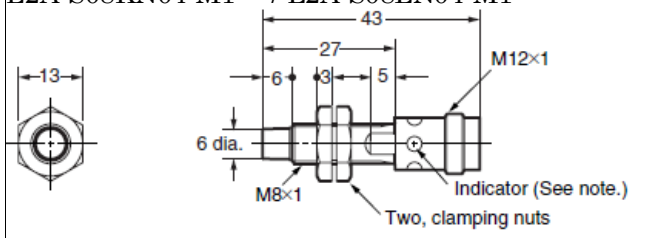


Note: Operation indicator (yellow LED, 4×90°)

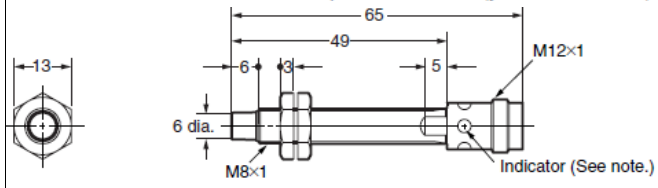


Note: Operation indicator (yellow LED, 4×90°)


M12 connector type with M12 size connector
(Non-shielded)
E2A-M12KN08-M1-**/ E2A-S12KN08-M1-**
E2A-M12LN08-M1-**/ E2A-S12LN08-M1-**

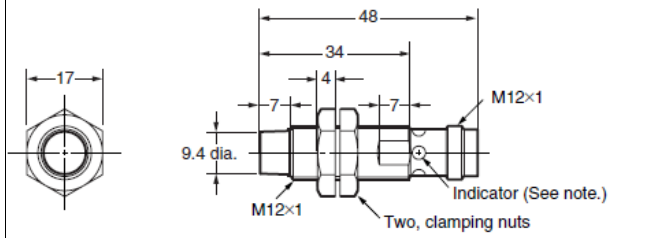

Note 1: Operation indicator (yellow LED, 4×90°)
Note 2: for NO+NC (-B3 / -C3) models the total length is 4 mm longer

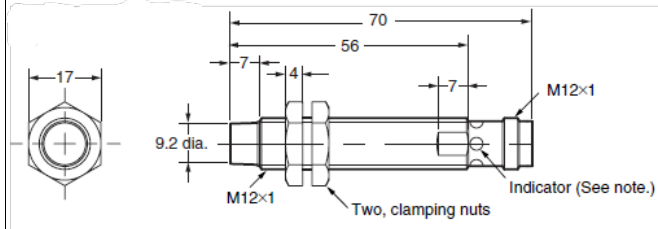

Note: Operation indicator (yellow LED, 4×90°)

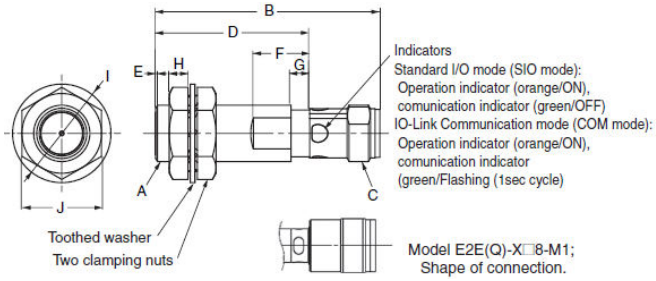

Shielded

Model	A	B	C	D	E	F *1	G *2	H	I	J
E2E(Q)-X□30 X□8-M3/M5	M8XP1	39	M8XP1	26	---	10 (8)	4	3	15	13
E2E(Q)-X□8-M1	M8XP1	43	M12XP1	26	---	10 (8)	4	3	15	13
E2E(Q)-X□12-M1	M12XP1	48	M12XP1	33	---	12 (10)	4	4	21	17
E2E(Q)-X□18-M1	M18XP1	53	M12XP1	38	---	12 (10)	4	4	29	24
E2E(Q)-X□30-M1	M30XP1.5	58	M12XP1	43	---	12 (10)	4	5	42	36
E2E-X□L8-M3/M5	M8XP1	49	M8XP1	36	---	8	---	3	15	13
E2E-X□L8-M1	M8XP1	53	M12XP1	36	---	8	---	3	15	13
E2E-X□L12-M1	M12XP1	70	M12XP1	55	---	10	---	4	21	17
E2E-X□L18-M1	M18XP1	75	M12XP1	60	---	10	---	4	29	24
E2E-X□L30-M1	M30XP1.5	80	M12XP1	65	---	10	---	5	42	36

Unshielded

Model	A	B	C	D	E *3	F	G *2	H	I	J
E2E-X□M□8-M3/M5	M8XP1	39	M8XP1	26	6	8	---	3	15	13
E2E-X□M□8-M1	M8XP1	43	M12XP1	26	6	8	---	3	15	13
E2E-X□M□12-M1	M12XP1	48	M12XP1	26	7	10	---	4	21	17
E2E-X□M□18-M1	M18XP1	53	M12XP1	38	10	10	---	4	29	24
E2E-X□M□30-M1	M30XP1.5	58	M12XP1	43	13	10	---	5	42	36
E2E-X□M□L8-M3-M5	M8XP1	49	M8XP1	36	6	8	---	3	15	13
E2E-X□M□L8-M1	M8XP1	53	M12XP1	36	6	8	---	3	15	13
E2E-X□M□L12-M1	M12XP1	70	M12XP1	55	7	10	---	4	21	17
E2EX□M□L18-M1	M18XP1	75	M12XP1	60	10	10	---	4	29	24
E2E-X□M□L30-M1	M30XP1.5	80	M12XP1	65	130 (15)	10	---	5	42	36


Note.1: E2E-Next series has one toothed washer.

Note.2: E2E(Q) means E2EQ series and E2EQ series is for welding process type and has the threaded body and sensing head covered with the fluorine resin for spatter resistance.


Note.3:
Fixing Nut set is as same as E2A series.

Product discontinuation Model E2A	Recommendable replacement Model E2E-Next series

M18 connector type with M12 size connector
(Non-shielded)
E2A-M18KN16-M1-**/ E2A-S18KN16-M1-**
E2A-M18LN16-M1-**/ E2A-S18LN16-M1-**

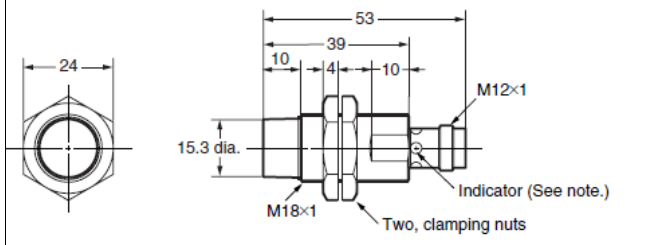


Note: Operation indicator (yellow LED, 4×90°)

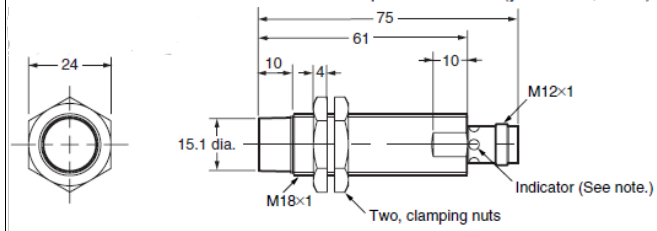


Note: Operation indicator (yellow LED, 4×90°)


M30 connector type with M12 size connector
(Non-shielded)
E2A-M30KN20-M1-**/ E2A-S30KN20-M1-**
E2A-M30LN30-M1-**/ E2A-S30LN30-M1-**

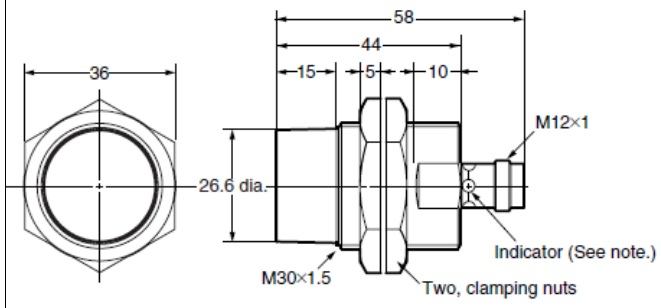

Note: Operation indicator (yellow LED, 4×90°)

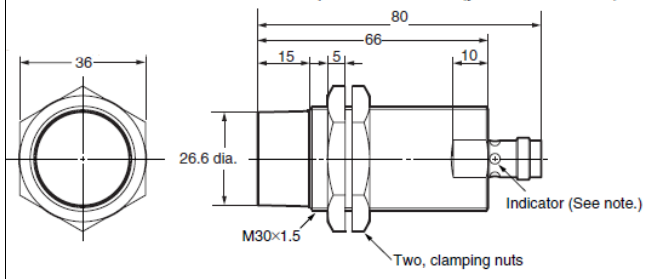

Note: Operation indicator (yellow LED, 4×90°)

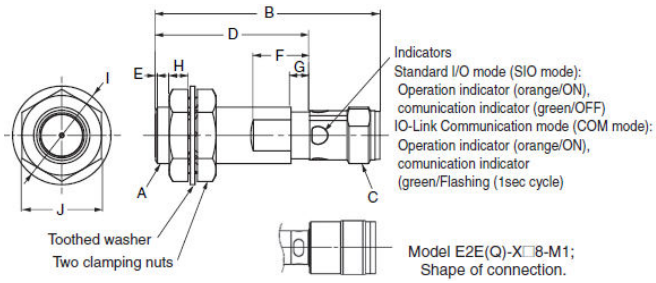

Shielded

Model	A	B	C	D	E	F *1	G *2	H	I	J
E2E(Q)-X□30 X□8-M3/M5	M8XP1	39	M8XP1	26	---	10 (8)	4	3	15	13
E2E(Q)-X□8-M1	M8XP1	43	M12XP1	26	---	10 (8)	4	3	15	13
E2E(Q)-X□12-M1	M12XP1	48	M12XP1	33	---	12 (10)	4	4	21	17
E2E(Q)-X□18-M1	M18XP1	53	M12XP1	38	---	12 (10)	4	4	29	24
E2E(Q)-X□30-M1	M30XP1.5	58	M12XP1	43	---	12 (10)	4	5	42	36
E2E-X□L8-M3/M5	M8XP1	49	M8XP1	36	---	8	---	3	15	13
E2E-X□L8-M1	M8XP1	53	M12XP1	36	---	8	---	3	15	13
E2E-X□L12-M1	M12XP1	70	M12XP1	55	---	10	---	4	21	17
E2E-X□L18-M1	M18XP1	75	M12XP1	60	---	10	---	4	29	24
E2E-X□L30-M1	M30XP1.5	80	M12XP1	65	---	10	---	5	42	36

Unshielded

Model	A	B	C	D	E *3	F	G *2	H	I	J
E2E-X□M□8-M3/M5	M8XP1	39	M8XP1	26	6	8	---	3	15	13
E2E-X□M□8-M1	M8XP1	43	M12XP1	26	6	8	---	3	15	13
E2E-X□M□12-M1	M12XP1	48	M12XP1	26	7	10	---	4	21	17
E2E-X□M□18-M1	M18XP1	53	M12XP1	38	10	10	---	4	29	24
E2E-X□M□30-M1	M30XP1.5	58	M12XP1	43	13	10	---	5	42	36
E2E-X□M□L8-M3-M5	M8XP1	49	M8XP1	36	6	8	---	3	15	13
E2E-X□M□L8-M1	M8XP1	53	M12XP1	36	6	8	---	3	15	13
E2E-X□M□L12-M1	M12XP1	70	M12XP1	55	7	10	---	4	21	17
E2EX□M□L18-M1	M18XP1	75	M12XP1	60	10	10	---	4	29	24
E2E-X□M□L30-M1	M30XP1.5	80	M12XP1	65	130 (15)	10	---	5	42	36


Note.1: E2E-Next series has one toothed washer.

Note.2: E2E(Q) means E2EQ series and E2EQ series is for welding process type and has the threaded body and sensing head covered with the fluorine resin for spatter resistance.


Note.3:
Fixing Nut set is as same as E2A series.

Product discontinuation Model E2A	Recommendable replacement Model E2E-Next series

M8 connector type with M8 size connector (Shielded)
E2A-S08KS02-M5-**/ E2A-S08KS02-M3-**
E2A-S08LS02-M5-**/ E2A-S08LS02-M3-**

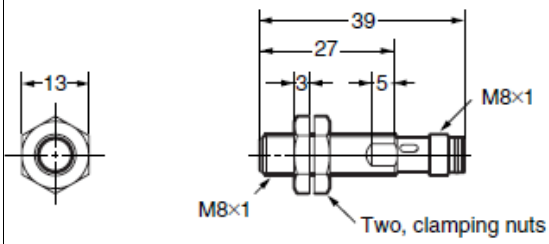


Note: Operation indicator (yellow LED, 4×90°)

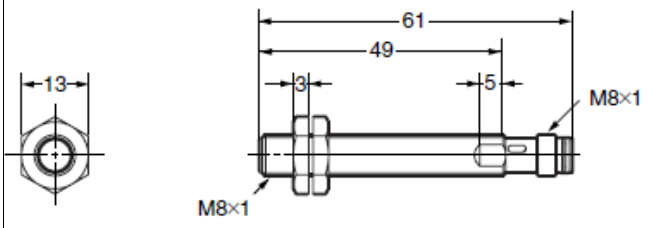


Note: Operation indicator (yellow LED, 4×90°)


M8 connector type with M8 size connector (Non-shielded)
E2A-S08KN04-M5-**/ E2A-S08KN04-M3-**
E2A-S08LN04-M5-**/ E2A-S08LN04-M3-**

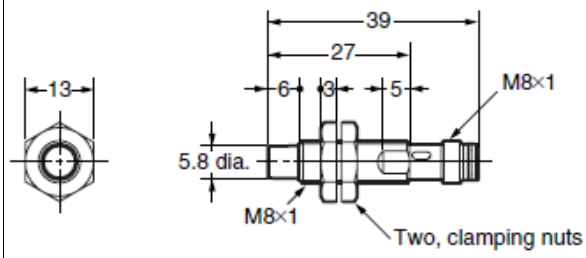

Note: Operation indicator (yellow LED, 4×90°)

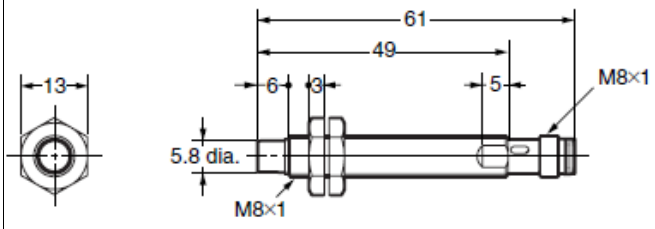

Note: Operation indicator (yellow LED, 4×90°)

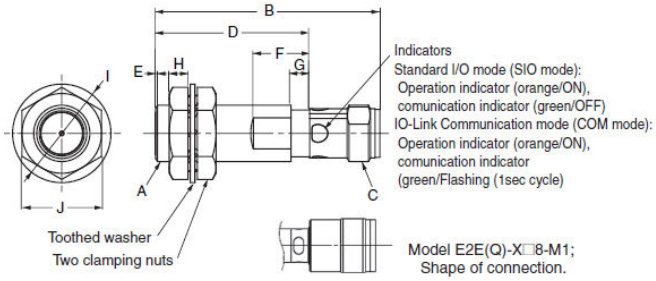

Shielded

Model	A	B	C	D	E	F *1	G *2	H	I	J
E2E(Q)-X□30 X□8-M3/M5	M8XP1	39	M8XP1	26	---	10 (8)	4	3	15	13
E2E(Q)-X□8-M1	M8XP1	43	M12XP1	26	---	10 (8)	4	3	15	13
E2E(Q)-X□12-M1	M12XP1	48	M12XP1	33	---	12 (10)	4	4	21	17
E2E(Q)-X□18-M1	M18XP1	53	M12XP1	38	---	12 (10)	4	4	29	24
E2E(Q)-X□30-M1	M30XP1.5	58	M12XP1	43	---	12 (10)	4	5	42	36
E2E-X□L8-M3/M5	M8XP1	49	M8XP1	36	---	8	---	3	15	13
E2E-X□L8-M1	M8XP1	53	M12XP1	36	---	8	---	3	15	13
E2E-X□L12-M1	M12XP1	70	M12XP1	55	---	10	---	4	21	17
E2E-X□L18-M1	M18XP1	75	M12XP1	60	---	10	---	4	29	24
E2E-X□L30-M1	M30XP1.5	80	M12XP1	65	---	10	---	5	42	36

Unshielded

Model	A	B	C	D	E *3	F	G *2	H	I	J
E2E-X□M□8-M3/M5	M8XP1	39	M8XP1	26	6	8	---	3	15	13
E2E-X□M□8-M1	M8XP1	43	M12XP1	26	6	8	---	3	15	13
E2E-X□M□12-M1	M12XP1	48	M12XP1	26	7	10	---	4	21	17
E2E-X□M□18-M1	M18XP1	53	M12XP1	38	10	10	---	4	29	24
E2E-X□M□30-M1	M30XP1.5	58	M12XP1	43	13	10	---	5	42	36
E2E-X□M□L8-M3-M5	M8XP1	49	M8XP1	36	6	8	---	3	15	13
E2E-X□M□L8-M1	M8XP1	53	M12XP1	36	6	8	---	3	15	13
E2E-X□M□L12-M1	M12XP1	70	M12XP1	55	7	10	---	4	21	17
E2EX□M□L18-M1	M18XP1	75	M12XP1	60	10	10	---	4	29	24
E2E-X□M□L30-M1	M30XP1.5	80	M12XP1	65	130 (15)	10	---	5	42	36

Note.1: E2E-Next series has one toothed washer.

Note.2: E2E(Q) means E2EQ series and E2EQ series is for welding process type and has the threaded body and sensing head covered with the fluorine resin for spatter resistance.

Note.3:
Fixing Nut set is as same as E2A series.

[The difference of characteristics and operation ratings.]

Item	Product discontinuation Model E2A series	Recommendable replacement Model E2E-Next series
Differential travel	10% max of sensing distance	15% max of sensing distance
Power supply voltage	12 to 24 VDC. Ripple(p-p): 10% max.	10 to 30 VDC (including 10% ripple (p-p)), Class 2
Load current (M8)	200 mA max. (32 VDC max.) When using any model at an ambient temperature between -40°C and -25°C and a power voltage between 30 and 32 VDC, use a load current of 100 mA max.,	1-output models: 10 to 30 VDC, Class 2, 200 mA max., (-40 to70° C), 100 mAmax., (70 to 85° C) 2-output models: 10 to 30 VDC,Class 2, 50 mAmax.
Load current (Other than M8 size)		1-output models: 10 to 30 VDC, Class 2, 200 mA max., 2-output models: 10 to 30 VDC, Class 2, 100 mA max.
Current consumption	10mA max.	1-output models: 16 mA max. 2-output models: 20 mA max.
Ambient air temperature	Operating: -40℃ to 70℃, Storage: -40 to 85 (with no icing or condensation)	Operating/Storage: -40 to 85°C (with no icing or condensation) Note: The UL temperature rating for M12 Pre-wired Connector Models is -25 to 70°C.
Temperature influence	±10% max. of sensing distance at 23℃ within temperature range of -25℃ to 70℃ ±15% max. of sensing distance at 23℃ within temperature range of -40℃ to 70℃	±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C ±15% max. of sensing distance at 23°C in the temperature range of -40 to 85°C

■The models that will not be discontinued.
Because of no alternative products, as following E2A series will not discontinued in 2022 March.
Table.2

Product Code	Model name	Comments for continue
E2A 1095R	E2A-M18KS08-M1-B2-20 OMS	Multipack
E2A 7073M	E2A-M30KN20-WP-C2 2M OMC	
E2A 7074R	E2A-M30KN20-WP-C1 2M OMC	
E2A 7075G	E2A-M30KN20-WP-B2 2M OMC	
E2A 7076E	E2A-M30KN20-WP-B1 2M OMC	
E2A 7077C	E2A-M30KN20-WP-C2 5M OMC	
E2A 7078A	E2A-M30KN20-WP-C1 5M OMC	
E2A 7079M	E2A-M30KN20-WP-B2 5M OMC	
E2A 7080C	E2A-M30KN20-WP-B1 5M OMC	
E2A 7081A	E2A-M30KN20-M1-C2 OMC	
E2A 7082M	E2A-M30KN20-M1-C1 OMC	
E2A 7083H	E2A-M30KN20-M1-B2 OMC	
E2A 7084F	E2A-M30KN20-M1-B1 OMC	
E2A 7145A	E2A-M18KS08-WP-C1 10M OMC	
E2A 7146M	E2A-M18KS08-WP-C1-1 5M OMC	
E2A 7147H	E2A-M12KS04-WP-B1 6M OMC	
E2A 7148F	E2A-M12KS04-WP-B2 8M OMC	
E2A 7149D	E2A-M18KS08-WP-B1 10M OMC	
E2A 7150H	E2A-M12KN08-WP-B1 10M OMC	
E2A 7151F	E2A-M18LS08-WP-B1-2 3.55M OMC	Customized
E2A 7152D	E2A-M18KS08-WP-B1 3.5M OMC	
E2A 7153B	E2A-M30LN30-WP-B2 10M OMC	
E2A 7154M	E2A-S18KS08-M1-B1 OMC	
E2A 7155R	E2A-S18KN16-M1-B1 OMC	
E2A 7156G	E2A-S30KS15-M1-B1 OMC	
E2A 7157E	E2A-S30KN20-M1-B1 OMC	
E2A 7158C	E2A-M18KS08-WS-B1 0.5M OMC	
E2A 7159A	E2A-M12LS04-WP-B1 7M OMC	
E2A 7160E	E2A-M12KS04-WP-B1 12M OMC	
E2A 7161C	E2A-M12KS04-WP-B1 10M OMC	
E2A 7162A	E2A-M30KS15-WP-B1 10M OMC	
E2A 7163M	E2A-M30KS15-WP-C1 10M OMC	
E2A 7164H	E2A-M12KS04-WP-C1 10M OMC	

Product Code	Model name	Comments for continue
E2A 7165F	E2A-M18KS08-WS-B1-3 2M OMC	Customized
E2A 7166D	E2A-M12KS04-WP-D1 2M OMC	
E2A 7167B	E2A-M12KN08-WP-D1 2M OMC	
E2A 7168M	E2A-M18KS08-WP-D1 2M OMC	
E2A 7169R	E2A-M18KN16-WP-D1 2M OMC	
E2A 7170B	E2A-M30KS15-WP-D1 2M OMC	
E2A 7171M	E2A-M30KN20-WP-D1 2M OMC	
E2A 7172R	E2A-M12KS04-WP-D2 2M OMC	
E2A 7173G	E2A-M12KN08-WP-D2 2M OMC	
E2A 7174E	E2A-M18KS08-WP-D2 2M OMC	
E2A 7175C	E2A-M18KN16-WP-D2 2M OMC	
E2A 7176A	E2A-M30KS15-WP-D2 2M OMC	
E2A 7177M	E2A-M30KN20-WP-D2 2M OMC	
E2A 7178H	E2A-M12LS04-WP-D1 2M OMC	
E2A 7179F	E2A-M12LN08-WP-D1 2M OMC	
E2A 7180M	E2A-M18LS08-WP-D1 2M OMC	
E2A 7181H	E2A-M18LN16-WP-D1 2M OMC	
E2A 7182F	E2A-M30LS15-WP-D1 2M OMC	
E2A 7183D	E2A-M30LN30-WP-D1 2M OMC	
E2A 7184B	E2A-M12LS04-WP-D2 2M OMC	
E2A 7185M	E2A-M12LN08-WP-D2 2M OMC	
E2A 7186R	E2A-M18LS08-WP-D2 2M OMC	
E2A 7187G	E2A-M18LN16-WP-D2 2M OMC	
E2A 7188E	E2A-M30LS15-WP-D2 2M OMC	
E2A 7189C	E2A-M30LN30-WP-D2 2M OMC	
E2A 7190G	E2A-M12KS04-WP-D1 5M OMC	
E2A 7191E	E2A-M18KS08-WP-D1 5M OMC	
E2A 7272E	E2A-S08KS02-WP-C1 3M OMC	
E2A 7273C	E2A-M12KS04-WP-D1-1 5M OMC	
E2A 7274A	E2A-M18KS08-WP-D1-1 5M OMC	
E2A 7278D	E2A-M18KS08-M1-B1-GP50 OMS	Customized
E2A 7279B	E2A-M12KN08-WP-B1 7M OMS	
E2A 7280F	E2A-M12KN05-WP-B1-TP 5M OMS	Customized
E2A 7281D	E2A-M12LN05-WP-B1-TP 5M OMS	Customized
E2A 7282B	E2A-S08KS01-WP-B1-TP 5M OMS	Customized

Product Code	Model name	Comments for continue
E2A 7283M	E2A-M18KS08-WS-B3-G1S 2.6M OMS	Customized
E2A 7284R	E2A-M18KS08-WS-B3-G3S 1.5M OMS	Customized
E2A 7292M	E2A-M18KS05-WP-B1 6M OMS	
E2A 7293H	E2A-S08KN04-WP-C1 10M OMS	
E2A 7294F	E2A-M12KN08-WP-B1 12M OMS	
E2A 7295D	E2A-S08KS02-WP-B1 3M OMS	
E2A 7296B	E2A-M12KN05-M1-B1-TP OMS	Customized
E2A 7298R	E2A-M12KS02-WP-B1-TP 5M OMS	Customized
E2A 7301B	E2A-M18KN10-WP-B1 10M OMS	
E2A 7302M	E2A-M18KN10-WP-B1-TP 5M OMS	Customized
E2A 7303R	E2A-M18KS05-WP-B1-TP 6M OMS	Customized
E2A 7304G	E2A-M18LS08-WP-B1 8M OMS	
E2A 7305E	E2A-M30KS15-WP-B2 10M OMS	
E2A 7306C	E2A-M30LS15-WP-B1 6M OMS	
E2A 7308M	E2A-S08KS01-M3-B1-TP OMS	Customized
E2A 7309H	E2A-M12KS04-WP-C1-BM 5M OMS	Customized
E2A 7310A	E2A-M18KS08-WS-B1-G1S 2.6M OMS	Customized
E2A 7311M	E2A-M18KS08-WS-B2-A 2M OMS	Customized
E2A 7312H	E2A-M18KS08-WS-B1-A 2M OMS	Customized
E2A 7313F	E2A-M18KS08-WS-B2-A 5M OMS	Customized
E2A 7314D	E2A-979944 OMS	Customized
E2A 7315B	E2A-979946 OMS	Customized
E2A 7316M	E2A-979947 OMS	Customized
E2A 7317R	E2A-08.02368 OMS	Customized
E2A 7318G	E2A-S12KN08-WP-B1 2M OMS	
E2A 7319E	E2A-M18LS08-WP-B3 15M OMS	
E2A 7323C	E2A-S08KS02-WP-B1 10M OMS	
E2A 7324A	E2A-S08KS02-WP-B1-1 0.05M OMS	Customized
E2A 7325M	E2A-S12KN05-M1-B1 OMS	
E2A 7329B	E2A-M12KS04-WS-C1-A 2M OMS	Customized
E2A 7331D	E2A-979974 OMS	Customized
E2A 7332B	E2A-979976 OMS	Customized
E2A 7333M	E2A-979978 OMS	Customized
E2A 7335G	E2A-M12LS02-WP-B1-TP 5M OMS	Customized
E2A 7347M	E2A-S08KS02-WP-C2-ASS 3M OMS	Customized

Product Code	Model name	Comments for continue
E2A 7348R	E2A-M18KS05-M1-B3-Z1 OMS	Customized
E2A 7349G	E2A-S08LS02-WP-D1 2M OMS	
E2A 7350M	E2A-M18KS08-WS-B3-G2S 0.5M OMS	Customized
E2A 7351R	E2A-M18KS08-M1-B1-S OMS	Customized
E2A 7352G	E2A-S30KS15-WP-B1-LW 5M OMS	Customized
E2A 7353E	E2A-S30KS15-WP-C1-LW 5M OMS	Customized
E2A 7354C	E2A-7621800 OMS	Customized
E2A 7355A	E2A-M12LS04-M1-B1-FE OMS	Customized
E2A 7356M	E2A-S08KS01-WP-B1 6M OMS	
E2A 7357H	E2A-M12KS04-WP-B1 1M OMS	
E2A 7358F	E2A-M12KN08-WP-HI25 1M OMS	Customized
E2A 7359D	E2A-M18KN16-WP-B1 10M OMS	
E2A 7360H	E2A-M12KS04-WP-B2 3M OMS	
E2A 7361F	E2A-M12KS04-WP-B2 6M OMS	
E2A 7362D	E2A-M18LN16-WP-B2-2 2M OMS	Customized
E2A 7363B	E2A-S08LS02-WP-B2 10M OMS	
E2A 7364M	E2A-S08KS02-WP-B2 10M OMS	
E2A 7365R	E2A-S18KS08-WS-B1 5M OMS	
E2A 7366G	E2A-S12KN08-WP-C1 2M OMS	
E2A 7367E	E2A-S12KS04-WP-B1 2M OMS	
E2A 7368C	E2A-S12KS04-M1-B1 OMS	
E2A 7369A	E2A-M30KS15-WP-D1 3M OMS	
E2A 7370E	E2A-M18LS08-WS-B1-M01 OMS	Customized
E2A 7371C	E2A-M18LS08-WP-B1 6M OMS	
E2A 7372A	E2A-08.02368.1 OMS	Customized
E2A 7373M	E2A-M18KS08-WP-B2 1M OMS	
E2A 7374H	E2A-M30KS15-WP-B1 1M OMS	
E2A 7375F	E2A-M30KS15-WP-B2-1 1M OMS	Customized
E2A 7376D	E2A-Z4300010 OMS	Customized
E2A 7377B	E2A-M18LS08-WP-B1-1 3.55M OMS	Customized
E2A 7378M	E2A-M18LS08-WP-B1-1 6M OMS	Customized
E2A 7379R	E2A-M18LS08-M1-D1 OMS	
E2A 7380B	E2A-M12KS04-WP-B1 0.4M OMS	
E2A 7381M	E2A-M12KS04-WP-C1 0.4M OMS	
E2A 7382R	E2A-S12KN08-M1-B1 OMS	

Product Code	Model name	Comments for continue
E2A 7383G	E2A-M12KN08-WP-HI25 0.28M OMS	Customized
E2A 7384E	E2A-S08KS02-M5-C1-4 OMS	Gold plated PIN
E2A 7385C	E2A-S08LS02-M5-C1-4 OMS	Gold plated PIN
E2A 7386A	E2A-M12KN08-M1-B1-4 OMS	Gold plated PIN
E2A 7387M	E2A-M12KS04-M1-B1-4 OMS	Gold plated PIN
E2A 7388H	E2A-M18LS08-M1G-D1 OMS	
E2A 7389F	E2A-M12KS04-WP-C1-1 0.4M OMS	Customized
E2A 7390M	E2A-M12KS04-WP-B1-1 0.4M OMS	Customized
E2A 7391H	E2A-M18KS08-WP-B1 11M OMS	
E2A 7392F	E2A-M30LS15-WP-B2 10M OMS	
E2A 7393D	E2A-S08LS02-WP-D1 5M OMS	
E2A 7394B	E2A-S12KS04-M1-C1 OMS	
E2A 7395M	E2A-M18KS08-M1J-B1 0.5M OMS	
E2A 7396R	E2A-S18LS08-WS-C1 2M OMS	
E2A 7397G	E2A-S12KS04-WS-C1 7.5M OMS	
E2A 7398E	E2A-M12LN05-M1-B1-TP OMS	Customized
E2A 7399C	E2A-M12KN08-WP-D1 5M OMS	
E2A 7401R	E2A-M12KS04-M1J-B1 0.75M OMS	
E2A 7402G	E2A-S08KS02-WP-D1 2M OMS	
E2A 7403E	E2A-S12LS04-M1-B1 OMS	
E2A 7404C	E2A-S18KS08-WP-B1 5M OMS	
E2A 7405A	E2A-S18LS08-M1-B1 OMS	
E2A 7406M	E2A-M12KS04-M5-B1 OMS	
E2A 7407H	E2A-M18KS08-M5-B1 OMS	
E2A 7408F	E2A-S12LS04-WP-B1 2M OMS	
E2A 7409D	E2A-S18KS08-WP-B1 2M OMS	
E2A 7410H	E2A-S08KS02-WP-D2 2M OMS	
E2A 7413B	E2A-M18KN10-WP-C1-1 0.8M OMS	Customized
E2A 7414M	E2A-S08KS02-WP-B2-1 0.2M OMS	Customized
E2A 7415R	E2A-S12KS04-WP-B1 5M OMS	
E2A 7416G	E2A-S30LS15-WP-B1 2M OMS	
E2A 7417E	E2A-M18KS08-M1G-D1 OMS	
E2A 7418C	E2A-M12KS04-M1G-D1 OMS	
E2A 7420E	E2A-M12KS04-M5-B2 OMS	
E2A 7421C	E2A-M12KS04-M3-B1 OMS	

Product Code	Model name	Comments for continue
E2A 7422A	E2A-S12KS04-M5-B1 OMS	
E2A 7423M	E2A-M12KN08-M5-B1 OMS	
E2A 7424H	E2A-M12KN08-M3-B1 OMS	
E2A 7425F	E2A-M12KS04-M5-C1 OMS	
E2A 7426D	E2A-M12KS04-M3-C1 OMS	
E2A 7427B	E2A-M18KS08-M3-B1 OMS	
E2A 7428M	E2A-M18KN16-M5-B1 OMS	
E2A 7429R	E2A-M18KS08-M5-C1 OMS	
E2A 7430B	E2A-M18KN16-M5-C1 OMS	
E2A 7434E	E2A-M12LS04-M5-B1 OMS	
E2A 7435C	E2A-M12LS04-M3-B1 OMS	
E2A 7436A	E2A-M12LN08-M5-B1 OMS	
E2A 7437M	E2A-M12LN08-M3-B1 OMS	
E2A 7438H	E2A-M18LS08-M5-B1 OMS	
E2A 7439F	E2A-M18LN16-M5-C1 OMS	
E2A 7440M	E2A-S12KS04-M1-B2 OMS	
E2A 7441H	E2A-M30KS10-WP-B1-TP 5M OMS	Customized
E2A 7442F	E2A-M18LN10-WP-B1-TP 5M OMS	Customized
E2A 7444B	E2A-S30KS15-M5-B1 OMS	
E2A 7445M	E2A-S12KN05-M1-B2 OMS	
E2A 7446R	E2A-S12LS04-M1-C1 OMS	
E2A 7447G	E2A-S12KS04-WP-C1 2M OMS	
E2A 7448E	E2A-S12LS04-WP-C1 2M OMS	
E2A 7449C	E2A-S18KS08-M1-C1 OMS	
E2A 7450G	E2A-S18LS08-M1-C1 OMS	
E2A 7451E	E2A-S18KS08-WP-C1 2M OMS	
E2A 7452C	E2A-S18LS08-WP-C1 2M OMS	
E2A 7453A	E2A-S18LS08-WP-B1 2M OMS	
E2A 7454M	E2A-S30KS15-WP-B1 5M OMS	
E2A 7455H	E2A-S30KS15-WP-C1 5M OMS	
E2A 7456F	E2A-S30KS15-WP-B1 2M OMS	
E2A 7457D	E2A-S18KN16-WP-B1 5M OMS	
E2A 7458B	E2A-S18KN16-WP-B1 2M OMS	
E2A 7459M	E2A-S18KS08-WS-B1 10M OMS	
E2A 7460D	E2A-S12KS04-WS-B1 5M OMS	

Product Code	Model name	Comments for continue
E2A 7461B	E2A-S12KS04-M5-C1 OMS	
E2A 7467A	E2A-S08KS02-M1G-D1 OMS	
E2A 7468M	E2A-S08KN04-M1G-D1 OMS	
E2A 7469H	E2A-S08KN04-WP-D1 2M OMS	
E2A 7470A	E2A-S08KN04-WP-D2 2M OMS	
E2A 7480R	E2A-S08LS02-M5-B1-S OMS	
E2A 7481G	E2A-P08KS02-M5T2-B1 OMS	Customized
E2A 7482E	E2A-P08KS02-M5T3-B1 OMS	Customized
E2A 7483C	E2A-P08KS02-M5T1-B2 OMS	Customized
E2A 7484A	E2A-P08LS02-M5-B2 OMS	Customized
E2A 7485M	E2A-M18KS08-WS-B2-1 OMS	
E2A 7487F	E2A-M12KS04-M3-B2 OMS	
E2A 7488D	E2A-S18LS08-WP-C2 2M OMS	
E2A 7489B	E2A-M12KN08-M5-B2 OMS	
E2A 7490F	E2A-M12KN08-M3-B2 OMS	
E2A 7491D	E2A-M12KS04-M5-C2 OMS	
E2A 7492B	E2A-S18KS08-WP-B2 5M OMS	
E2A 7493M	E2A-S18KN16-WP-B2 5M OMS	
E2A 7495G	E2A-S12LS04-WP-B2 2M OMS	
E2A 7496E	E2A-S12KS04-M1-C2 OMS	
E2A 7497C	E2A-M12LN08-M3-B2 OMS	
E2A 7498A	E2A-M12LN08-M5-C2 OMS	
E2A 7499M	E2A-M18LS08-M3-B1 OMS	
E2A 7500G	E2A-S12LN08-M1-B1 OMS	
E2A 7501E	E2A-S12KS04-M5-B2 OMS	
E2A 7502C	E2A-S18KS08-M5-B1 OMS	
E2A 7503A	E2A-S18KS08-M5-B2 OMS	
E2A 7504M	E2A-S12KS04-WP-B2 2M OMS	
E2A 7505H	E2A-S18LN16-WP-B1 2M OMS	
E2A 7506F	E2A-S12LS04-M1J-C1 0.5M OMS	
E2A 7507D	E2A-S12KN08-WP-B1 20M OMS	
E2A 7508B	E2A-S18KS08-M1-B2 OMS	
E2A 7509M	E2A-S08KS02-M1G-D2 OMS	
E2A 7510D	E2A-S08KN04-M1G-D2 OMS	
E2A 7511B	E2A-S08LN04-M5J-B1 0.3M OMS	

Product Code	Model name	Comments for continue
E2A 7512M	E2A-S08LN04-M5J-B1 0.6M OMS	
E2A 7513R	E2A-S08KN04-WP-B1 10M OMS	
E2A 7528G	E2A-S08KS01-M5J-B1 0.3M OMS	
E2A 7530R	E2A-S08KS02-M5-B1-2 OMS	
E2A 7531G	E2A-S08KS02-M5-B2-2 OMS	
E2A 7532E	E2A-P08LS02-M5-B1 OMS	Customized
E2A 7533C	E2A-P08LS02-M5T2-B1 OMS	Customized
E2A 7541D	E2A-M12KS04-WP-B3 8M OMS	
E2A 7544R	E2A-M18KS08-WP-B3 10M OMS	
E2A 7553H	E2A-M30KN20-WP-B3 2M OMS	
E2A 7554F	E2A-M30KN20-M1-B3 OMS	
E2A 7576G	E2A-M30KN20-WP-C3 2M OMS	
E2A 7578C	E2A-M30KN20-M1-C3 OMS	
E2A 7580E	E2A-M12KS04-WP-B3 6M OMS	
E2A 7581C	E2A-M30KS10-WP-C3 15M OMS	
E2A 7582A	E2A-M30KS10-WP-B3 15M OMS	
E2A 7583M	E2A-M30KS10-WP-C3 20M OMS	
E2A 7584H	E2A-M30KS10-WP-B3 10M OMS	
E2A 7585F	E2A-M18LS08-WP-B3 10M OMS	
E2A 7586D	E2A-M12KS04-WS-B3 2M OMS	
E2A 7588M	E2A-S18KS08-WP-B3 10M OMS	
E2A 7592R	E2A-S18LN16-M1-B3 OMS	
E2A 7593G	E2A-S18LS08-M1-B3 OMS	
E2A 7594E	E2A-M30LS15-WP-B3 20M OMS	
E2A 7595C	E2A-S12LN08-M1-B3 OMS	
E2A 7596A	E2A-S12LN08-M1-C3 OMS	
E2A 7597M	E2A-M18KS08-M1J-B1-L 0.5M OMS	Customized
E2A 7598H	E2A-M30KS15-WP-B3 10M OMS	
E2A 7599F	E2A-S08LS02-WP-B3 2M OMS	
E2A 7600C	E2A-S08LN04-WP-B3 2M OMS	
E2A 7601A	E2A-S08LS02-M3-B3 OMS	
E2A 7602M	E2A-S08LN04-M3-B3 OMS	
E2A 7603H	E2A-M18KS08-M1-B3-4 OMS	Customized
E2A 7604F	E2A-S08KN04-WP-C1-51 1.1M OMS	Customized
E2A 7605D	E2A-M18KS08-WS-HI OMS	Customized

Product Code	Model name	Comments for continue
E2A 7606B	E2A-S12KS04-WS-C1 OMS	Customized
E2A 7607M	E2A-M12KS04-WP-HI 1M OMS	Customized
E2A 7610M	E2A-S12LS04-M1-C3 OMS	
E2A 7611R	E2A-M18LS08-M1-B1-JF OMS	Customized
E2A 7612G	E2A-M12KN08-M1G-D1 OMS	
E2A 7613E	E2A-M12KS04-M1-B1-20 OMS	Multipack
E2A 7614C	E2A-M12LS04-M1-B1-20 OMS	Multipack
E2A 7615A	E2A-S08KS02-M3-B1-20 OMS	Multipack
E2A 7616M	E2A-M18KS08-M1-B1-20 OMS	Multipack
E2A 7617H	E2A-M12KS04-M1-C1-20 OMS	Multipack
E2A 7618F	E2A-M12KN08-M1-B1-20 OMS	Multipack
E2A 7619D	E2A-S08KS02-M3-C1-20 OMS	Multipack
E2A 7620H	E2A-M18KN16-M1-B1-20 OMS	Multipack
E2A 7621F	E2A-M18KS08-M1-B1-C20 OMS	Customized
E2A 7622D	E2A-M30KS15-M1-B1-C10 OMS	Customized
E2A 7623B	E2A-M30LN30-WA-B1-54 0.5M OMS	Customized
E2A 7624M	E2A-M18LS08-WP-B1-3 0.115M OMS	Customized
E2A 7628C	E2A-S08LS02-WP-D2 2M OMS	
E2A 7629A	E2A-S08LS02-WP-D2 5M OMS	

Specifications and prices in this product news are as of the issue date and are subject to change without notice.
Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.

Omron Electronics GmbH

Automation
Elisabeth-Selbert-Straße 17
D-40764 Langenfeld

Telefon: +49 (0)2173 68 00-0
Fax: +49 (0)2173 68 00-400
E-Mail: info_de@omron.com

Robotics
Revierstraße 5
D-44379 Dortmund

Telefon: +49 (0)231 75 89 4-0
Fax: +49 (0)231 75 89 4-50
E-Mail: info_de@omron.com

industrial.omron.de

«Customer_Name» «Address_Line_1»
Leitung Einkauf
«Address_Line_2»
«Postal_Code» «City»

20.01.2021

Produktabkündigung der E2A,E2E,E2E2 und E2EM Reihen

Sehr geehrte Damen und Herren,

hiermit informieren wir Sie über die Abkündigung der Sensoren aus folgender Produktgruppe:

E2A,E2E,E2E2 und E2EM Reihen

Die letzte Bestellmöglichkeit für alle Modelle aus dieser Reihe ist der **31.01.2022**.
Als Alternative empfehlen wir die **E2E-NEXT Reihe**.

Für die Auswahl eines für Sie geeigneten Nachfolgemodells steht Ihnen selbstverständlich der für Sie zuständige Vertriebsingenieur oder unser Technical Support Team jederzeit gern beratend zur Seite.

Technical Support Sensing
Mail.: cr.Sensing@omron.com
Tel. : +49 (0) 2173 6800 592

Mit freundlichen Grüßen

Omron Electronics GmbH

i. V. Mathias Schneidler
Teamleader Technical Support
DACH

i. A. Simon Mühlig-Versen
Technical Support Engineer
DACH

Geschäftsführer: Dr. Klaus Kluger, Yvonne Uyum-Westerman
Sitz: Langenfeld, HR Abt. B 46335 Amtsgericht Düsseldorf
Bank JPMorgan Bank Luxembourg S.A.
IBAN: LU65 0670 0070 0004 7679 / **Bic/Swift:** CHASLULX