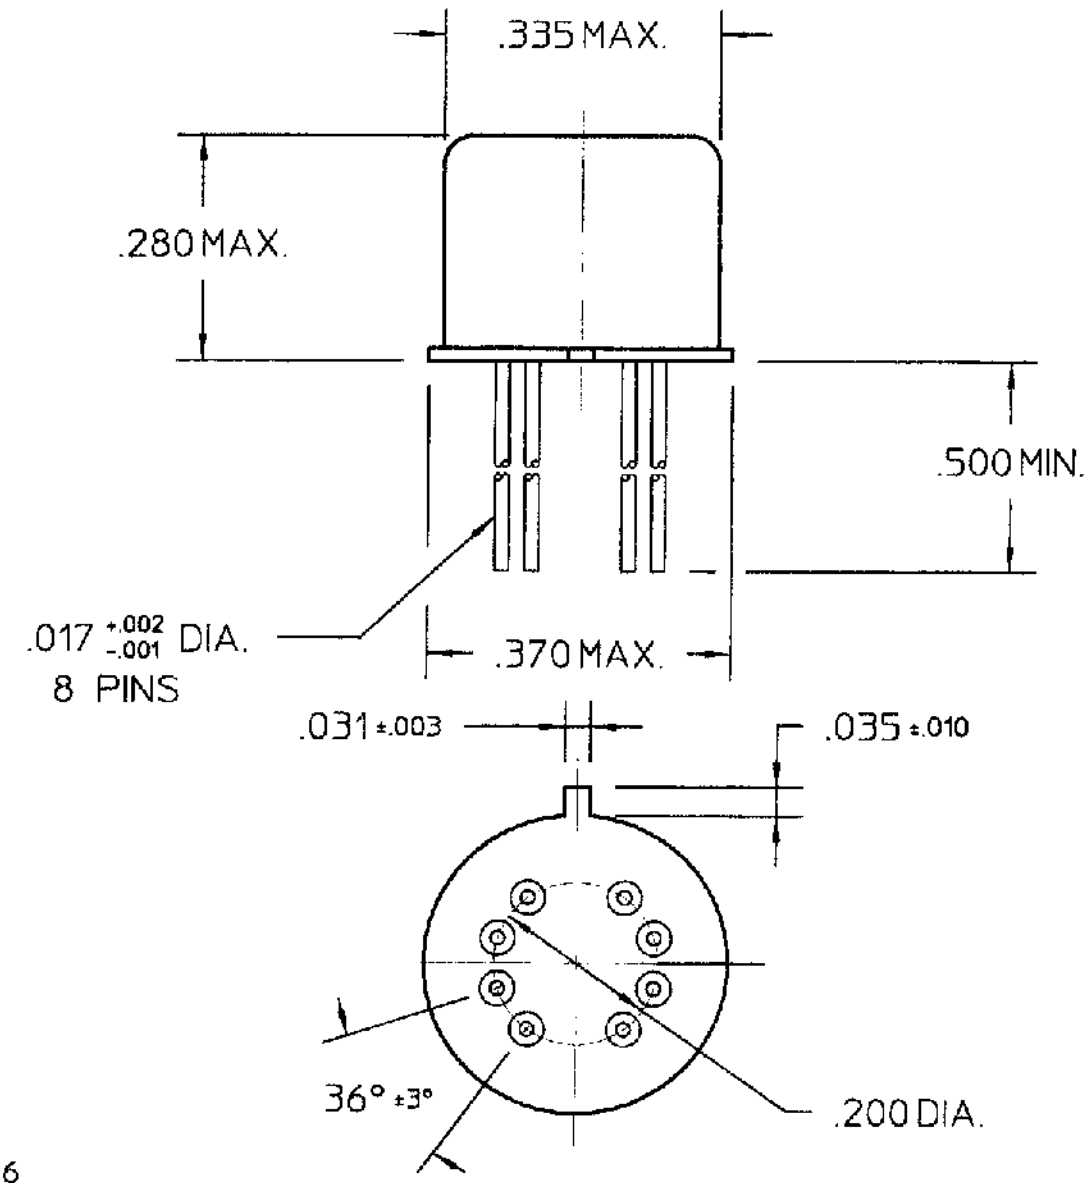


REV. 0

142386

COIL: @ 25°C

RESISTANCE 880 OHMS ±10%

NOMINAL VOLTAGE 18.0 VDC

MUST OPERATE 11.5 VDC

MUST RELEASE 7.3 VDC MAX. 1.4 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX

RELEASE TIME 4.0 MS MAX

CONTACT STABILIZATION TIME 2.0 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 8/11/99 | CK. TLG 10-12-00

CII Technologies
advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/20-053M REV.

"JMADD" RELAY

JMACDD-18XM