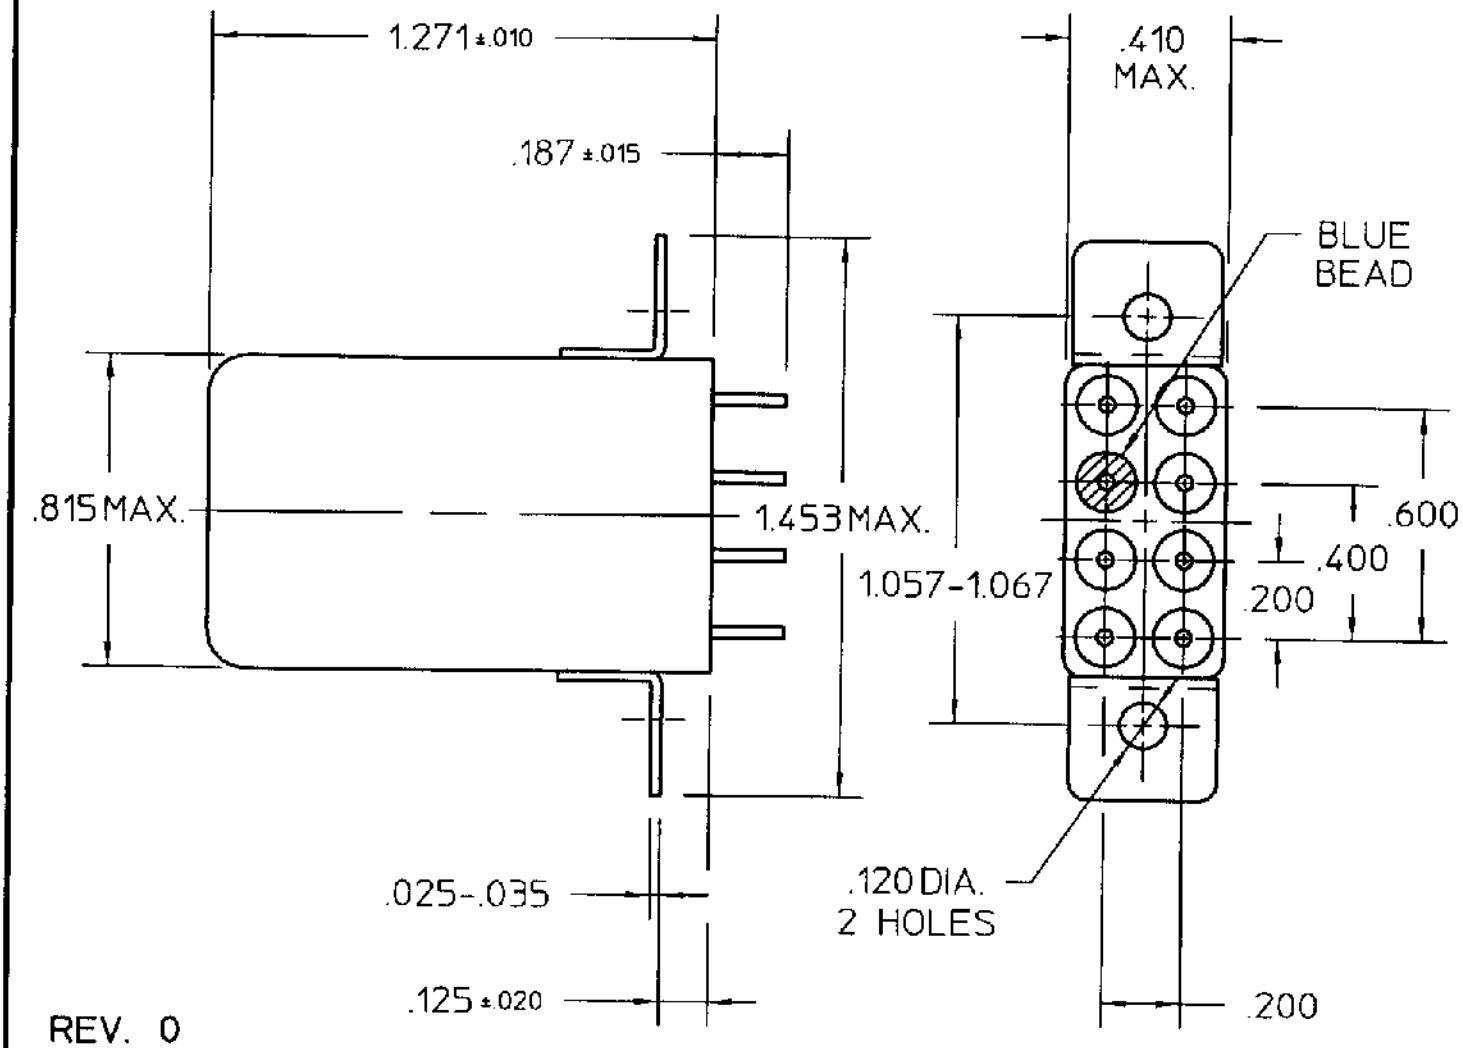


REV. 0
DCO 170339

COIL: @ 25°C

RESISTANCE 5000 OHMS

NOMINAL VOLTAGE 6.0 mADC

MUST OPERATE 2.8 mADC

MUST RELEASE 1.4 mADC MAX, 0.3 mADC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX
RELEASE 10 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

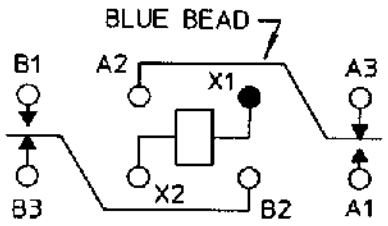

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 12/6/00 | CK. TLG 12-11-00

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-101 REV.

3SAT RELAY

3SAT1318A2

F-719 REV 3