




Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

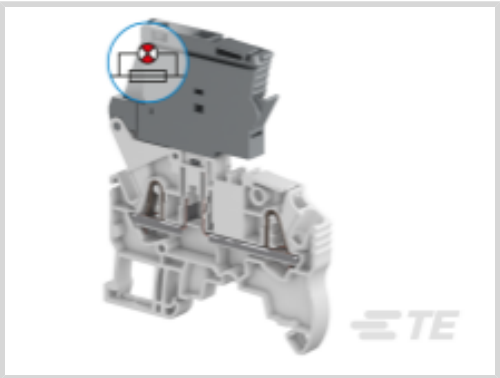

Block Function: **Fuse**

Modular Terminal Block Product Type: **PI-Spring Terminal Block**

Primary Product Color: **Gray & Dark Gray**

Product Spacing: **6 mm [ .236 in ]**

Number of Positions: **2**

Features

Product Type Features

|                                     |                          |
|-------------------------------------|--------------------------|
| Modular Terminal Block Product Type | PI-Spring Terminal Block |
|-------------------------------------|--------------------------|

Configuration Features

|                     |                  |
|---------------------|------------------|
| Number of Levels    | 1                |
| Gauge Type          | A2 / 2.3 mm Dia. |
| Number of Circuits  | 1                |
| Block Function      | Fuse             |
| Number of Positions | 2                |

Electrical Characteristics

|                                                          |         |
|----------------------------------------------------------|---------|
| Power Loss                                               | 1.6 W   |
| Operating Voltage Rating (UL & CSA) (Max) - Main Circuit | 300 V   |
| Impulse Withstanding Voltage Rating (IEC)                | 6000 V  |
| Current Rating (IEC)                                     | 6.3 A   |
| Current Rating (UL)                                      | 16 A    |
| Current Rating (CSA)                                     | 16 A    |
| Voltage Rating (IEC)                                     | 500 V   |
| Voltage Rating (CSA)                                     | 300 V   |
| Operating Voltage                                        | 300 VAC |



Body Features

|                       |                  |
|-----------------------|------------------|
| Product Weight        | 16.3 g[.642 oz]  |
| Primary Product Color | Gray & Dark Gray |

Termination Features

|                                    |                 |
|------------------------------------|-----------------|
| Termination Method to Wire & Cable | Spring Terminal |
|------------------------------------|-----------------|

Mechanical Attachment

|                         |                   |
|-------------------------|-------------------|
| DIN Rail Mounting Type  | TH35-15, TH35-7.5 |
| Connector Mounting Type | DIN Rail          |

Housing Features

|                  |           |
|------------------|-----------|
| Housing Material | Polyamide |
|------------------|-----------|

Dimensions

|                                                                     |                           |
|---------------------------------------------------------------------|---------------------------|
| Main Circuit Capacity - Twin Ferrule per Spring Clamp               | 26 – 20 AWG               |
| Product Depth                                                       | 72.5 mm[2.854 in]         |
| Tool Size                                                           | 3.5 mm[.138 in]           |
| Wire Stripping Length                                               | 11 mm[.433 in]            |
| Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp | 26 – 12 AWG               |
| Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp    | 26 – 14 AWG               |
| Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp        | 26 – 14 AWG               |
| Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp       | .22 – 2.5 mm <sup>2</sup> |
| Product Length                                                      | 72.5 mm[2.854 in]         |
| Product Height                                                      | 63.1 mm[2.484 in]         |
| Product Spacing                                                     | 6 mm[.236 in]             |
| Wire Size                                                           | 12 AWG                    |

Usage Conditions

|                                |                            |
|--------------------------------|----------------------------|
| Installation Temperature Range | -5 – 40 °C[23 – 104 °F]    |
| Operating Temperature Range    | -55 – 110 °C[-67 – 230 °F] |

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Industry Standards

|                        |          |
|------------------------|----------|
| IP Rating              | IP20     |
| UL Flammability Rating | UL 94V-0 |



Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2022 (224)<br>Does not contain REACH SVHC |
| Halogen Content                               | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.                                                                          |
| Solder Process Capability                     | Not reviewed for solder process capability                                                                                      |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1SNK900611R0000  
UMH




TE Part # 1SNK900002R0000  
BAZ1



TE Part # 1SNK900107R0000  
CS-R3



TE Part # 1SNK705911R0000  
EK2.5-3P

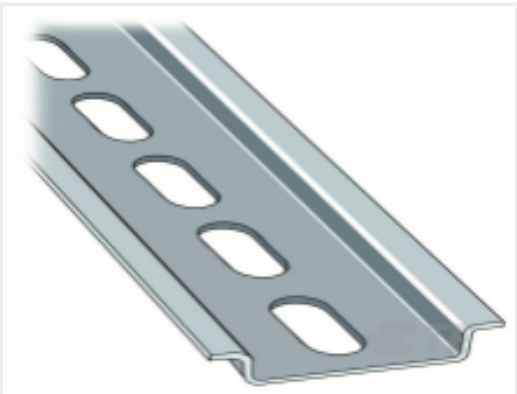

TE Part # 1SNA173220R0500  
[PR30](#)




TE Part # 1SNK900659R0000  
[TO3.5-50-A](#)




TE Part # 1SNK140000R0000  
[MC512](#)



TE Part # 1SNK900203R0000  
[TP2](#)

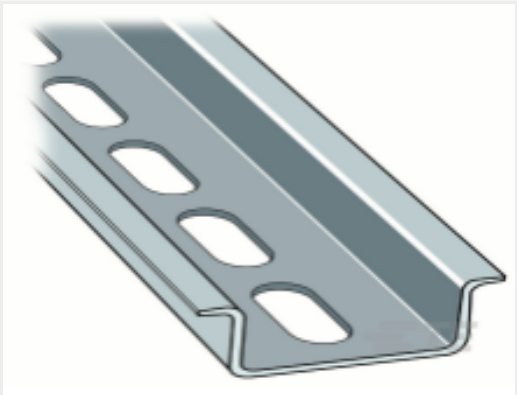


TE Part # 1SNA178529R0400  
[PR50](#)

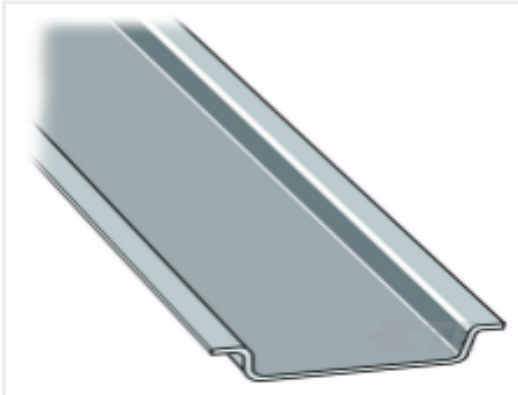

TE Part # 1SNA174300R1700  
[PR3.Z2](#)



TE Part # 1SNK159999R0000  
[MC612PA](#)

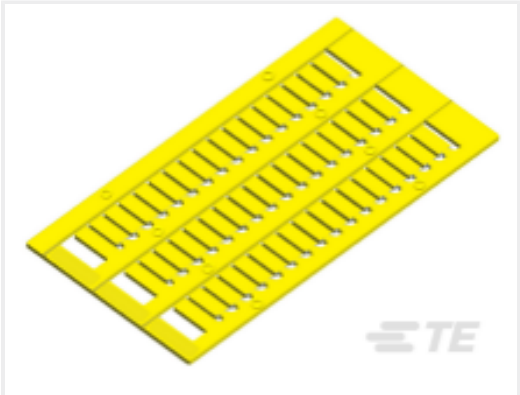

TE Part # 1SNK150004R0000  
[MC612-YL](#)




TE Part # 1SNK905303R0000  
[JB5-3](#)



TE Part # 1SNK905302R0000  
[JB5-2](#)



TE Part # 1SNK900105R0000  
[ES-TC6](#)

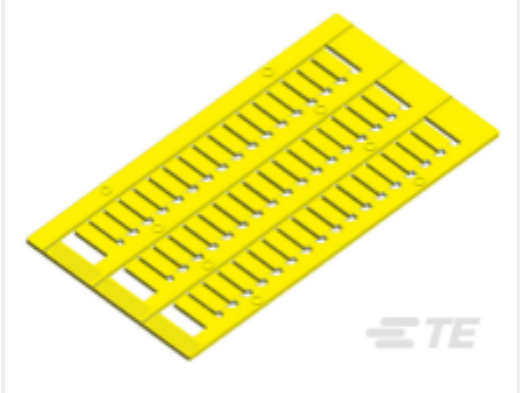

TE Part # 1SNK140004R0000  
[MC512-YL](#)



TE Part # 1SNK906305R0000  
[JB6-5](#)



TE Part # 1SNK906310R0000  
[JB6-10](#)




TE Part # 1SNK900201R0000  
[TC5-R1](#)



TE Part # 1SNK900102R0000  
[BAZH1](#)


Also in the Series | **ENTRELEC SNK**

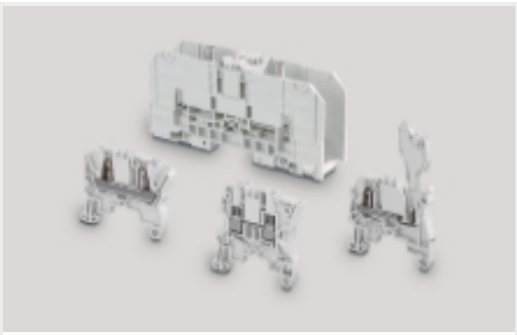

[Modular Terminal Blocks\(319\)](#)



[Terminal Block & Strip Conducting Accessories\(67\)](#)

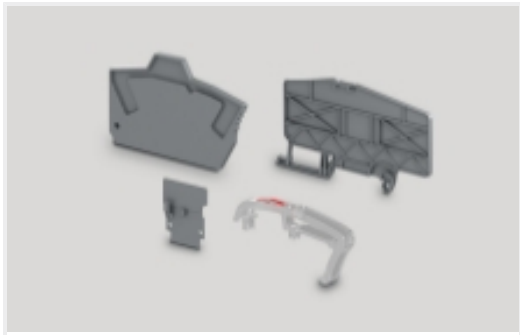

[Terminal Block & Strip Insulating Accessories\(31\)](#)

Customers Also Bought



TE Part #1SET411023R0000  
WD-1-DP-GR8080



TE Part #1SNA290350R2100  
D2.5/5.C3.L



TE Part #1SNK705511R0000  
ZK2.5-T1



TE Part #1SNK905350R0000  
JB5-50



TE Part #1SNK705910R0000  
EK2.5



TE Part #1SNK705020R0000  
ZK2.5-BL




TE Part #1SNK900002R0000  
BAZ1



TE Part #1SNK905310R0000  
JB5-10



TE Part #1SNK705513R0000  
ZK2.5-L-N-PE

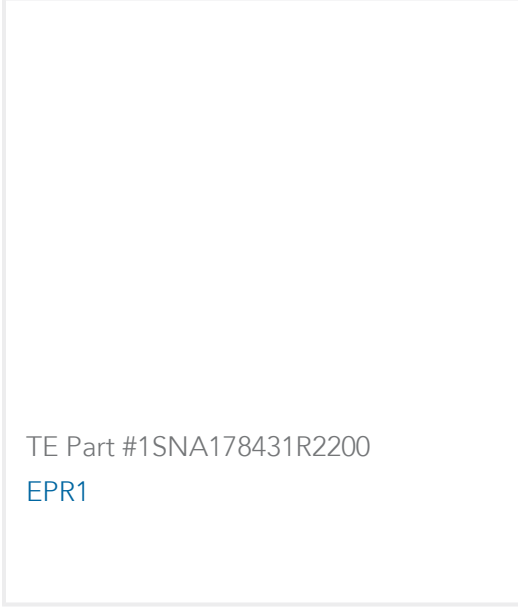

TE Part #1SNA178431R2200  
EPR1

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1SNK706411R0000\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK706411R0000\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK706411R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ZK2.5-SF-R1

English

ENTRELEC Terminal Block - Master Catalog



[ENTRELEC Terminal Block - Master Catalog](#)

English

[SNK SERIES TERMINAL BLOCKS](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)

[Essential Entrelec Terminal Blocks](#)

French

[Essential Entrelec Terminal Blocks](#)

English

[Essential Entrelec Terminal Blocks](#)

Japanese

---

[Agency Approvals](#)

[CB-IEC-ZK--SF-FR\\_641211](#)

English