




Terminals & Splices > PCB Terminals

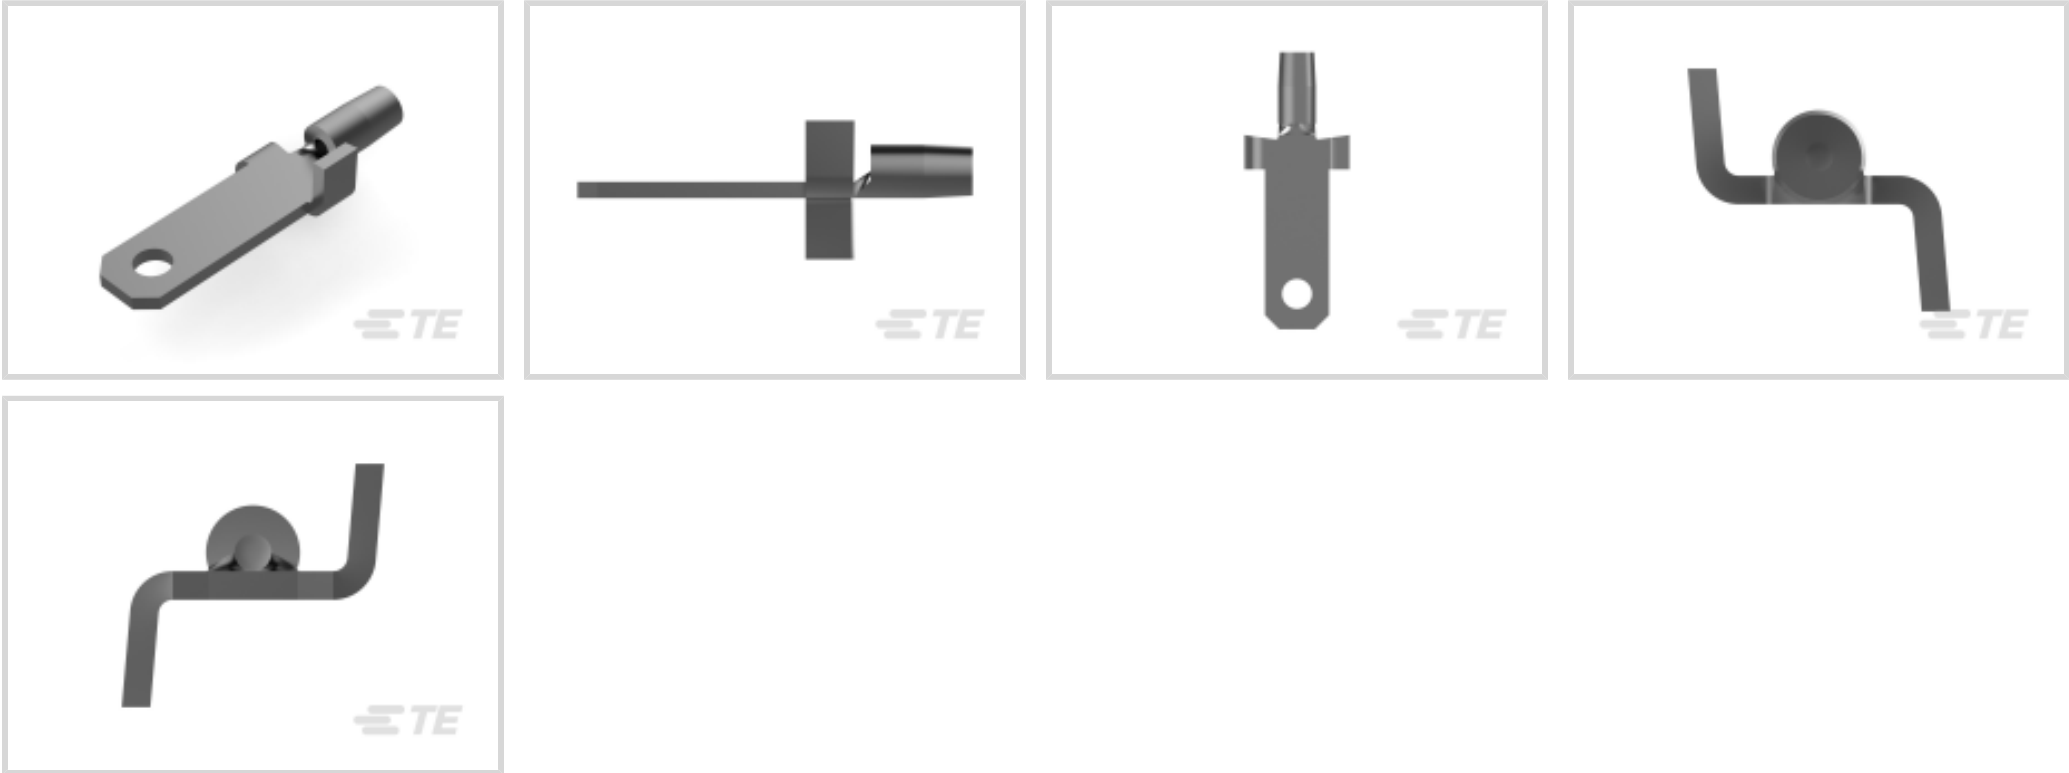

PCB Terminal Type: **Tab**

PCB Thickness (Recommended): **.81 – 2.36 mm [.032 – .093 in]**

Mating Tab Width: **2.79 mm [.11 in]**

Mating Tab Thickness: **.51 mm [.02 in]**

PCB Hole Diameter: **1.4 mm [.488 in]**

Features


Contact Features

PCB Contact Termination Area Plating Material Thickness	3.81 µm[150 µin]
Contact Underplating Material Thickness	2.54 µm[100 µin]
Contact Mating Area Plating Material Thickness	3.81 µm[150 µin]
PCB Terminal Type	Tab
Mating Tab Width	2.79 mm[.11 in]
Mating Tab Thickness	.51 mm[.02 in]
Terminal Plating Material	Tin
Contact Underplating Material	Brass
Terminal Size	2.8
Terminal Orientation	Straight

Termination Features

Termination Method to PCB	Through Hole - Solder
Product Terminates To	Printed Circuit Board

Mechanical Attachment





Wire Insulation Support	With
-------------------------	------

Dimensions

Terminal Material Thickness	.51 mm[.02 in]
PCB Thickness (Recommended)	.81 – 2.36 mm[.032 – .093 in]
PCB Hole Diameter	1.4 mm[.488 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-30 – 110 °C[-22 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	4000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 63838-1
187 FASTON TAB TPBR

TE Part # 1742428-1
110 FASTON,TAB,PCB,TPBR

TE Part # 63603-1
187 FASTON TAB TPBR

TE Part # 63525-1
187 FASTON TAB TPBR

TE Part # 1742014-1
110 FASTON,PCB TAB,TPBR

TE Part # 63823-1
187 FASTON TAB TPBR

TE Part # 63756-1
110 FASTON TAB TPBR

TE Part # 62650-1
250 FASTON TAB TPBR

TE Part # 62221-1
187 FASTON TAB TPBR

TE Part # 62395-1
110 FASTON TAB TPBR

Also in the Series | FASTON 110

Crimp Terminal Housings(13)

Insertion & Extraction Tools(1)

PCB Terminals(22)

Quick Disconnects(163)

Customers Also Bought



TE Part #61407-3
187 FASTON TPBR



TE Part #6-104362-1
12 MTE HDR SRST LATCH W/HLDWN



TE Part #4-794629-4
14P MICRO MNL ASSY,R/A,SMT,LF




TE Part #CAT-P851-T1
PCB Power Relay: 30 amp, Monostable DC



TE Part #1571527-2
FSM2JSMLTR=TACT SWITCH,SMT,T&R



TE Part #1860991-1
RT78602, RELAY SOCKET PCB 5MM

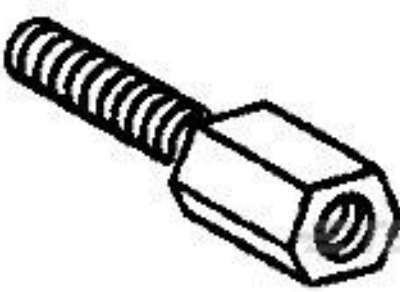

TE Part #5747877-3
FEMALE SCREWLOCK ZINC CLEAR



TE Part #6609042-2
6VS1=F7247 S0

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_61968-1_BB_c-61968-1-bb.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_61968-1_BB_c-61968-1-bb.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_61968-1_BB_c-61968-1-bb.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

FASTON PCB Tabs and Receptacles

English

PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS

English

Product Specifications

Application Specification

English

Agency Approvals

CSA Certificate

English

61968-1

Tab PCB Terminal, 2.79 mm [.11 in] Tab Width, 1.4 mm [.488 in] PCB Hole, Through Hole - Solder, Tin Plating, Reel, FASTON 110



CSA Certificate

English