

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-9A0245~248	2009/04/14	Li Xiu Zhi	Change SR View & Update Note
C	LEN1480057~060	2014/07/28	Vicky	Update Logo

ALTW

ALTW

ALTW

ALTW


ALTW

ALTW

ALTW


ALTW

ALTW





- Note:**
- * $\varnothing$ Important Dimension To Check
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Screw Nut: Nylon+GF, Black
 - * O-Ring: EPDM, Black
 - * Cable: UL2464 20AWG*6C+Drain+Al/My, Black,PVC Jacket,UV Resistant,OD=6.5
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

CB-06AFFM-SL7AXX
XX :01~99Meters
01 :01Meter
02 :02Meters
:
99 :99Meters
Cable Length(L):01~99Meters



Conn.

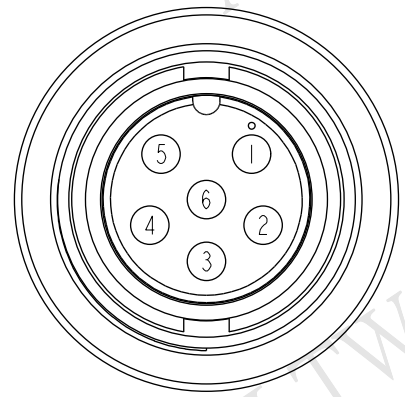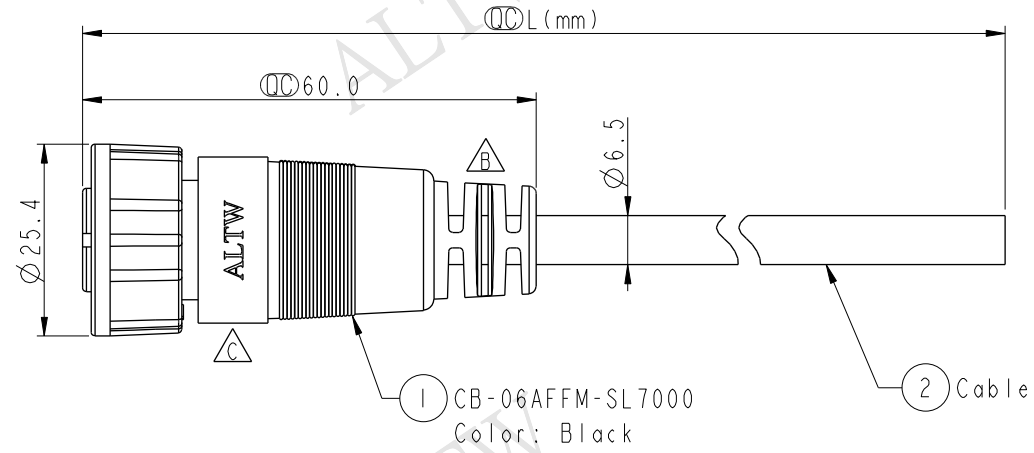

Pin Assignments
Front View

6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

UNIT:mm		TITLE
TOLERANCE	± 0.5 mm	Middle Cable Screw 6Pin F Conn F Pin
SCALE	1:1	SIZE A4
REV.	C	WC-REV. A.1
		$\varnothing$: Inspection item

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	CB-06AFFM-SL7AXX	ALTW	Vicky	Sam	Rita	2014-07-28
						2014-07-28
						2014-07-28

Amphenol LTW
安費諾亮泰企業股份有限公司