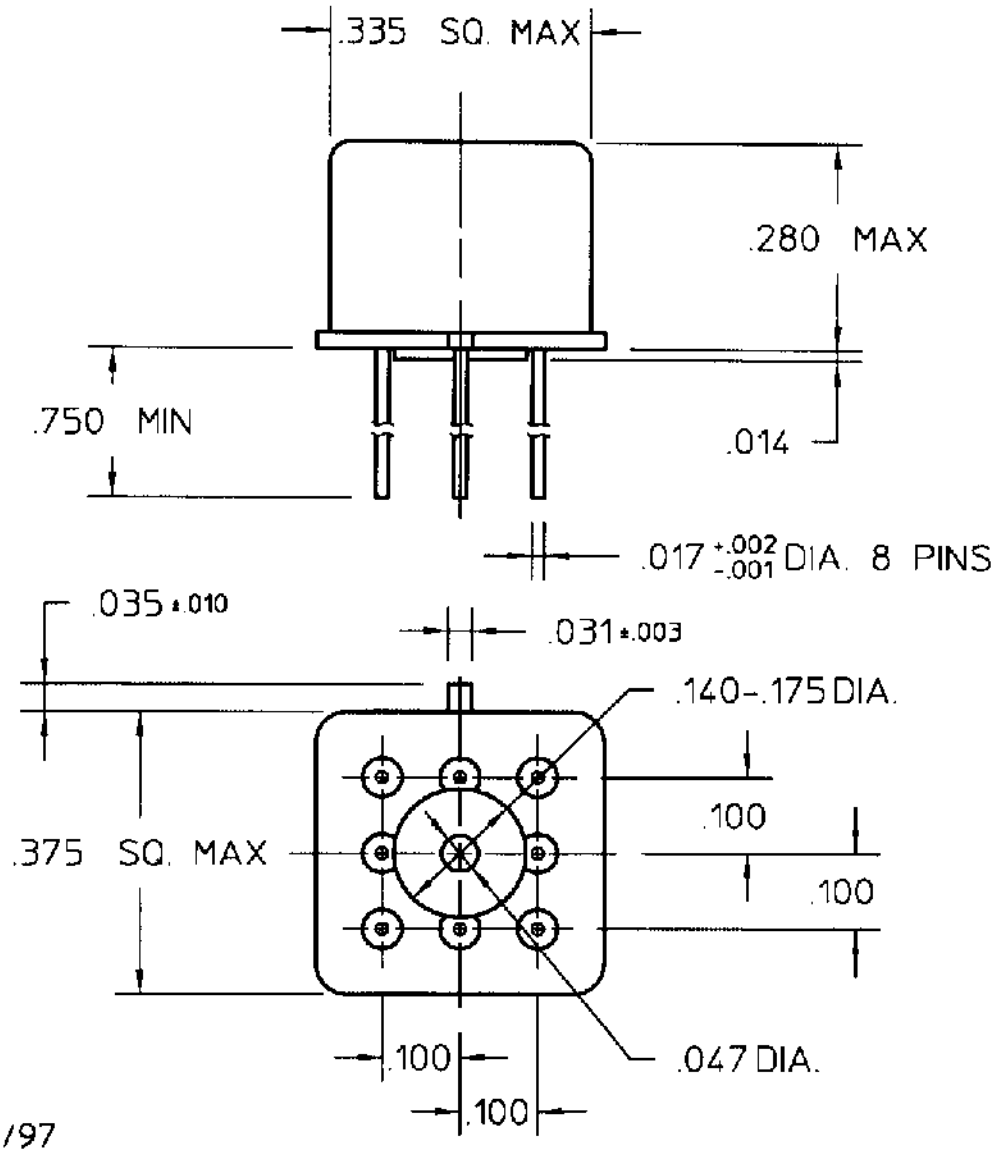


REV. 1 11/20/97

COIL: @ 25°C

RESISTANCE 64 OHMS ± 10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 3.8 VDC

MUST RELEASE

ENVIRONMENT:


VIBRATION 10 CPS TO 500 CPS @ 10 g's

SHOCK 30 g's 6 MS. DURATION

TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 3.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN.

DR. R.B. 9/8/93 CK [illegible] 4/24/97

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.
CUST. NO.

TYPE "HC" RELAY

HC3-5B