1376133-2 ✔ ACTIVE


Dynamic Series | Dynamic 3000 Series

TE Internal #: 1376133-2

PCB Mount Header, Horizontal, Wire-to-Board, 4 Position, 5.08 mm [.2 in] Centerline, Fully Shrouded, Gold (Au), Dynamic 3000 Series

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > Header Assembly: Wire-to-Board, 15A, gold or tin plated

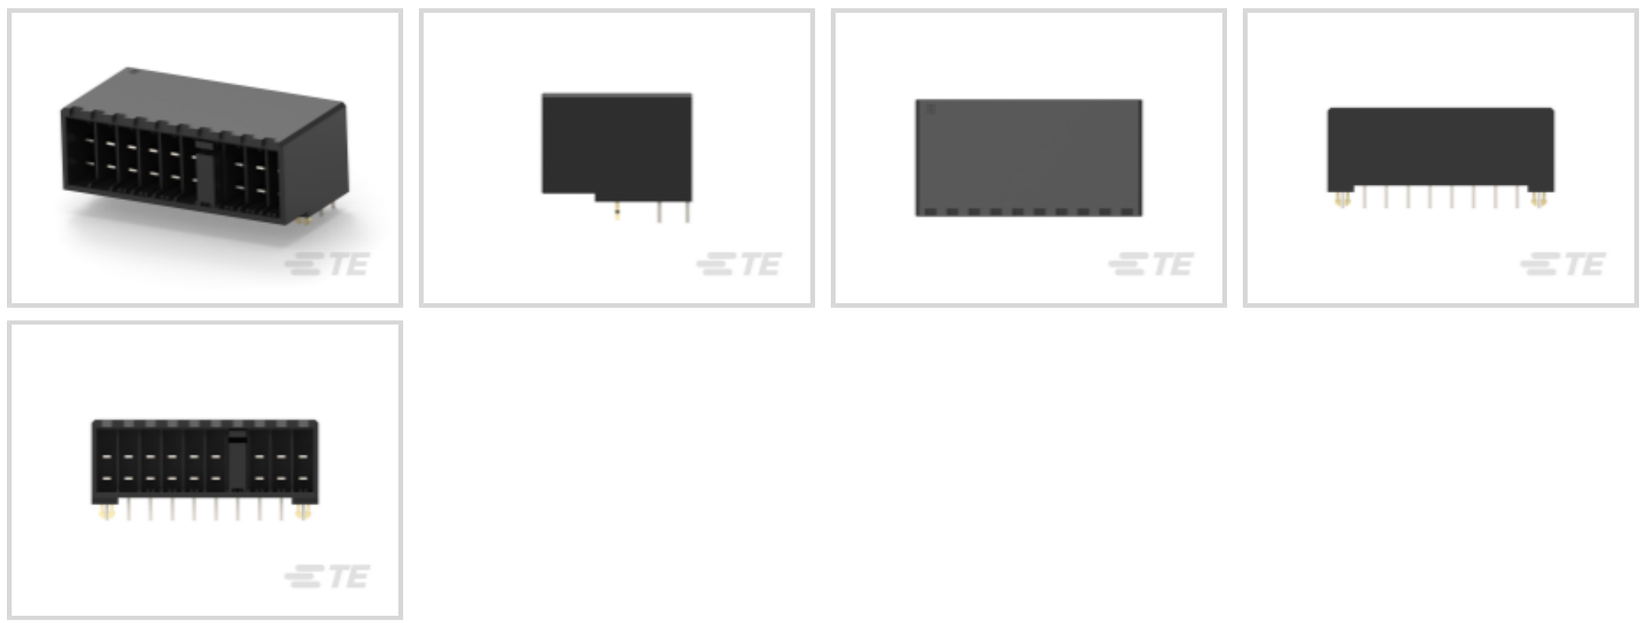

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Horizontal**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **5.08 mm [.2 in]**

All Header Assembly: Wire-to-Board, 15A, gold or tin plated (16)

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

PCB Mount Orientation	Horizontal
Number of Positions	4
Number of Rows	2

Electrical Characteristics

Operating Voltage	250 VAC

Body Features

Connector & Keying Code	X
PCB Retention Feature Material	Brass
PCB Retention Feature Plating Material	Tin over Nickel
Primary Product Color	Black

Contact Features

Contact Underplating Material	Nickel
Contact Shape & Form	Rectangular
Contact Layout	Matrix
Contact Mating Area Length	11 mm[.433 in]
Contact Base Material	Copper Alloy
Mating Tab Thickness	.5 mm[.019 in]
Contact Mating Area Plating Material	Gold (Au)
Contact Mating Area Plating Material Thickness	.381 µm[15 µin]
Contact Type	Tab
Contact Current Rating (Max)	15 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Termination Post & Tail Length	3.8 mm[.149 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Retention Type	Retention Leg
Mating Alignment Type	Polarization
PCB Mount Alignment	Without
Mating Retention	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Centerline (Pitch)	5.08 mm[.2 in]
Housing Material	Polyester GF

Dimensions

Row-to-Row Spacing	5.08 mm[.2 in]

PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application	Power & Signal

Industry Standards

UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




TE Part # 175363-1
DYNAMIC D-3500 REC HSG 4P

Also in the Series | Dynamic 3000 Series




Connector Contacts(94)

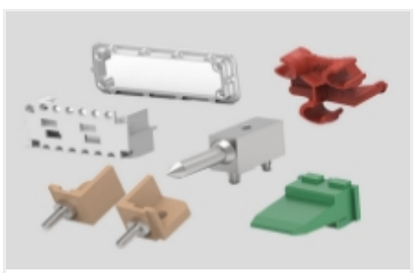


Connector Hardware(8)



Insertion & Extraction Tools(2)

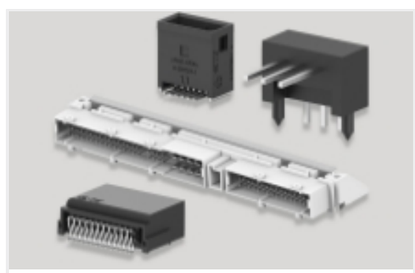

PCB Headers & Receptacles(290)

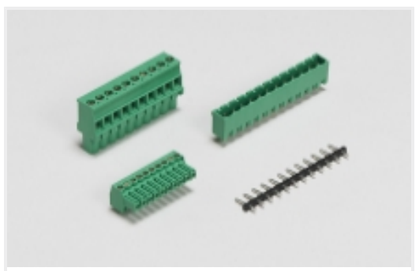


PCB Terminal Blocks(5)



Power Contacts(94)



Rectangular Power Connectors(443)

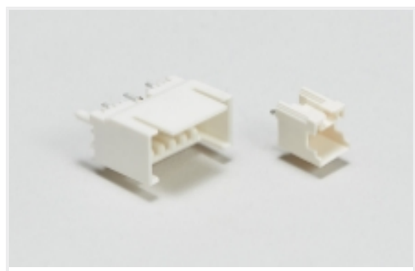

Wire-to-Board Headers & Receptacles (290)

Customers Also Bought



TE Part #3-338315-2
25POS.HD20 REC.ASSY



TE Part #2-1879458-1
RL73N 1H R68 1% 5K RL



TE Part #4-2176216-2
CPF A 0603 10K 0.1% 25PPM 1K RL



TE Part #3-2229794-1
D3950 REC 3POS 1ROW X KEY MARKED



TE Part #1-2229803-1
D3950 HDR 11POS 1ROW X KEY



TE Part #1-2349949-6
D1200D REC HSG 12P X BLACK PA9T GF33



TE Part #2-2834465-4
MINI DYNAMIC HDR H 24P TIN X-KEY BLK



TE Part #3-5175475-5
CHAMP 050 B/B REC V W/LEG 40P



TE Part #5179031-4
0.8FH,P08H.5,100,08/Sn,TU



TE Part #6-1393234-7
RP421012

Documents

Product Drawings

DYNAMIC D-3500 HDR ASSY 4P PdNi PL

English

CAD Files

3D PDF

3D

Customer View Model
ENG_CVM_CVM_1376133-2_D.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_1376133-2_D.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_1376133-2_D.3d_stp.zip

English

3D PDF

English

Customer View Model
ENG_CVM_1376133-2_A.2d_dxf.zip

English

Customer View Model
ENG_CVM_1376133-2_A.3d_igs.zip

English

Customer View Model
ENG_CVM_1376133-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

DYNAMIC 3500 SERIES

English

Product Specifications

Product Specification

English

Spark Suppressor Connector, MK-II

English

Agency Approvals

UL

English