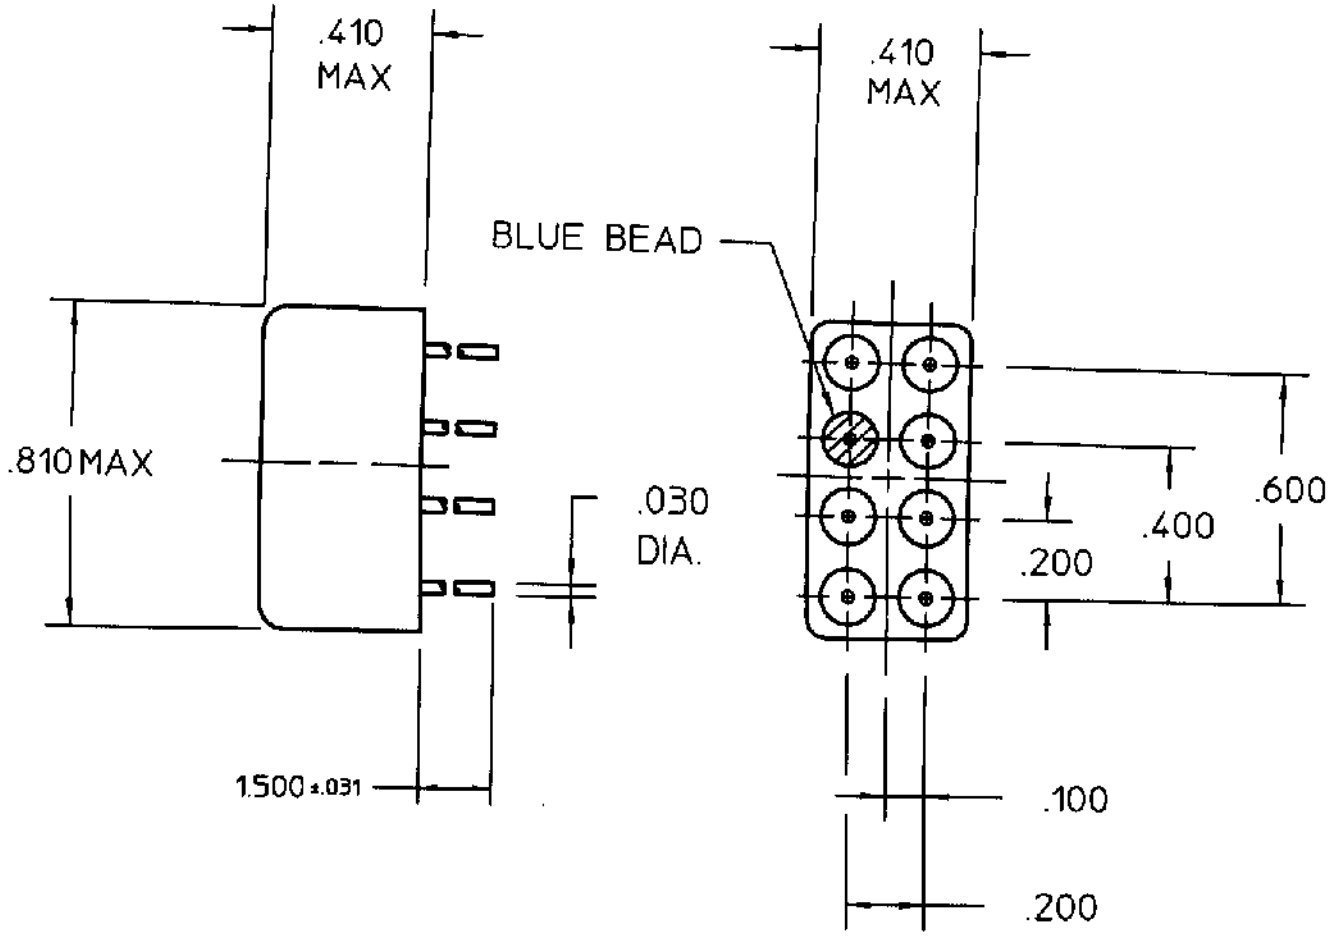


REV. 0

DCO 15679

COIL: @ +25 ° C

RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX
RELEASE 2 MS MAX
BOUNCE 3 MS MAX

CUSTOMER DATA SHEET

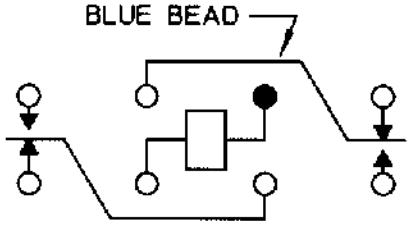

TERMINAL VIEW

CONTACT RATING: 2A 30 VDC
RESISTIVE .75A 30 VDC INDUCTIVE
100,000 OPERATIONS

DR. B.D. 6/1/99 | CK. GAH 6-1-99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2K-4A-126

TYPE "HFW" RELAY

HFW1501S26