

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PRODUCT DRAWING (EAR 14311)	SEP25/14	K.L.

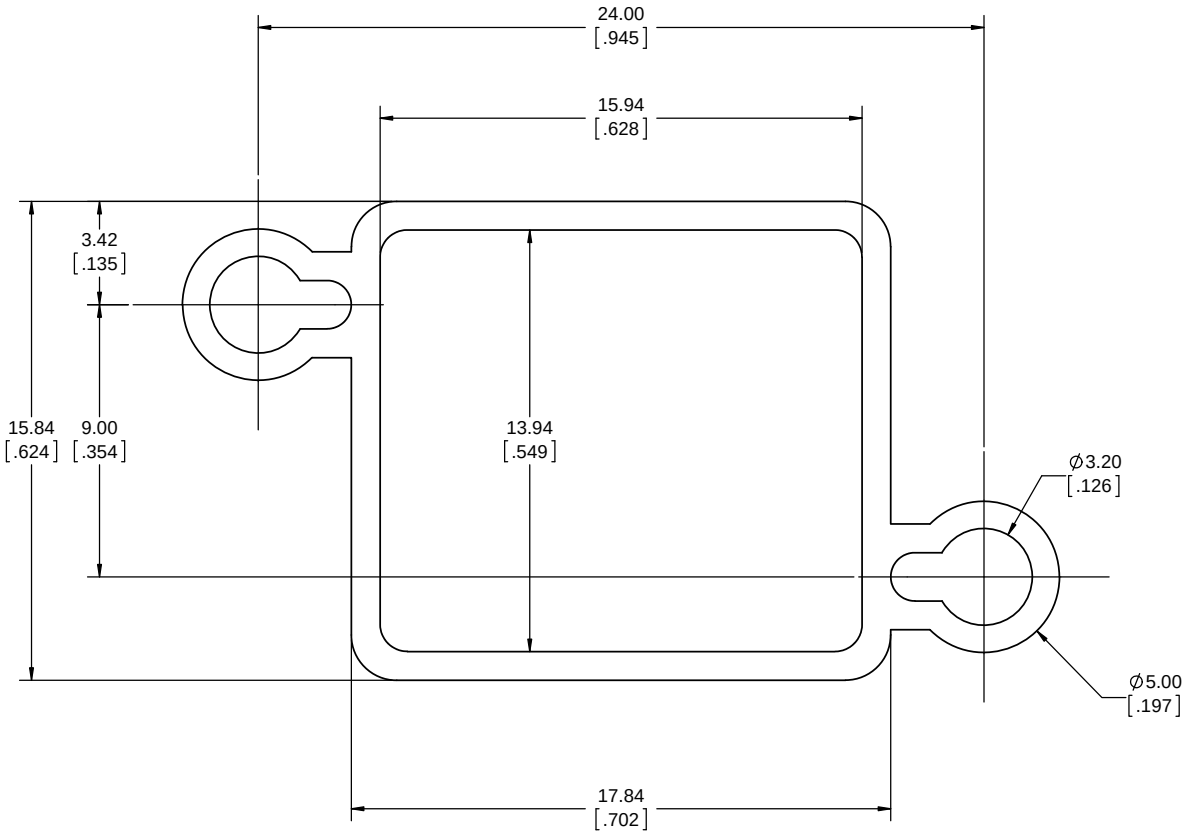

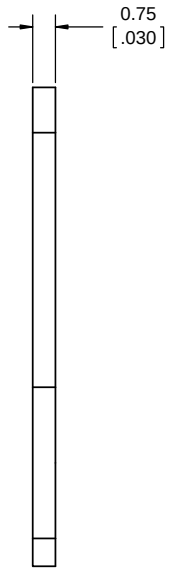

NOTES

1. MATERIAL: CONDUCTIVE SILICONE RUBBER, 75 SHORE A DUROMETER, COLOUR - BLACK, 2.0 Ohm-cm VOLUME RESISTIVITY. UL94V-0 FLAMMBILITY.
2. OPERATING TEMPERATURE: -65°C TO 200°C.
3. GASKET IS RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU AND AMENDMENTS.
4. PART SUPPLIED BULK PACKED.

AMPHENOL PART NUMBER: MRJ-258A-41BP

AMPHENOL CANADA CORP RoHS COMPLIANT 2011/65/EU RECAST

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN A. HUANG	SEP25/14
PRIMARY UNITS MILLIMETERS	CHECKED	
SECONDARY INCHES	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR. K.LAMBIE	SEP25/14
1 DECIMAL PLACE	ENG. REL. NO. EAR 14311	
2 DECIMAL PLACES	REF.	
3 DECIMAL PLACES	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES		

Amphenol Canada Corp.
www.amphenolcanada.com

MRJ SERIES PANEL GASKET, CONDUCTIVE RUBBER, RoHS COMPLIANT

DWG. NO.	REV
P-MRJ-258A-41BP	A

CODE ID NO. 03554 | DWG SIZE: X | SCALE: 8:1 | SHEET 1 OF 1