
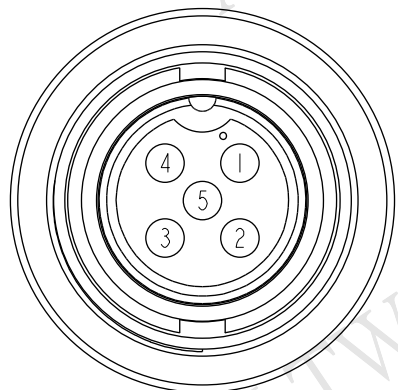
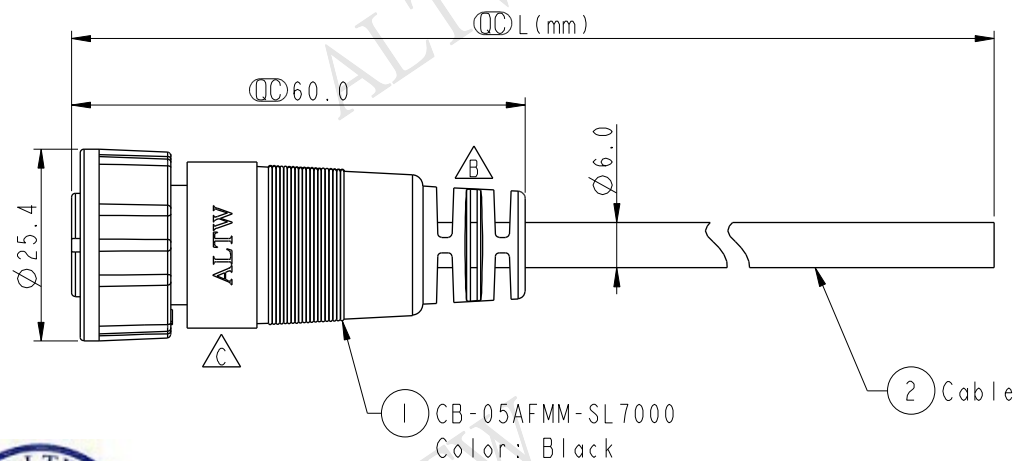


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-9A0235~238	2009/04/14	Li Xiu Zhi	Change SR View & Update Note
C	LEN1480046~049	2014/07/28	Vicky	Update Logo

Conn.

Pin Assignments

Front View

5	Green	綠
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

CB-05AFMM-SL7AXX

```

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
      :
      :
      :
99 : 99Meters

```

Cable Length(L):01~99Meters

B Note:

- *  Important Dimension To Check
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Screw Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Cable: UL2464 20AWG*5C+Drain+Al/My,
Black,PVC Jacket,UV Resistant,OD=6.0
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT : mm

TOLERANCE

± 0.5 mm

TITLE	Middle Cable Screw 5Pin F Conn M Pin
-------	--------------------------------------

SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. C	WC-REV. A.1	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2014-07-28
DWG NO CB-05AFMM-SL7AXX	CHECKED BY Sam	DATE 2014-07-28
CUSTOMER ALTW	APPROVED BY Rita	DATE 2014-07-28