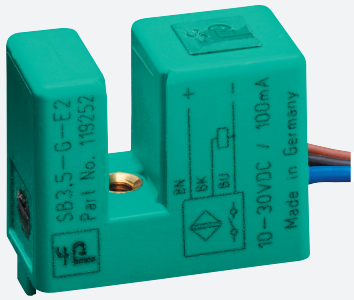

Inductive slot sensor

SB3,5-G-E2-2M

- 3.5 mm slot width
- Basic series

Dimensions

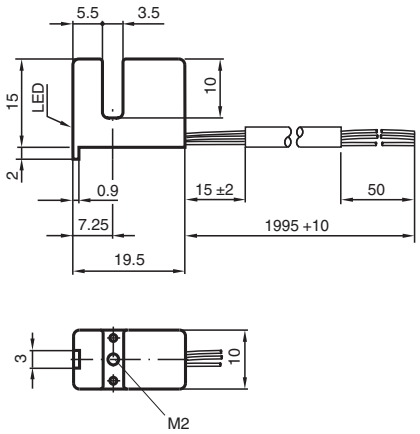

Technical Data

General specifications		
Switching function		Normally open (NO)
Output type		PNP
Slot width		3.5 mm
Depth of immersion (lateral)		5 ... 7 typ. 6 mm
Output polarity		DC
Output type		3-wire
Nominal ratings		
Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 2000 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 3 V
Operating current	I_L	0 ... 100 mA
No-load supply current	I_0	≤ 15 mA
Switching state indicator		LED, yellow
Functional safety related parameters		
$MTTF_d$		2590 a

Release date: 2025-07-14 Date of issue: 2025-07-14 Filename: 189906_eng.pdf

Technical Data

Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed Load Type: General Purpose Circuitry: Class 2 Power Source Enclosure Type Rating: Type 1 Supply/Switching Voltage: 30 V DC Output Switching Current: 100 mA
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cable
Housing material		PBT
Degree of protection		IP67
Cable		
Wire end ferrules		yes
Cable diameter		3 mm - 0.2 mm
Bending radius		> 12 x cable diameter
Material		PVC
Color		grey
Number of cores		3
Core cross section		0.14 mm²
Length	L	2 m
Dimensions		
Height		15 mm
Width		10 mm
Length		19.5 mm

Connection Assignment



Release date: 2025-07-14 Date of issue: 2025-07-14 Filename: 189906_eng.pdf