




Connectors > Contacts > Connector Contacts

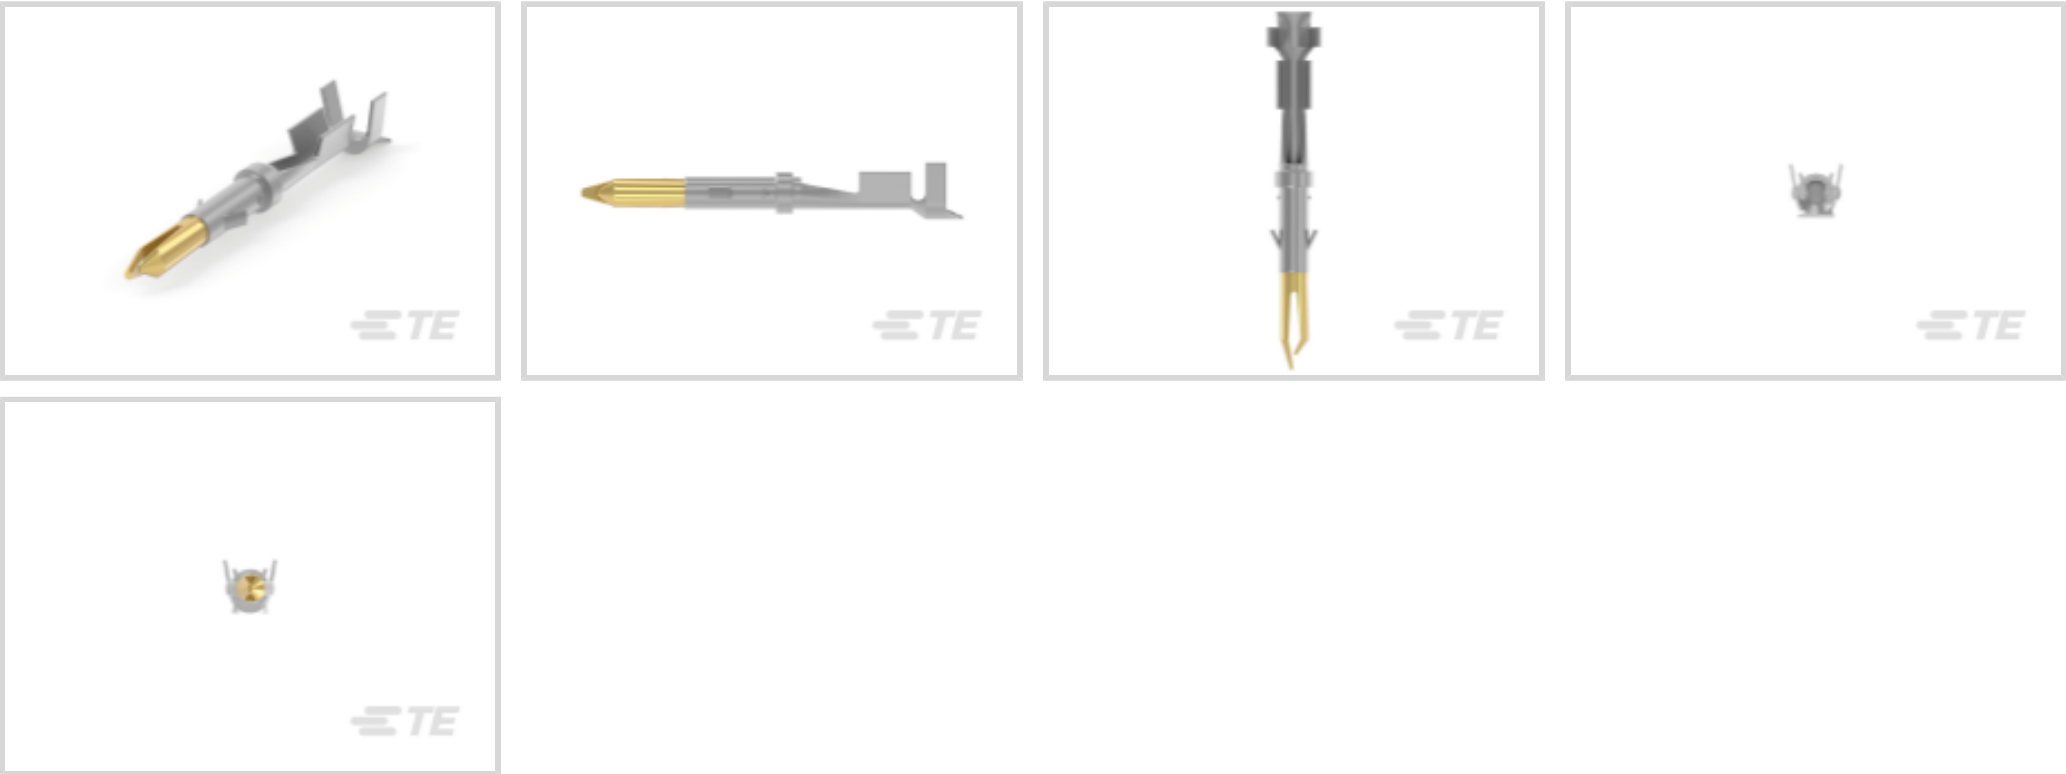

Contact Type: **Pin**
Contact Mating Area Plating Material: **Gold (Au)**
Wire Contact Termination Area Plating Material: **Nickel**
Operating Voltage: **250 VDC**

Features

Product Type Features

Discrete Wire Type	Solid or Stranded
Sealable	No

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Contact Features

Contact Fabrication	Stamped & Formed
Contact Length	19.94 mm[.785 in]
Barrel Type	Open
Contact Type	Pin
Contact Mating Area Plating Material	Gold (Au)
Wire Contact Termination Area Plating Material	Nickel
Contact Retention Within Housing	With



Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	9 A
Mating Pin Diameter	1.73 mm[.068 in]
Contact Mating Area Plating Material Thickness	.76 – .91 µm[30 – 36 µin]
Wire Contact Termination Area Plating Thickness	1.27 µm[50 µin]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Contact Retention Type Within Housing	Locking Lance
Wire Insulation Support	With

Dimensions

Wire Size	236.823 – 1578.82 CMA
Compatible Insulation Diameter Range	1.27 – 2.92 mm[.05 – .115 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Quantity	6500
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2025 (250)
Candidate List Declared Against: JUNE 2025 (250)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 91526-1
CCII MR II+ REC 26-18 ASSY

TE Part # 5-2151229-2
OCEAN-2.0-APPLICATOR-S-055F120F-RSA

TE Part # 5-2151229-1
OCEAN-2.0-APPLICATOR-S-055F120F-RSM

TE Part # 58514-2
PROCRIMP DIE MR26-18


TE Part # 58514-1
PROCRIMP TL W/DIE MR26-18

TE Part # 2063388-1
TOOL, EXTRACTION

TE Part # 2151229-2
OCEAN-2.0-APPLICATOR-S-055F120F-RSA

TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp



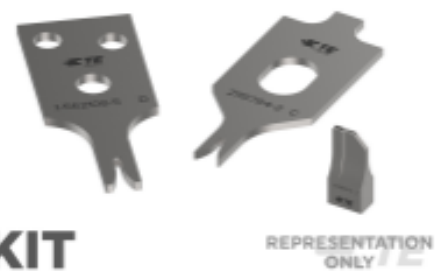

KIT

REPRESENTATION ONLY

TE Part # 7-2151229-7

[OCEAN_2.0_SPARE_PART_KIT-055F120F](#)



TE


TE Part # 2151229-1

[OCEAN-2.0-APPLICATOR-S-055F120F-RSM](#)

Also in the Series | AMP Miniature Rectangular MR



[Connector Contacts\(20\)](#)

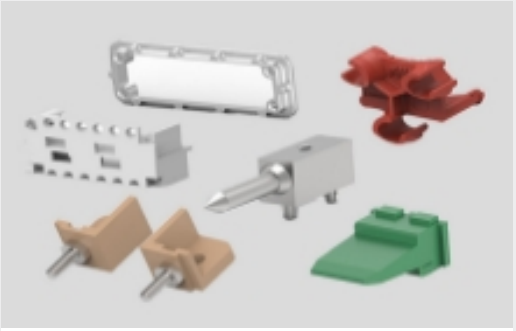

[Connector Hardware\(2\)](#)




[Power Contacts\(20\)](#)



[Rectangular Connector Housings\(20\)](#)



[Rectangular Power Connectors\(77\)](#)

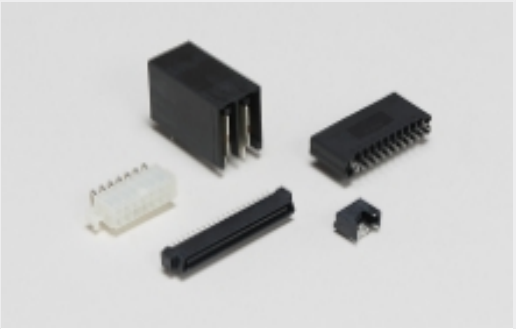

[Standard Rectangular Connectors\(20\)](#)



[Wire-to-Board Connector Assemblies & Housings\(10\)](#)

Customers Also Bought



TE

TE Part #50462-6

[SOCKET,MIN-SPR AU SER-2](#)



TE

TE Part #66106-3

[III+ PIN,26-24,15AU/FL,STRIP](#)



TE

TE Part #5-103945-4


[4X5 MTE SHRD PIN SR LATCH .100](#)



TE

TE Part #204219-1


[PIN CONTACT ASSY.](#)

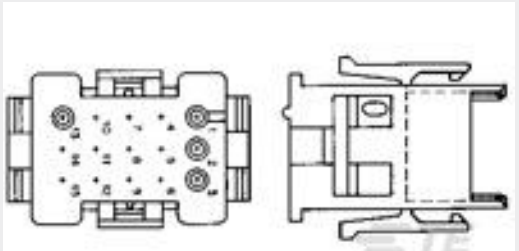

TE

TE Part #1-640510-0


[06P MR II CAP HSG V0](#)

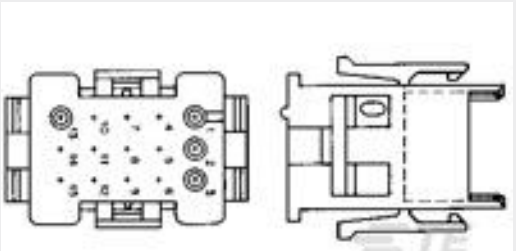

TE

TE Part #1-640514-0

[20P MR II CAP HSG V0](#)

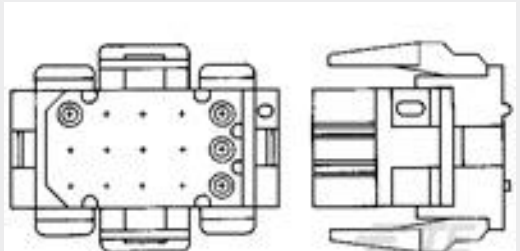

TE

TE Part #1-640519-0

[04P MR II PLUG HSG](#)



TE

TE Part #747784-8

[JACKSCREW KIT,4-40, BULK](#)



Documents

Product Drawings

MR PIN AU/PHBZ

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_350967-2_L.2d_dxf.zip

English

Customer View Model

ENG_CVM_350967-2_L.3d_igs.zip

English

Customer View Model

ENG_CVM_350967-2_L.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_350967-2_AA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_350967-2_AA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_350967-2_AA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

350967-2

Gold (Au), Pin Contact, 26 – 18 AWG, 250 VAC, 250 VDC, .12 – .8 mm² Wire, Locking
Lance Contact Retention, AMP Miniature Rectangular MR

