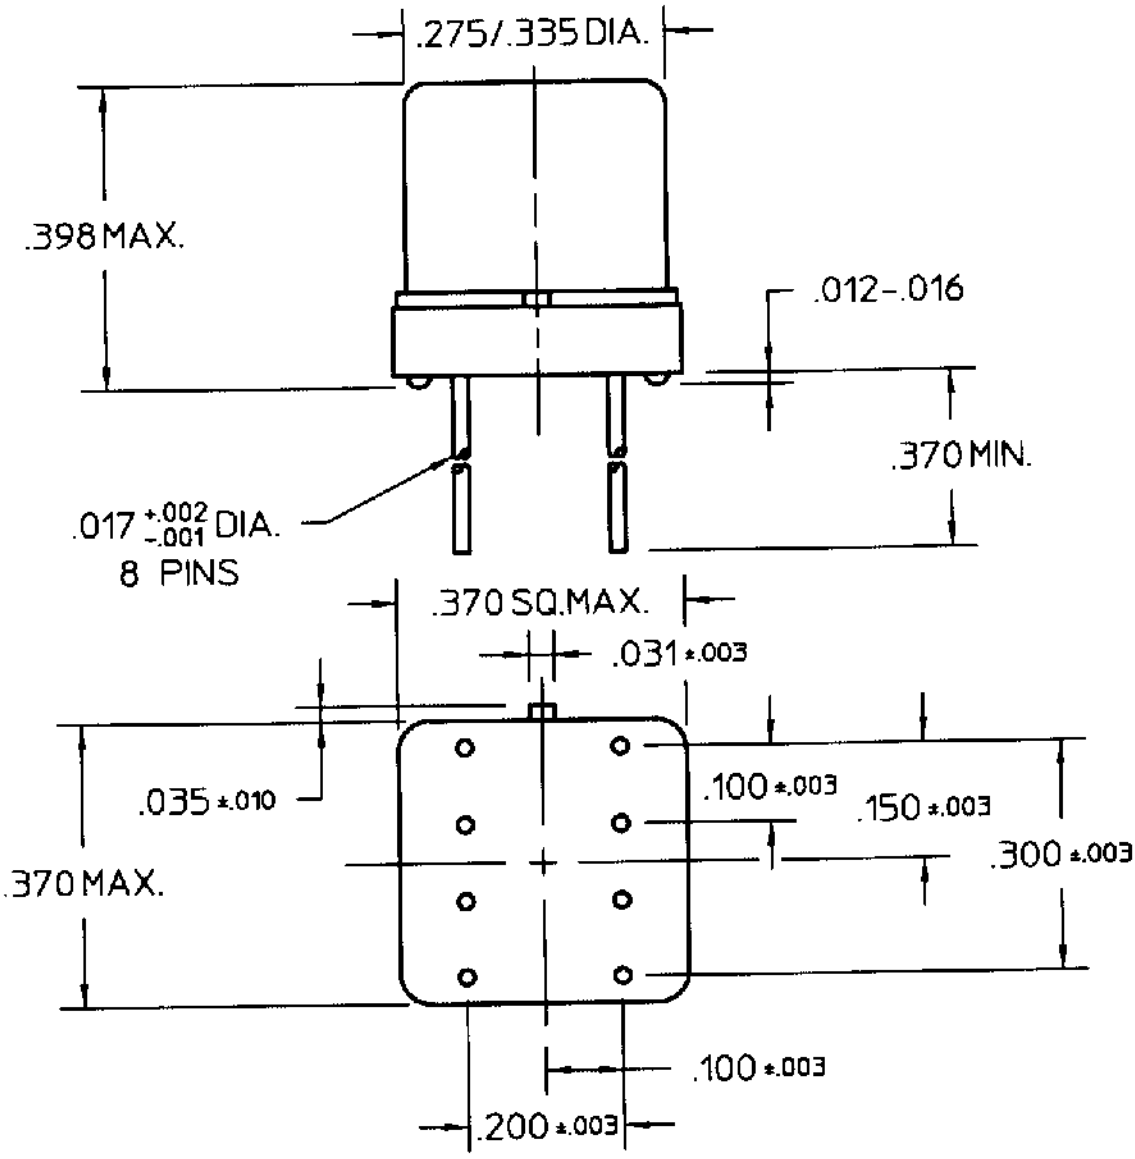



COIL: @ 25°C

RESISTANCE 2000 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE VOLTAGE 14.4 VDC

TURN-ON BASE CURRENT 0.10 mADC

MUST RELEASE 8.0 VDC MAX, 1.25 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 2.0 MS MAX
TURN-OFF TIME 7.5 MS MAX
CONTACT STABILIZATION TIME 2.0 MS MAX

## CUSTOMER DATA SHEET




CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 7/23/98 CK CBPM 7/23/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M28776/5-036P

TYPE J1MAT RELAY

# J1MACT-26XPS