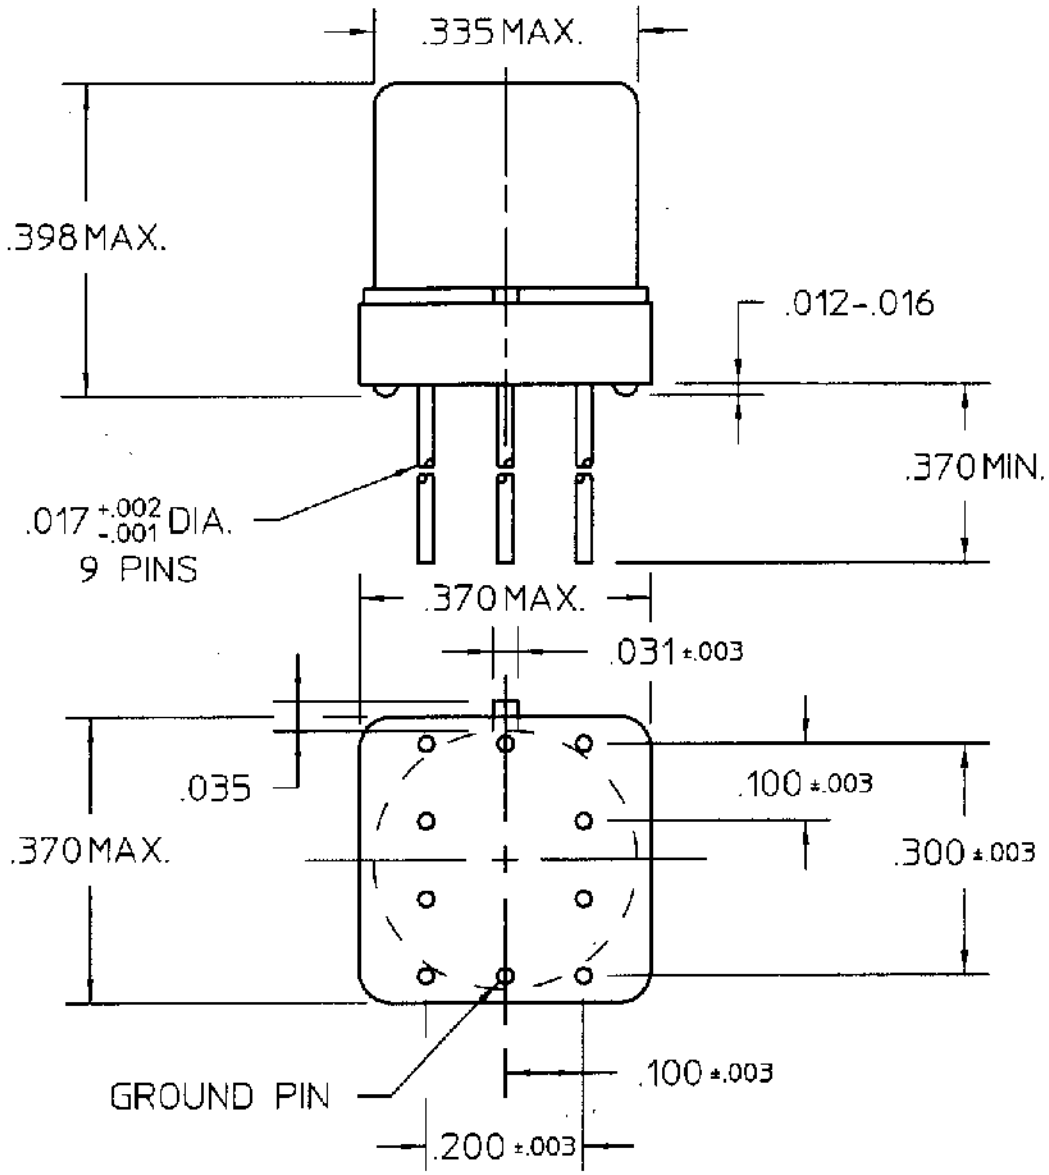


REV. 0
DCO 142639

COIL: @ 25°C

RESISTANCE 1560 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.2 VDC

MUST RELEASE 8.0 VDC MAX. 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2 MS MAX
RELEASE TIME 1.5 MS MAX
CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 1/18/01 CK. VJ 9/6 MS

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/9-104P REV.

JMA RELAY

JMACG-26XPS