
# DIN-Rail Mounting Enclosure Module for Snap-In Keystone Jacks and Couplers, Left Cover, TAA

MODEL NUMBER: **N063-001-ENC-K1**

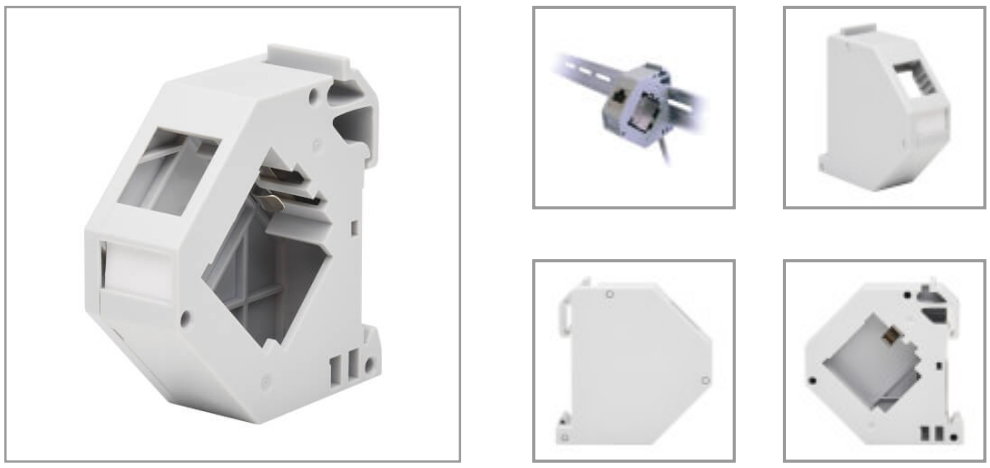

Accepts a snap-in keystone jack or coupler to help you manage your industrial DIN-rail network cable application.

### Highlights

- Durable plastic construction recommended for industrial Ethernet network applications
- Front blank cutout compatible with all keystone jacks and couplers
- Plastic left cover and grounding contact spring help protect interior cable connection
- Built-in mounting clip attaches easily to standard 35 mm DIN rail with no tools needed
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

### Package Includes

N063-001-ENC-K1 DIN-Rail Mounting Enclosure Module

### Features

**Organizes Ethernet Network Patch Cables in Your Industrial DIN-Rail Installation**
This DIN-rail mounting module lets you manage network cable interconnectivity with one blank cutout, which accommodates all snap-in keystone jacks and in-line couplers. Made from durable plastic with a phosphor bronze grounding spring, the N063-001-ENC-K1 is quick and easy to install on a standard 35-millimeter DIN rail using the built-in mounting clip.

**Easy to Install in Rugged Industrial Applications**
The N063-001-ENC-K1 is designed to allow side-by-side mounting for network applications. The plastic left cover protects the interior jack and cabling from harsh conditions. A designation label is included to help you identify the connection at a glance.

**TAA-Compliant for GSA Schedule Purchases**
The N063-001-ENC-K1 is compliant with the Federal Trade Agreements Act (TAA), which makes it eligible for GSA (General Services Administration) Schedule and other federal procurement contracts.

## Specifications

| | |
|---|---|
| **OVERVIEW** | |
| UPC Code | 037332276902 |
| Technology | Cat5/5e; Cat6; Cat6a |
| **Firmware / Software Docs** | |
| Offset Ports | No |
| **CONNECTIONS** | |
| Number of Ports | 1 |

| | |
|---|---|
| Side A - Connector 1 | KEYSTONE JACK CUTOUT |
| **PHYSICAL** | |
| Primary Form Factor | DIN-Rail |
| Color | Gray |
| Material of Construction | Housing/Removable Enclosure Cover: PC FRV2 Plastic, Spring: Phosphor Bronze |
| Total Number of Ports | 1 |
| Shipping Dimensions (hwd / in.) | 7.87 x 4.33 x 0.50 |
| Shipping Weight (lbs.) | 0.05 |
| Unit Dimensions (hwd / in.) | 2.320 x 2.390 x 0.850 |
| **ENVIRONMENTAL** | |
| Operating Temperature Range | -13° to 122°F (-25° to 50°C) |
| Storage Temperature Range | -40° to 158°F (-40° to 70°C) |
| Operating Humidity Range | 10% to 85% RH, Non-Condensing |
| Storage Humidity Range | 10% to 85% RH, (Non-Condensing) |
| **FEATURES & SPECIFICATIONS** | |
| All-in-One Kit | No |
| Antibacterial | No |
| IP68 Rated | No |
| IP20 Rated | No |
| Numbered Ports | No |
| DIN Mountable | Yes |
| Keystone Jacks | Yes |
| Built-in Cables | No |
| Color-Coded Connections | No |
| EIA/TIA 2/32 Spacing | No |
| Labeled Ports | Yes |
| Down-Angled Ports | No |
| Panel Applications | Ethernet |
| **STANDARDS & COMPLIANCE** | |
| Product Compliance | CE (Europe); REACH; RoHS; UKCA; Trade Agreements Act (TAA) |
| **WARRANTY & SUPPORT** | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

1000 Eaton Boulevard
Cleveland, OH 44122
United States
https://tripplite.eaton.com

© 2024 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.