
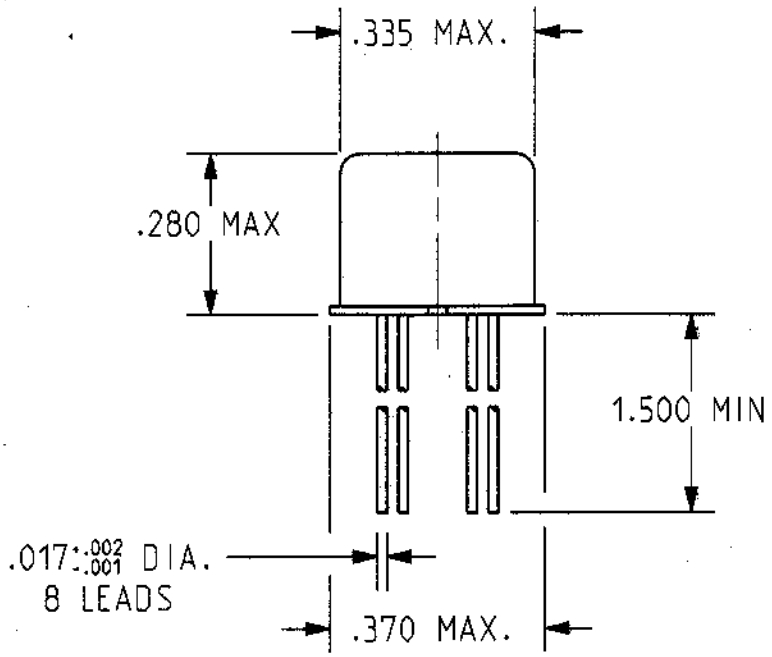


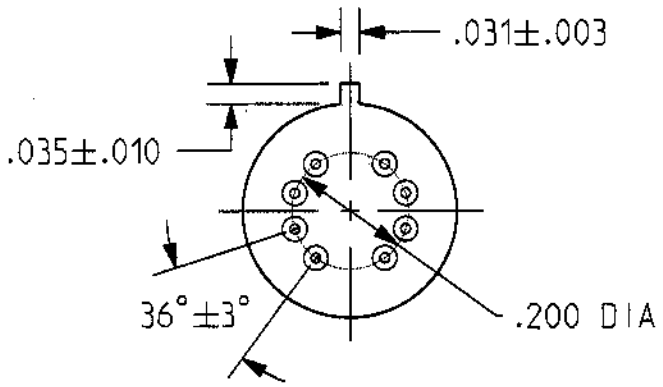

REV. 0

DCO 143545

COIL: @ 25°C

RESISTANCE	63 OHMS ±10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	3.0 VDC
	TURN-ON BASE CURRENT 0.60 mADC
MUST RELEASE	1.7 VDC MAX. 0.24 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 2.0 MS MAX.

TURN-OFF TIME 7.5 MS MAX.

CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 06MAY02 CK 5/6/02

CII Technologies
advanced control electronic solutions

CUST. QPL

CUST. NO. M28776/5-013L REV.

"J1MAT" RELAY

J1MAW T-5XL

F-718 REV. 3