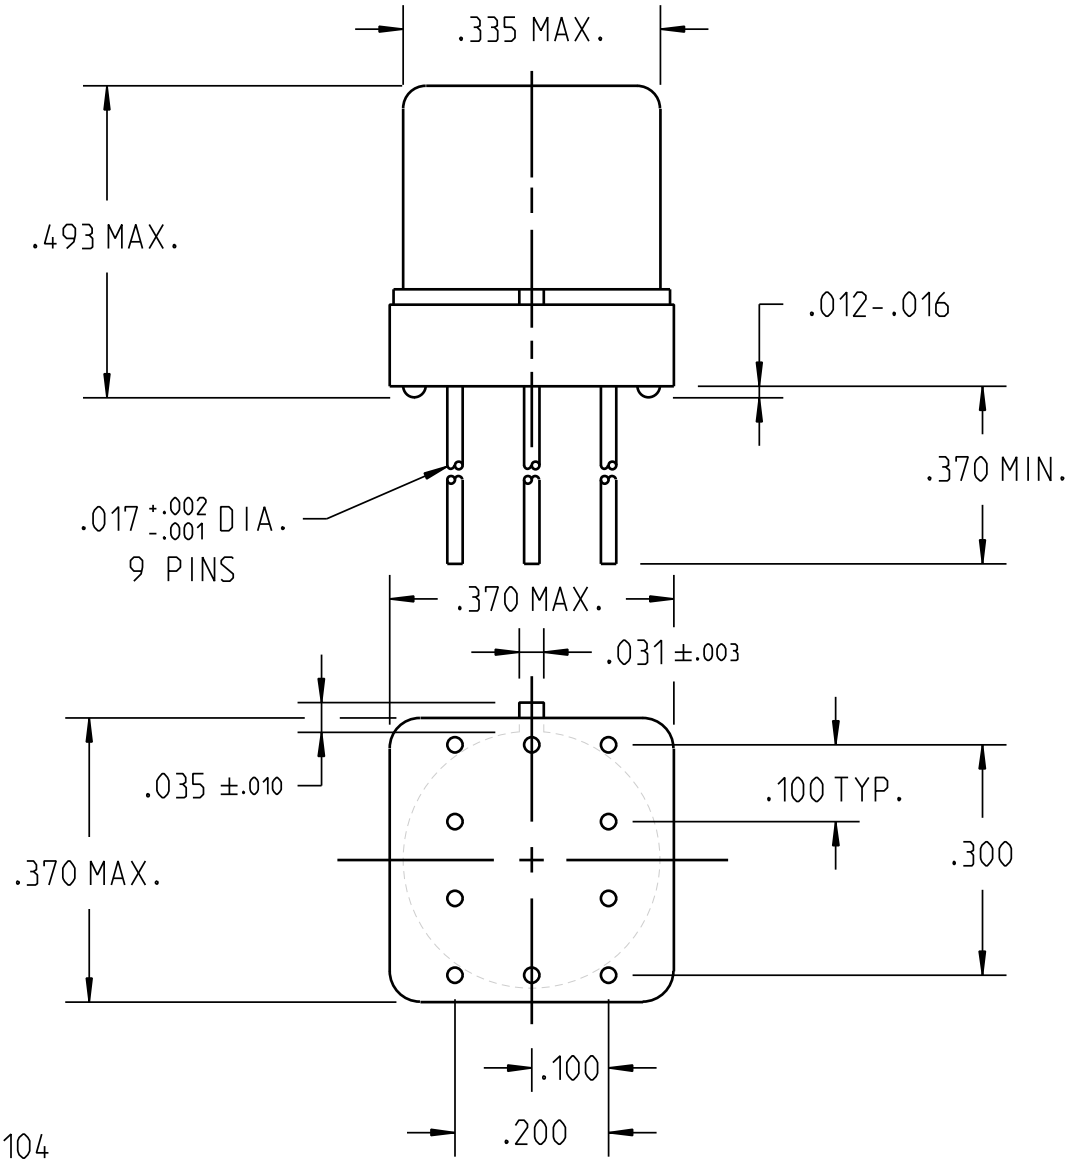


REV. 0
DCO 144104

COIL: @ 25°C

RESISTANCE 100 OHMS ±10%

NOMINAL VOLTAGE 5 VDC

MUST OPERATE 2.8 VDC

TURN-ON BASE (CURRENT) .37 mADC

MUST RELEASE 1.4 VDC MAX, 0.22 MIN

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 4.0 MS MAX

TURN-OFF TIME 7.5 MS MAX

CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 17OCT05 | CK. JERRY C 10/17/05

CII Technologies™
advanced control electronic solutions

CUST. QPL

CUST. NO. M28776/3-041L REV.

"JMST" RELAY

JMSCT-5XLS