



© 2025 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	10MAR2015	GY	CW
	B	ECR-15-017607	03DEC2015	GY	CW
	C	ECR-21-117384	08NOV2021	WQR	CW
	D	ECR-25-237617	09JUN2025	ABS	RB

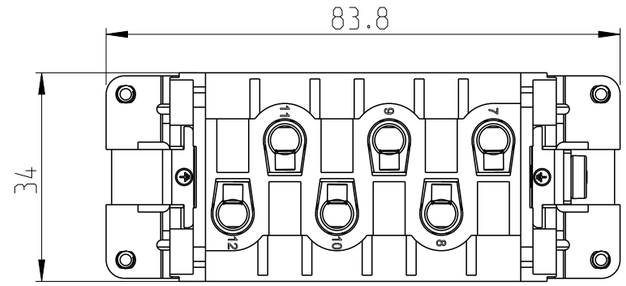


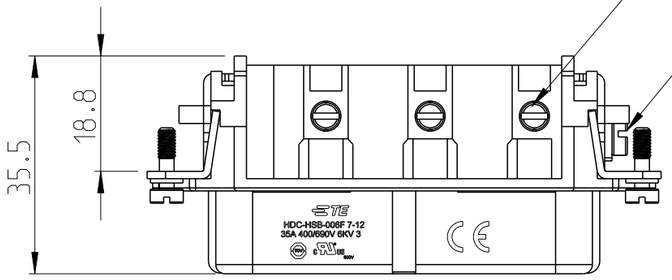



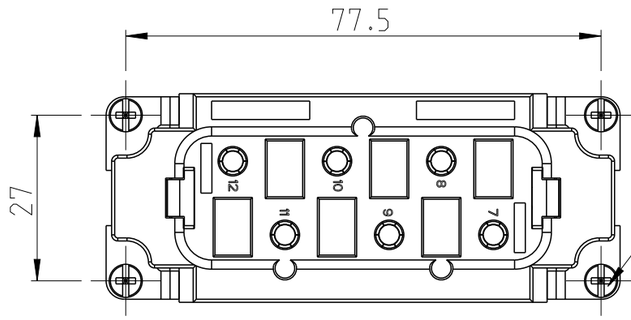

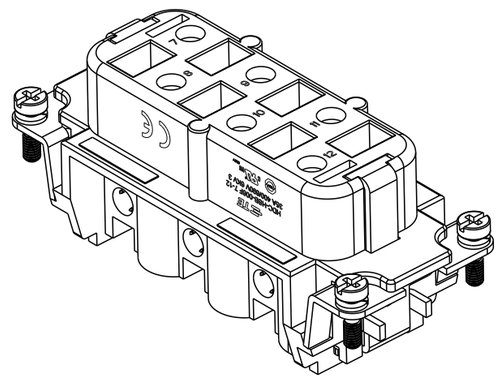

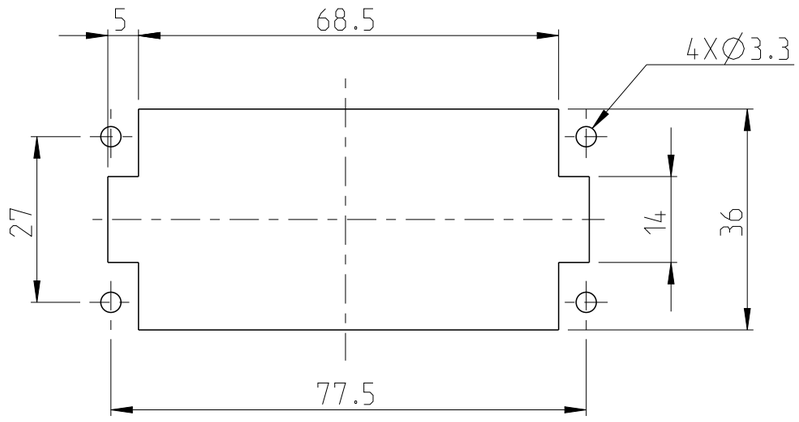

Panel cut out for inserts for using without hoods/housings

NOTES:

1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC(Gray)
   RATED VOLTAGE: CONDUCTOR-GROUND: 400V
   CONDUCTOR-CONDUCTOR: 690V
   RATED CURRENT: 35A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 6KV
   POLLUTION DEGREE: 3
   CONTACT RESISTANCE: <=5mΩ
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500
   OPERATION TEMPERATURE: -40°C~+125°C
   WIRE RANGE: 1.5mm²~6.0mm² (AWG16-AWG10)
   CONTACT FINISH: SILVER PLATED
   CONTACT TYPE: SCREW CLAMP (M4)

注释：

1. 技术参数：
   绝缘材料：PC(Gray)
   额定电压：导体-地：400V
   导体-导体：690V
   额定电流：35A
   绝缘电阻：>=400MΩ
   脉冲电压：6KV
   污染等级：3
   接触电阻：<=5 mΩ
   阻燃等级：UL94V-0
   插拔次数：500
   工作温度：-40°C~+125°C
   接线范围：1.5mm²~6.0mm² (AWG16-AWG10)
   端子表面处理：镀银
   接线类型：螺丝压接 (M4)

HSB-006-F 7-12	T2060122201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: - / -

FINISH: - / -

DWN	Gino.Yao	10Mar2015
CHK	Chris.Wang	10Mar2015
APVD	Xiang.Xu	10Mar2015
PRODUCT SPEC	108-137052	
APPLICATION SPEC	114-137052	
WEIGHT	-	

TE Connectivity

NAME: HSB-006-F 7-12

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-T2060122201000	-

CUSTOMER DRAWING

SCALE 1:1 | SHEET 1 OF 1 | REV D

1470-19 (3/13)