

© TE Connectivity All Rights Reserved.
VERTRAULICHE UNVERÖFFENTLICHTE ZEICHNUNG
FREI FUER VEROEFFENTLICHUNG
ALLE RECHTE VORBEHALTEN


MATED WITH:
PASSEND ZU:
HE

REVISIONS
AENDERUNGEN

| P | LTR | DESCRIPTION BESCHREIBUNG | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | C15 | REVISED PER ECR-25-242931 | 29APR2025 | RK | WR |

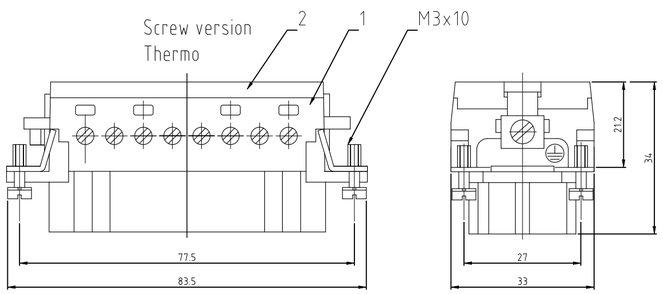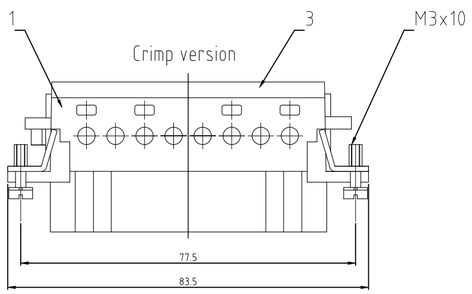




Contact arrangement view from termination side

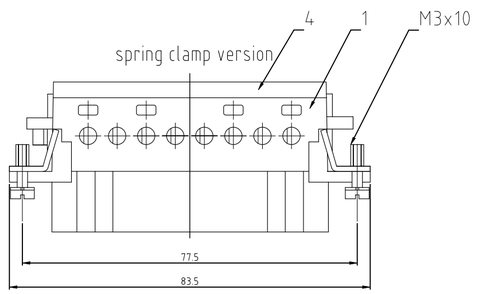Printing 1-16 Thermo





Contact arrangement view from termination side

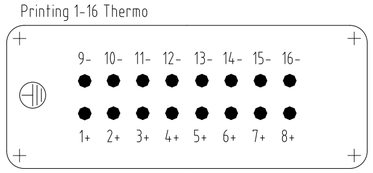Printing 1-16

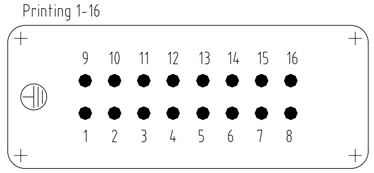



Contact arrangement view from termination side

Printing 1-16

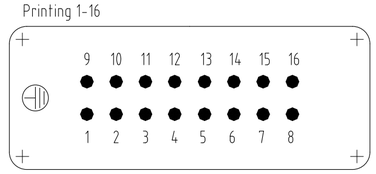



assembly directions





×distance for a safe contact max: max: 21 mm


Printing 1-16 Screew

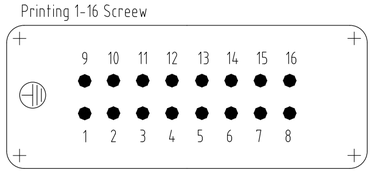


Printing 17-32

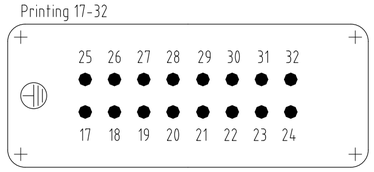


Printing 17-32

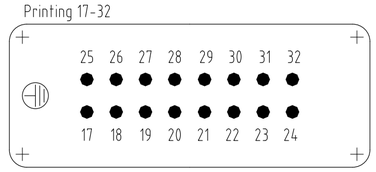


NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM

2 SUITABLE HOOD SIZE 6; 10; SERIES HB; HD;HIP;EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264


3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

4 STANDARDS:
DIN EN 61984; DIN EN 60664-1


5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 200 PIECES


Printing 1-16 Thermo

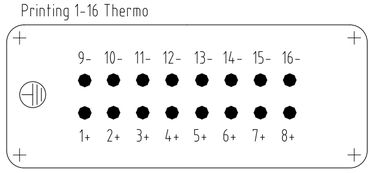


Printing 8+4+4 Screw/Thermo

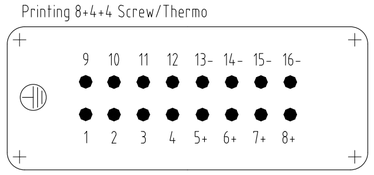


Panel cut-out for contact insert when used without housing

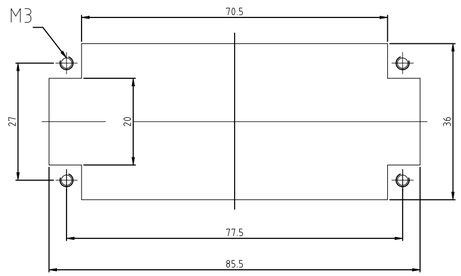


| | | |