
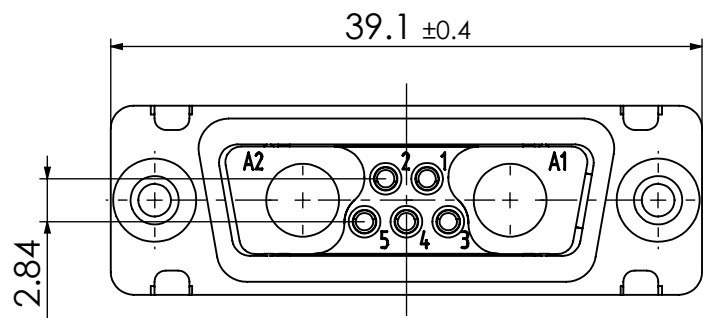
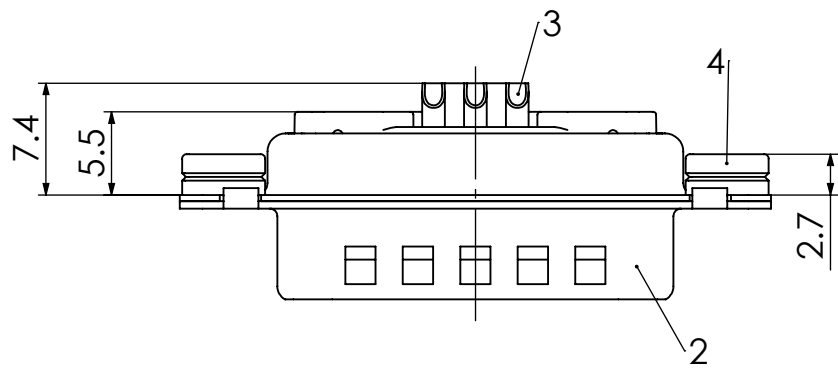
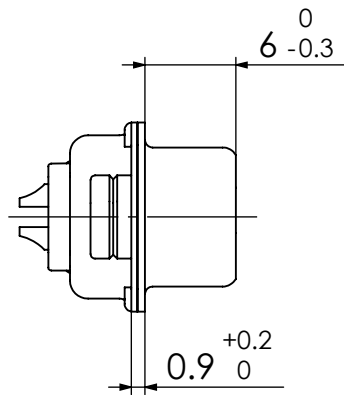


RoHS compliant
by exemption

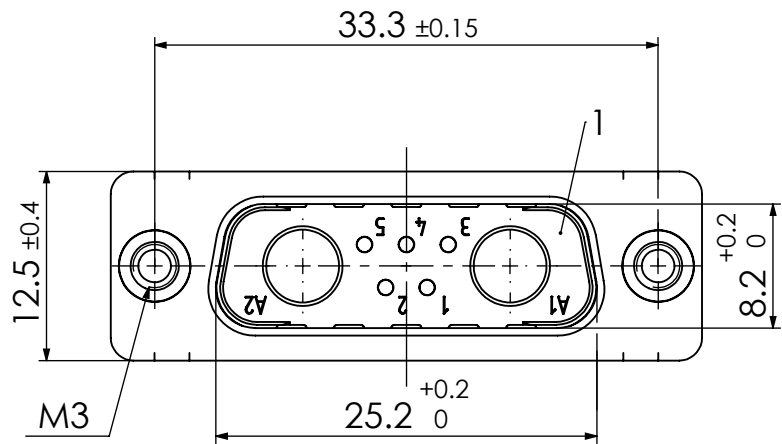

4	2	Clinch nut	FZ M3 / Steel	tin plated
3	5	Signal contact	P0 / Brass	0.8µm Au / AWG 20
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS  = 0  = 0  = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex FCT D-Sub Mixed-Layout Connector				
					CURRENT REVISION							
					DRWN: DRAWN BY msteinbrueck 11-09-2023							
				APPR: APPR BY mteubel 15-09-2023								
					INITIAL REVISION			PRODUCT CUSTOMER DRAWING				
	2		24410					MATERIAL NUMBER			REV.	
	1				DRWN: DRAWN BY Markus.Jobst 09-09-2009			1731070573			2	
	REV.		CH.-NO.		APPR: APPR BY birgit.rinder 10-09-2009							
REPLACEMENT FOR: 1731070573_Rev. A1			FIRST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FMZ7W2P-K120		CUSTOMER GENERAL MARKET	SH. NUM. 1		

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.