


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

| LOC | DIST | REVISIONS |     |                       |         |     |
|-----|------|-----------|-----|-----------------------|---------|-----|
| G   | 14   | P         | LTR | DESCRIPTION           | DATE    | DWN |
|     |      | B         |     | REV PER ECR 10-003079 | 03MAR10 | JR  |

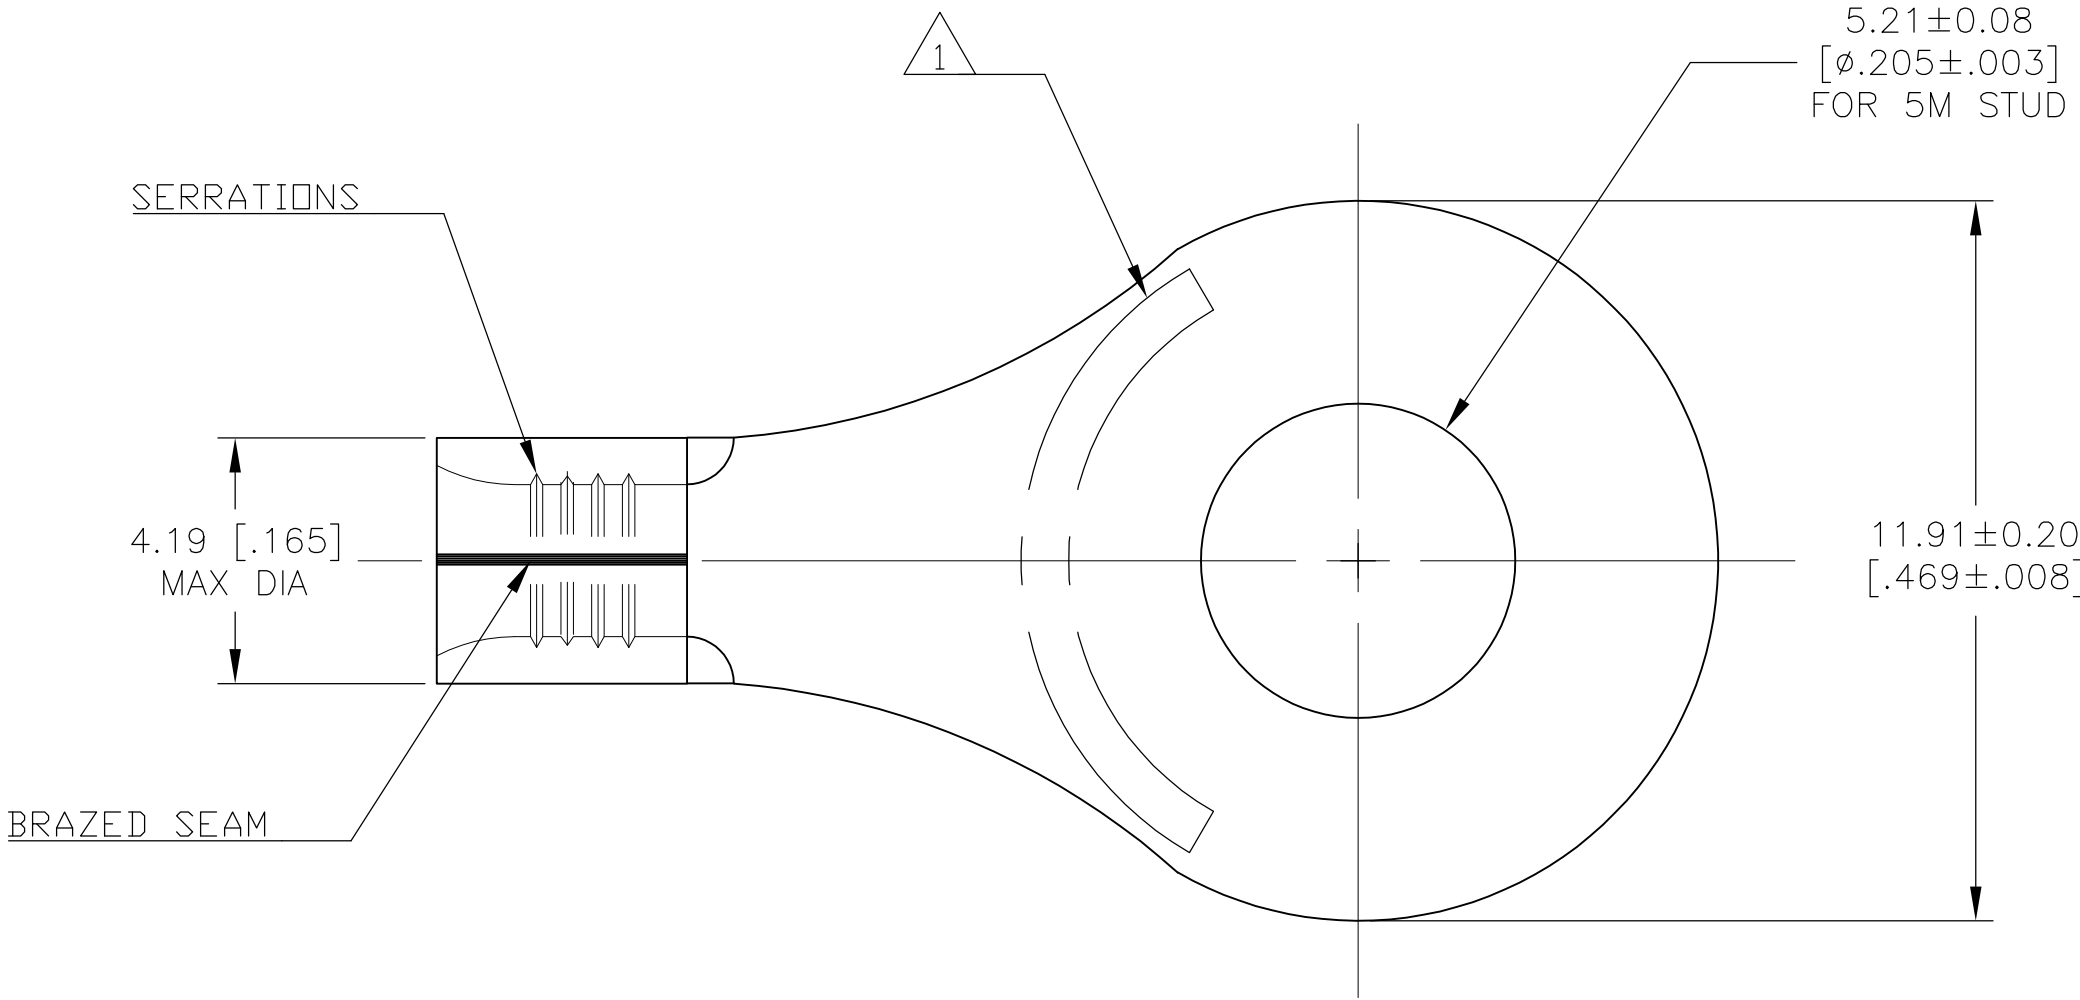

|                                |                                |                                |
|--------------------------------|--------------------------------|--------------------------------|
| <b>AMP</b><br>WIRE RANGE       | Listed<br>FILE E13288          | LR7189<br>Certified            |
| 16-14 AWG<br>SOLID OR STRANDED | 16-14 AWG<br>SOLID OR STRANDED | 16-14 AWG<br>SOLID OR STRANDED |

- 1 STAMP AMP 16-14\* APPROX AS SHOWN
- 2 0.00254 [.000100] MIN TIN PER ASTM B-545.

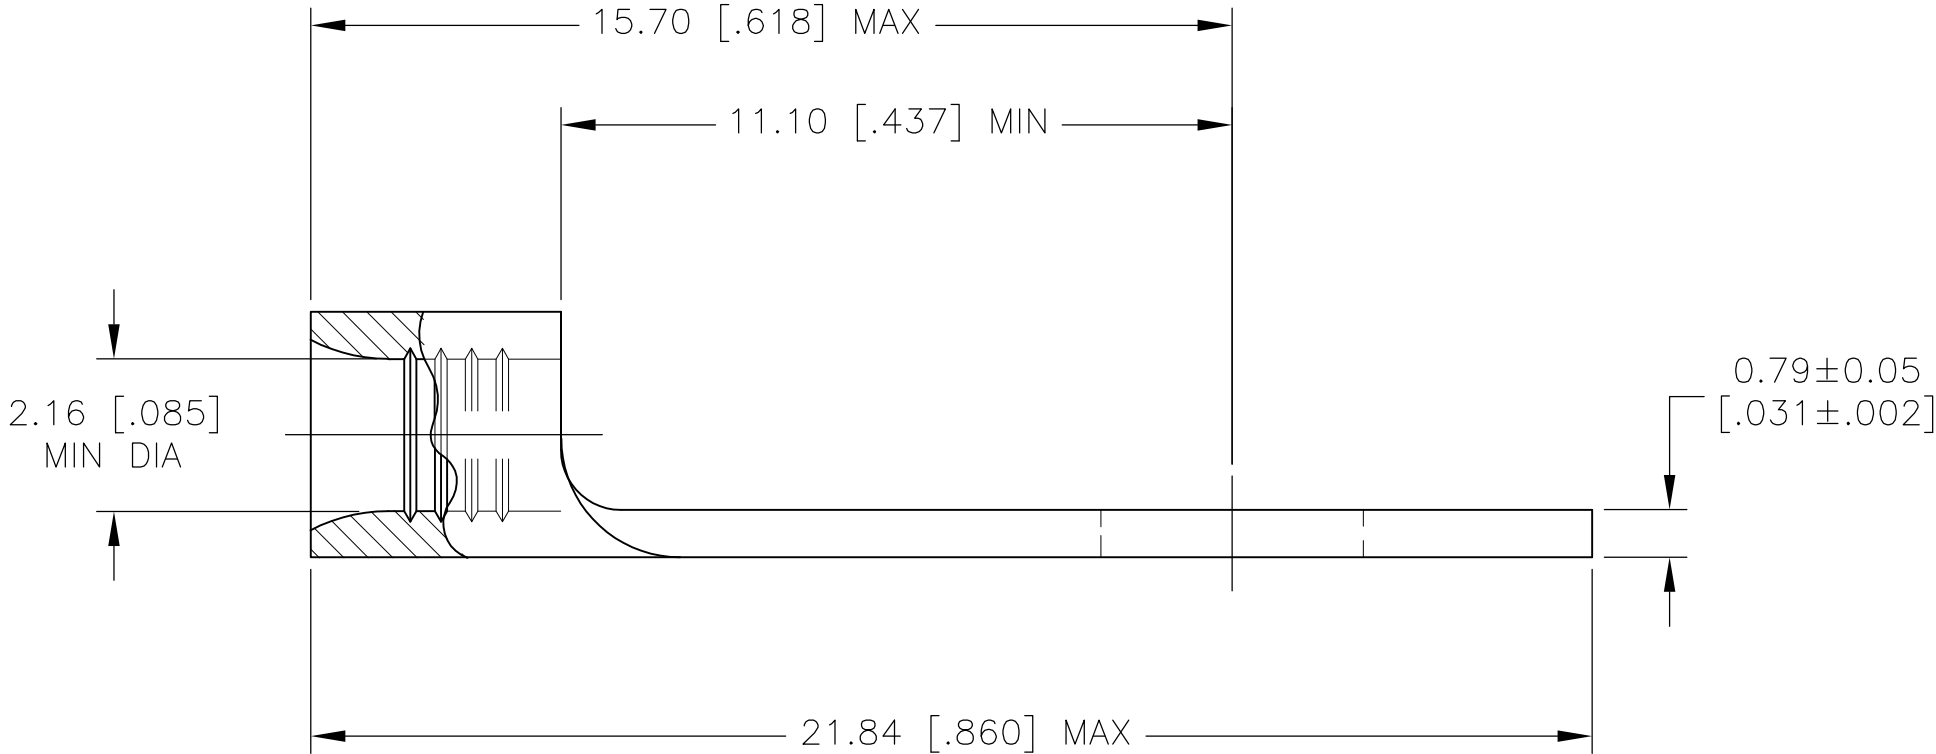

|        |      |                |            |
|--------|------|----------------|------------|
| 2      | 5000 | ON TAPE        | 2-130128-1 |
| 2      | 1000 | LOOSE PIECE    | 130128     |
| FINISH | QTY  | PACKAGING TYPE | PART NO.   |

|                                                                                  |  |                                              |                                                              |                                                                                                                                                                               |                                        |                                                                                       |  |                                                                                                                                                                                     |  |                                                           |  |                    |  |                        |  |
|----------------------------------------------------------------------------------|--|----------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|---------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------|--|--------------------|--|------------------------|--|
| AMP INCORPORATED<br>CUSTOMER SERVICE SYSTEMS                                     |  |                                              | MAX RECOMMENDED OPERATING TEMPERATURE:<br><br>105°C [221° F] |                                                                                                                                                                               | THIS DRAWING IS A CONTROLLED DOCUMENT. |                                                                                       |  | DWN<br>JR RUTH<br>03MAR10<br>CHK<br>TOM MICHELUTTI<br>03MAR10<br>APVD<br>TOM MICHELUTTI<br>03MAR10<br>PRODUCT SPEC<br>—<br>APPLICATION SPEC<br>—<br>WEIGHT<br>—<br>CUSTOMER DRAWING |  | Tyco Electronics Corporation<br>Harrisburg, PA 17105-3608 |  |                    |  |                        |  |
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS |  | PRODUCT INFORMATION CENTER<br>1-800-522-6752 |                                                              | VOLTAGE RATING:<br>600V MAX<br>(1000V FIXTURE OR SIGN)                                                                                                                        |                                        |  |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ± —<br>1 PLC ± —<br>2 PLC ± 0.20 [.008]<br>3 PLC ± —<br>4 PLC ± —<br>ANGLES ± ±                                                     |  | NAME<br><br>TERMINAL, RING<br>TONGUE, SOLISTRAND<br>—     |  |                    |  |                        |  |
| FOR APPLICATION TOOLING INFORMATION                                              |  | TOOLING ASSISTANCE CENTER<br>1-800-722-1111  |                                                              | CIRCULAR MIL AREA:<br>1.04-2.62mm² [2,050-5,180]<br>SOLID OR STRANDED                                                                                                         |                                        |                                                                                       |  |                                                                                                                                                                                     |  | SIZE<br>A2                                                |  | CAGE CODE<br>00779 |  | DRAWING NO<br>C=130128 |  |
| FOR ORDER ENTRY                                                                  |  | 1-800-526-5142                               |                                                              | THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. |                                        | MATERIAL<br>COPPER PER ASTM B-152<br>ANNEALED                                         |  | FINISH<br>SEE TABLE                                                                                                                                                                 |  | SCALE<br>8:1                                              |  | SHEET<br>1 of 1    |  | REV<br>B               |  |