
DRAWING MADE IN THIRD ANGLE PROJECTION

3	2	1	5016	LOC DF	DIST BO

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , 19 .

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

REVISIONS						
P	F	ZONE	LTR	DESCRIPTION	DATE	APPROVED
✓	✓		L	REDRAWN & REVISED PER ECN R-1451	9-30-85	RER
✓	✓		M	REV. /ECN R-1946	3-4-86	MAN SLB
✓	✓		N	OBSOLETED - 3 PER R-2760	4-4-88	SLB
✓	✓		P	REV PER ECN DF-5920	11-25-92	SL
✓	✓		R	ADD -5 PER NPR 0600-4462-965 B	10-595	
✓	✓		S	REV PER DH14-0241-05	04-05	AA/DE

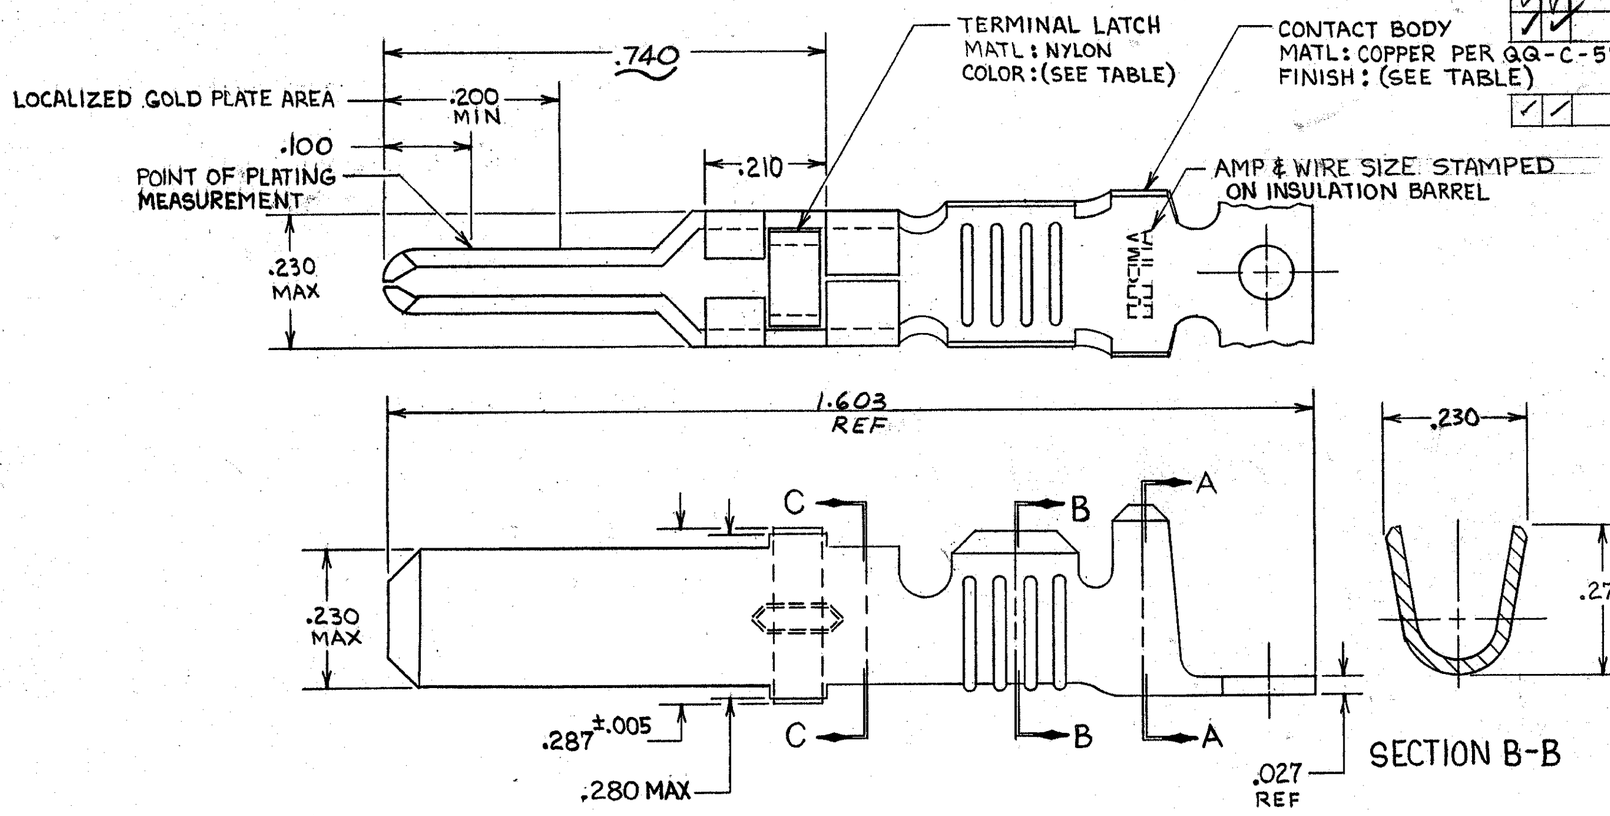

⚠1 REELED FOR USE WITH STANDARD APPLICATORS.

⚠2 PLATED WITH .000100 MIN SILVER PER QQ-S-365.

⚠3 PLATED WITH .000015 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.

⚠4 PLATED WITH .000030 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.

⚠5 PLATED WITH .000050 MIN 93-7% TIN-LEAD ALLOY OVER .000030 MIN NICKEL PER QQ-N-290.

6. WIRE RANGE = 10 AWG.

7. INSULATION RANGE = .190 - .220 DIA.

⚠6 REELED FOR USE WITH QUICK-CHANGE APPLICATOR.

⚠5 PLATED WITH .000050 MIN TIN PER ASTM-B-545 OVER .000030 MIN NICKEL PER QQ-N-290.

TERMINAL LATCH COLOR	FINISH	L.P. ASS'Y P/N REF	STRIP ASS'Y P/N
BLACK	⚠3	66260-5	66254-6 ⚠1
BLACK	⚠4	66260-2	66254-5 ⚠2
NATURAL	⚠2	66260-4	66254-4 ⚠1
BLACK	⚠3	OBSOLETE	66254-3 ⚠1
BLACK	⚠4	66260-2	66254-2 ⚠1
BLACK	⚠5	66260-1	66254-1 ⚠1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCES ON:
DECIMALS ±.010
ANGLES ±

MATERIAL: SEE CALLOUT

FINISH: SEE DASH NO

CONTRACT NO

DR Rick Robelbaugh 9-30-85

CHK Larry G. Lawver 10-25-85

APPD S.L. Black 10-25-85

APPD Dennis E. Smith 10-28-85

DSGN APPD

OTHER APPD

AMP | AMP INCORPORATED Harrisburg, Pa. 17105

NAME: MALE TYPE XII GROUND CONTACT STRIP ASSEMBLY

SIZE	FSCM NO	DRAWING NO
C	00779	66254

SCALE NTS SHEET

66254

CUSTOMER DRAWING

AMP 1471-6 REV 2-81