

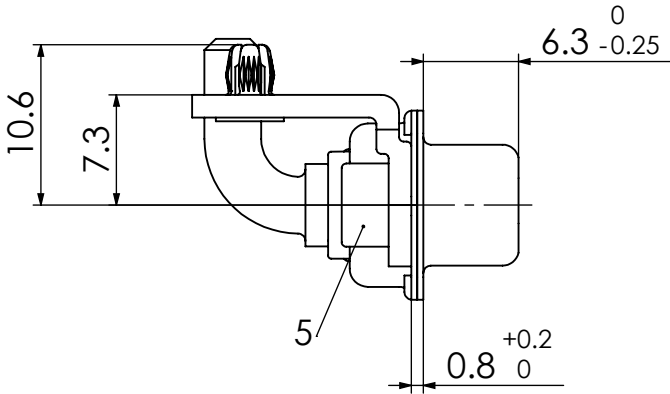
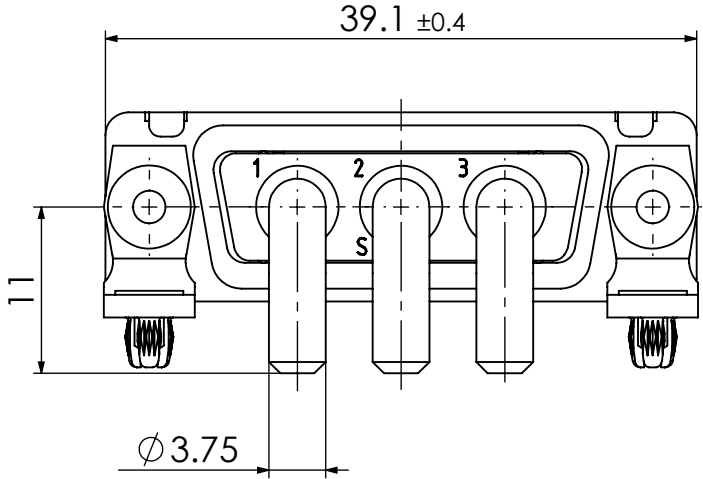
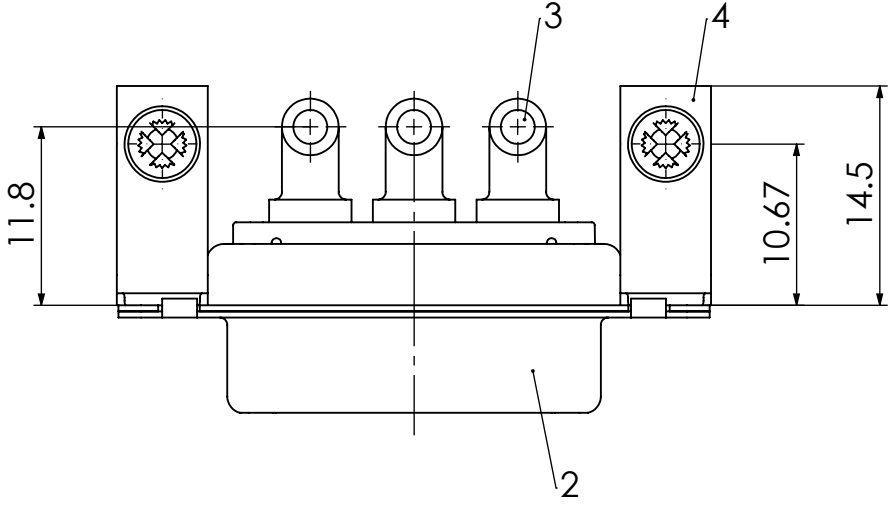


RoHS compliant by exemption

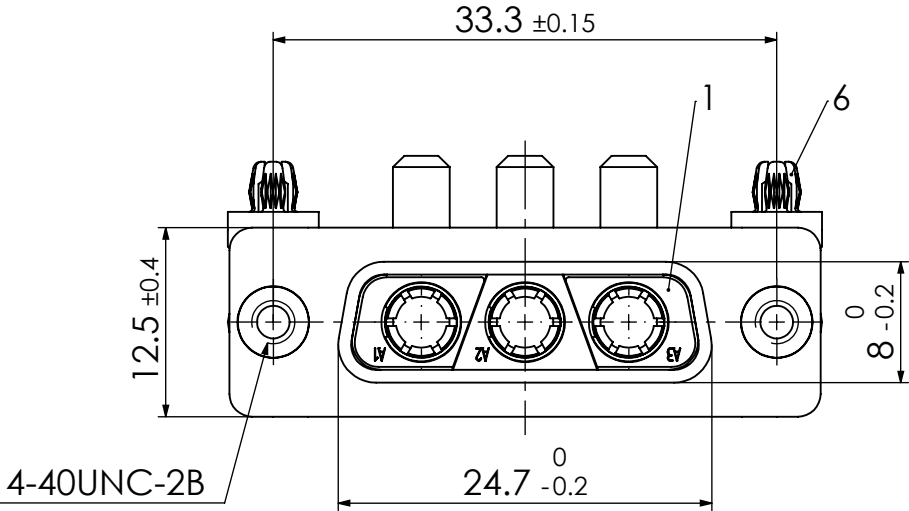

PCB hole pattern, mounting side

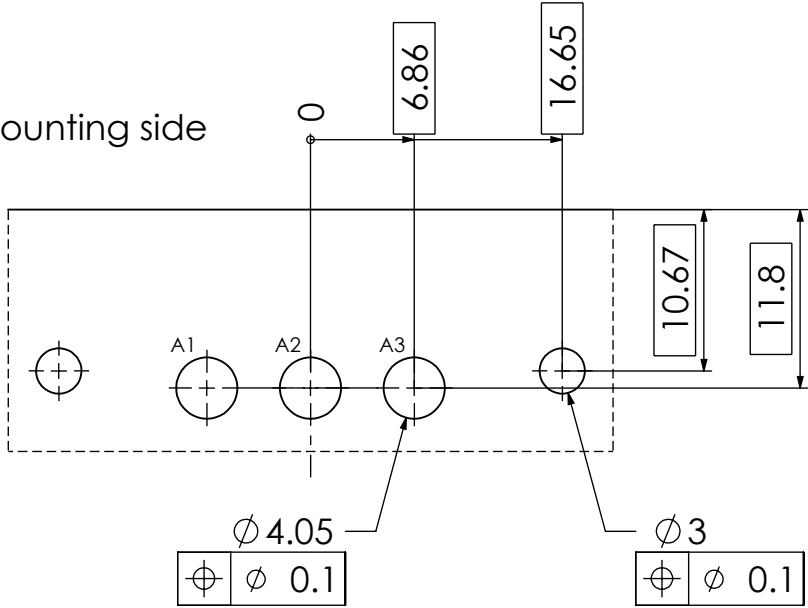

6	2	Snap-in rivet	PCB 1.6mm / Brass	tin plated
5	2	Clinch nut	MW 4-40 / Steel	tin plated
4	2	Bracket	F1080-13B / Steel	tin plated
3	3	High power contact	FMP009S104R	40A
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	black
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS ▽ E = 0 ▽ E = 0 ▽ E = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex		
					CURRENT REVISION					
					DRWN: DRAWN BY msteinbrueck 21-09-2023			FCT D-Sub Mixed-Layout Connector		
					APPR: APPR BY mteubel 29-11-2023					
					INITIAL REVISION			PRODUCT CUSTOMER DRAWING		
	2 24410					MATERIAL NUMBER 1731070810			REVISION 2	
	1									
	REV. CH.-NO.		APPR: APPR BY ssschref 19-10-2015							
REPLACEMENT FOR: 1731070810_Rev. A1		FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER F3W3SC-5821		CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1	

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY, AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.