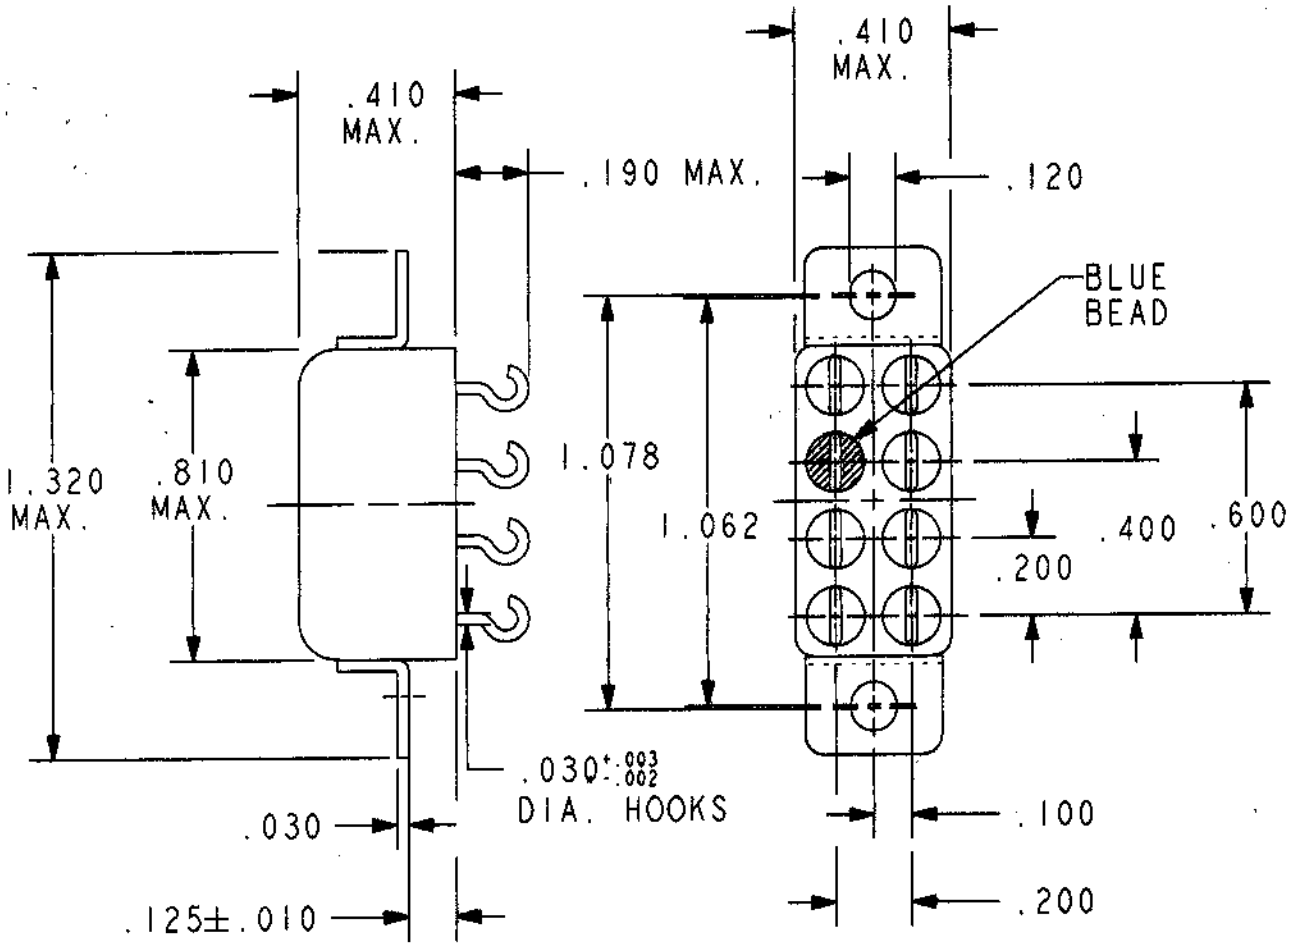


REV. 0

DCO 17465

COIL: @ 25°C

RESISTANCE 320 OHMS ±10%

NOMINAL VOLTAGE 12-15 VDC

MUST OPERATE 6.8 VDC

MUST RELEASE 0.68 VDC

ENVIRONMENT:


VIBRATION 10 Hz TO 2000 Hz @ 20 g's

SHOCK 100 g's 6 ±1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 30 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 1/7/02 CK TG 1-7-02

CII Technologies
advanced control electronic solutions

CUST. C.I.I.

CUST. NO. STD. REV.

"HFW" RELAY

HFW1130B00

F-718 REV. 4