
© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-24-213594	03JUL2024	RK	FJS

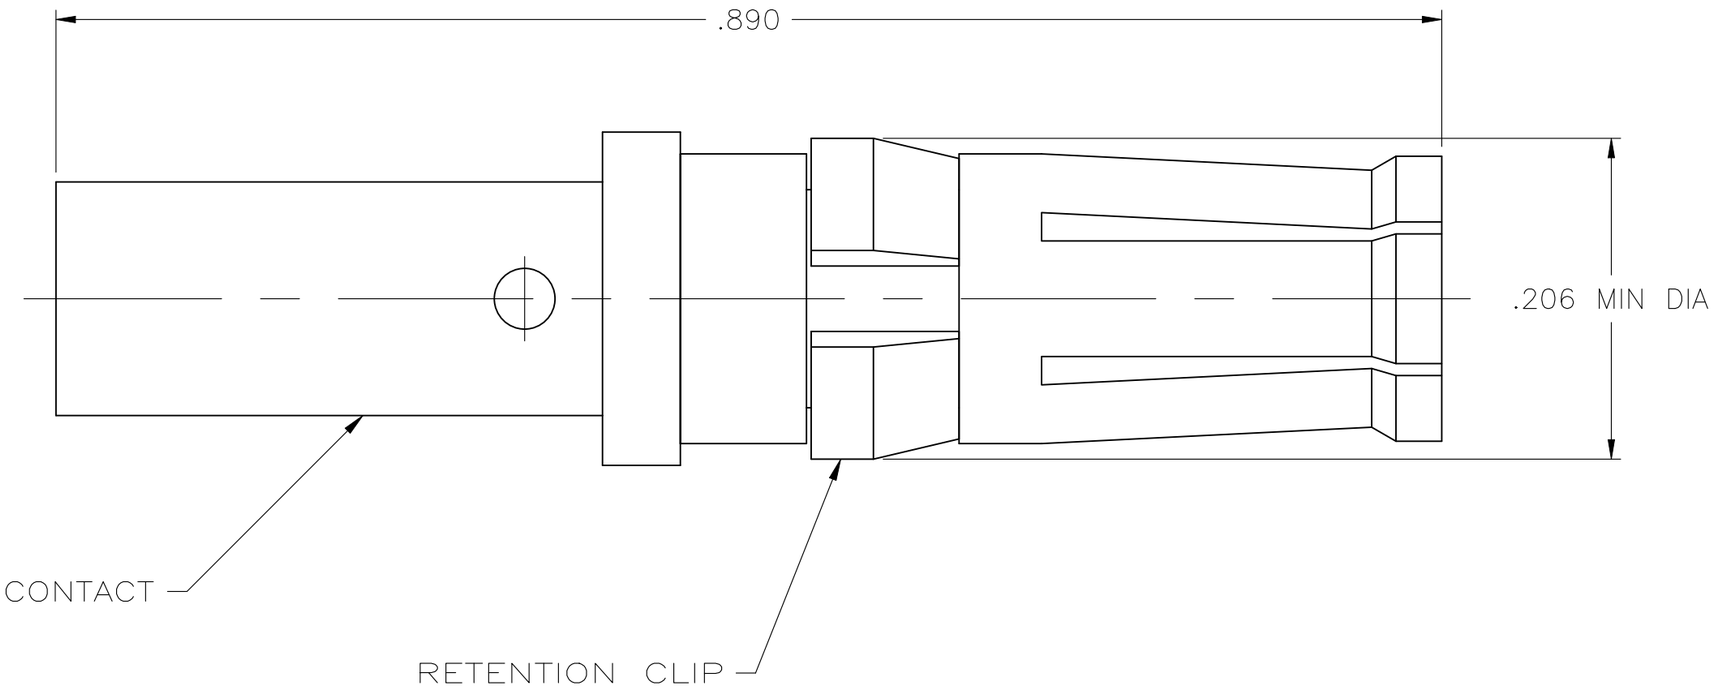

1. CONTACT: BERYLLIUM COPPER.
   RETENTION CLIP: PHOSPHOR BRONZE.
2. CONTACT: 0.76µm [.000030] MIN PRECIOUS METAL PLATE OVER
   1.27µm [.000050] MIN NICKEL.
   RETENTION CLIP: 2.54µm [.000100] MIN NICKEL.
3. WIRE BARREL WILL ACCEPT 12–14 AWG WIRE.

213910–1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL – 1

FINISH – 2

DWN D.HARDY 20 OCT 95
CHK W.G.LENKER 20 OCT 95
APVD M.McALONIS 23 OCT 95
PRODUCT SPEC 108–1317
APPLICATION SPEC 114–10014
WEIGHT –

TE Connectivity

NAME
CONTACT ASSEMBLY, SOCKET,
POWER VIII, METRIMATE
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-213910	–

CUSTOMER DRAWING

SCALE	SHEET	REV
10:1	1 OF 1	C