
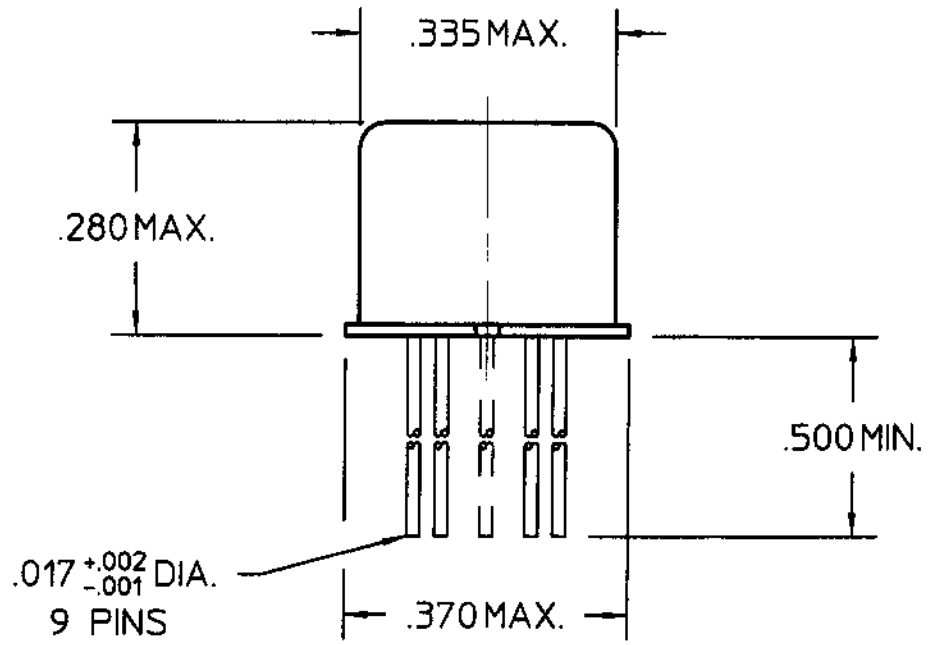


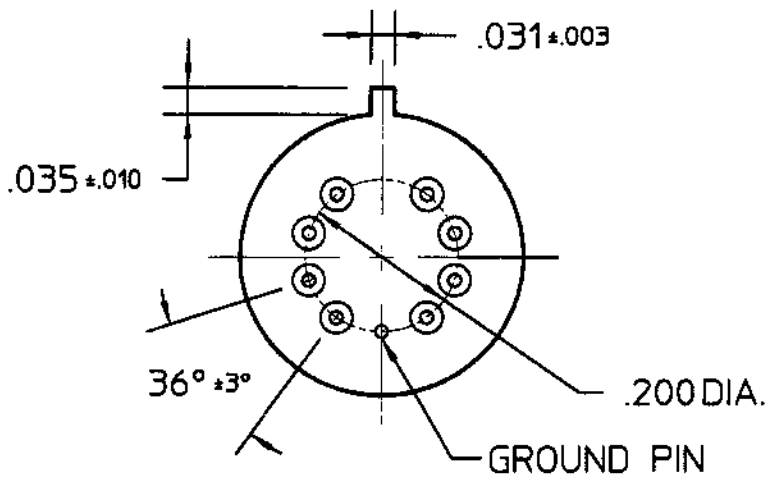

REV. 0
DCO 142821

COIL: @ 25°C


RESISTANCE	880 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	10.6 VDC
MUST RELEASE	6.0 VDC MAX, 0.91 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 3/15/01 CK. [signature] 3/15/01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/15-092L REV.

"JMAD" RELAY

JMACDG-18XL

F-718 REV. 3