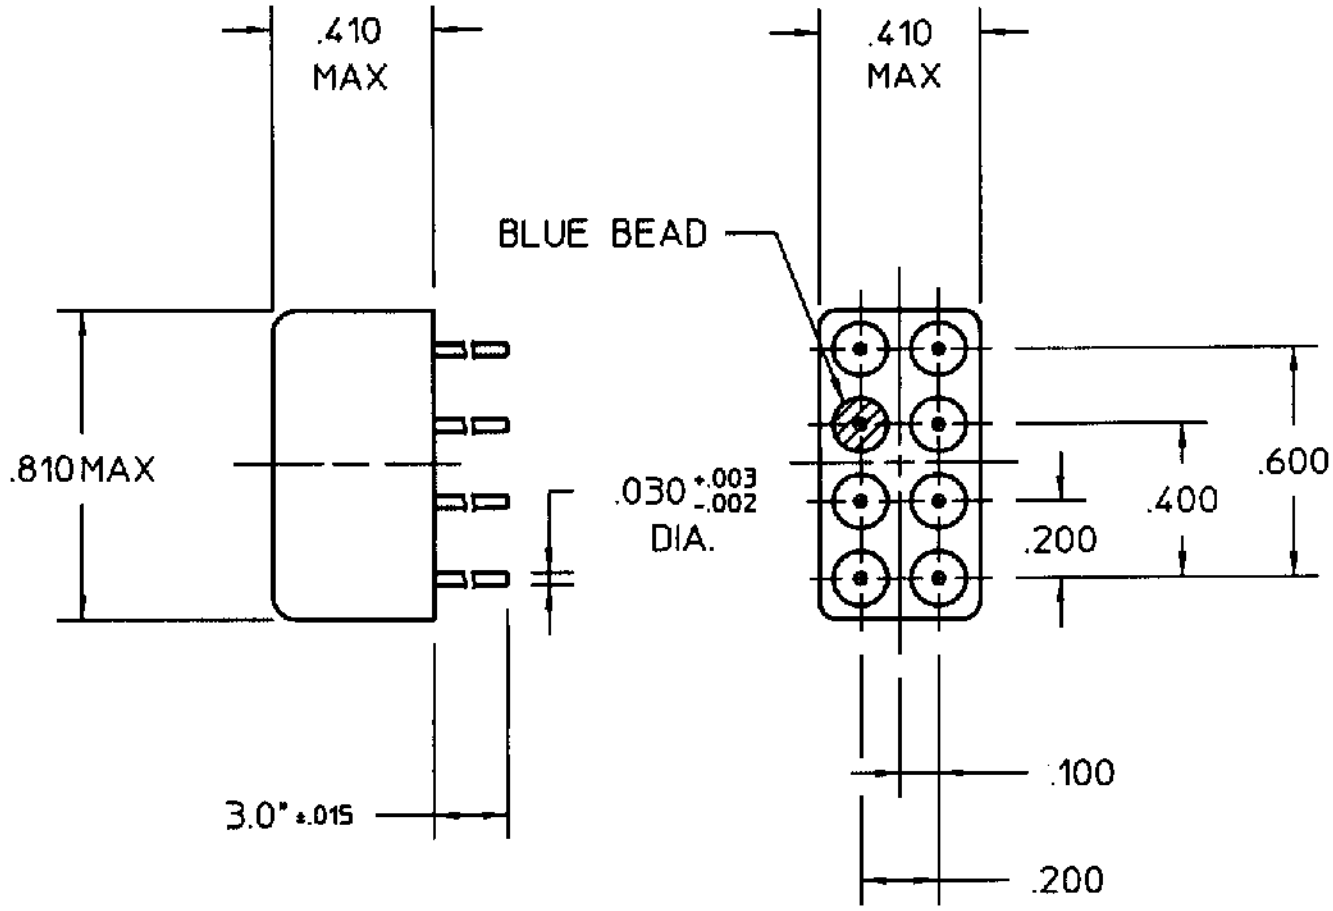


COIL: @ +25° C

RESISTANCE	1250 OHMS ± 10%
NOMINAL VOLTAGE	26.5-32.0 VDC
MUST OPERATE	14.0 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 4 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

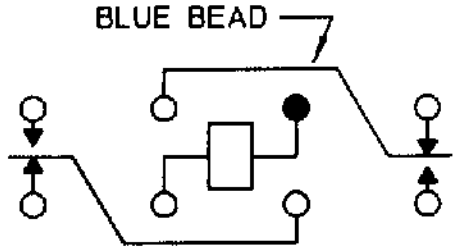

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/30/93 | CK. 12/1/93 RMB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.
CUST. NO. _____

TYPE "HFW" RELAY

HFW1301D00