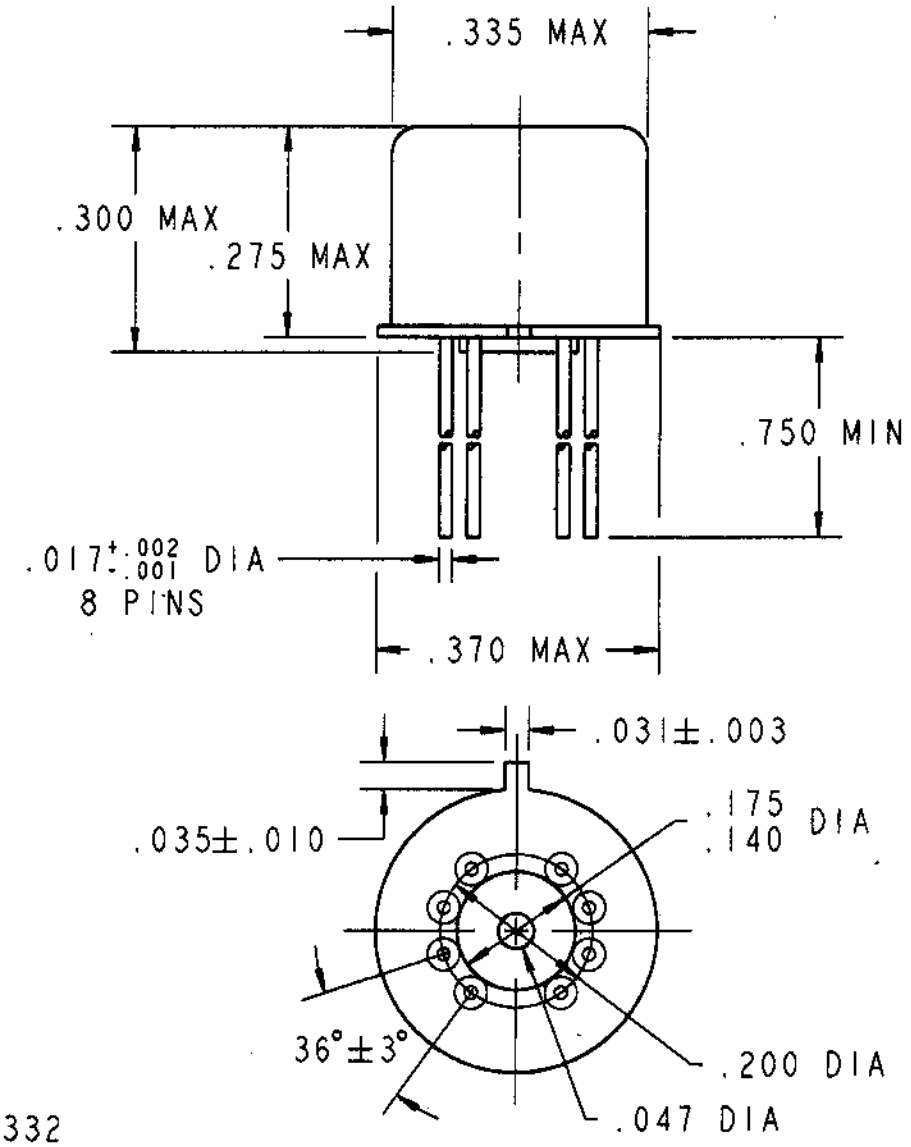


REV. 0
DCO 143332

COIL: @ 25°C

RESISTANCE 1560 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 17.0 VDC

MUST RELEASE

ENVIRONMENT:


VIBRATION 10 CPS TO 500 CPS @ 10 g's

SHOCK 30 g's 6±1 MS. DURATION

TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 6.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 11/30/01 CK. ERG 11/30/01

CII Technologies
advanced control electronic solutions

CUST. C.I.I.
CUST. NO. STANDARD REV.

"HMD" RELAY

HMD3-26B

F-718 REV. 3