
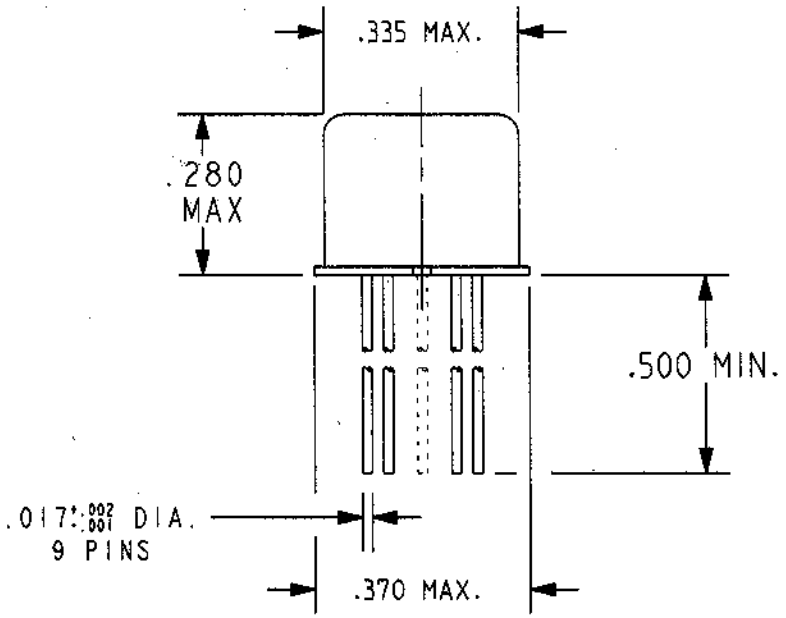


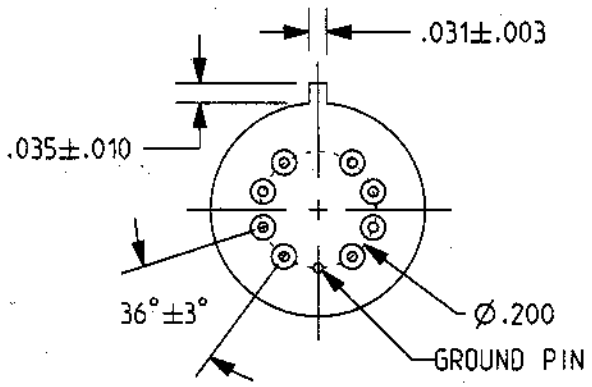

REV. 0
DCO 143461

COIL: @ 25°C

RESISTANCE	1560 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:
1. OPERATE TIME 2.0 MS MAX.
2. RELEASE TIME 4.0 MS MAX.
3. CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 02/21/02 CK. 2/21/02

CII Technologies
advanced control electronic solutions

CUST. CII QPL
CUST. NO. M39016/15-093L REV.

"JMAD" RELAY

JMACDG-26XL