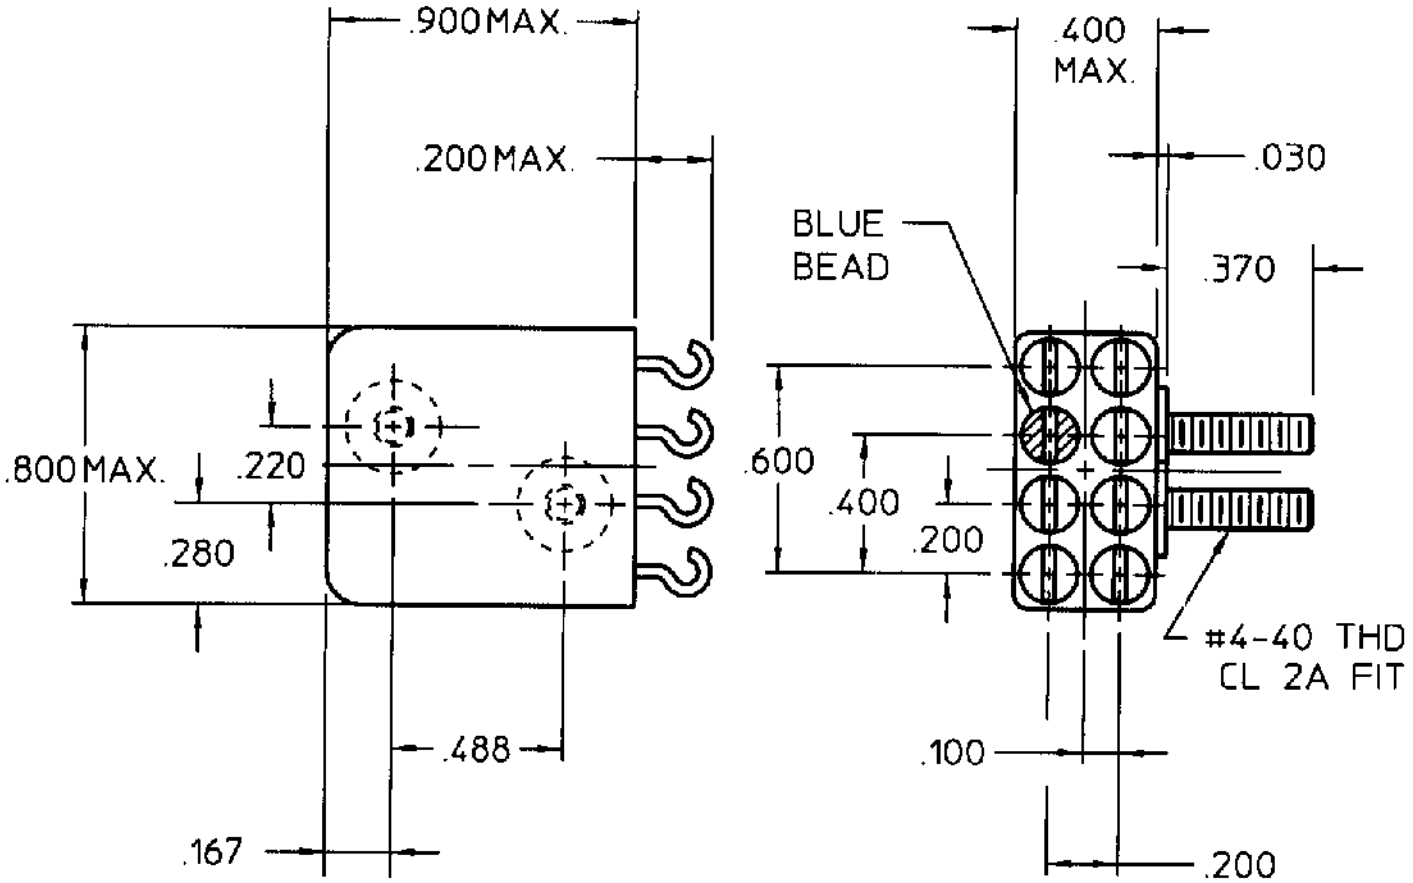


TOLERANCE ± .010

COIL: @ +25 ° C

RESISTANCE 550 OHMS ± 10%

NOMINAL VOLTAGE 24.0 VDC

MUST OPERATE 12.0 VDC

MUST RELEASE

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 30 g's

* SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: * EXCEPTIONS TO 200G 11 MS
ACCELERATION IS 50G INSTEAD OF 400G
3.5 MS MAX OPERATE INSTEAD OF 3.0 MS MAX.
3.0 MS MAX RELEASE INSTEAD OF 2.5 MS MAX.

CUSTOMER DATA SHEET

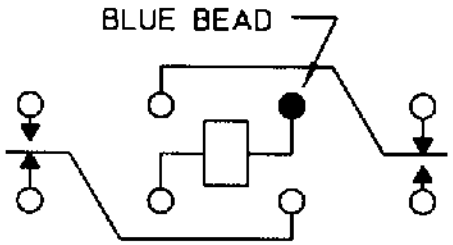

CONTACT RATING: LOW LEVEL TO 2A
30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/15/96 CK 4/15/96

COMMUNICATIONS INSTRUMENTS, INC.

CUST. P & B
CUST. NO. SCG-11DC-24

TYPE "FW" RELAY

FW1167S02