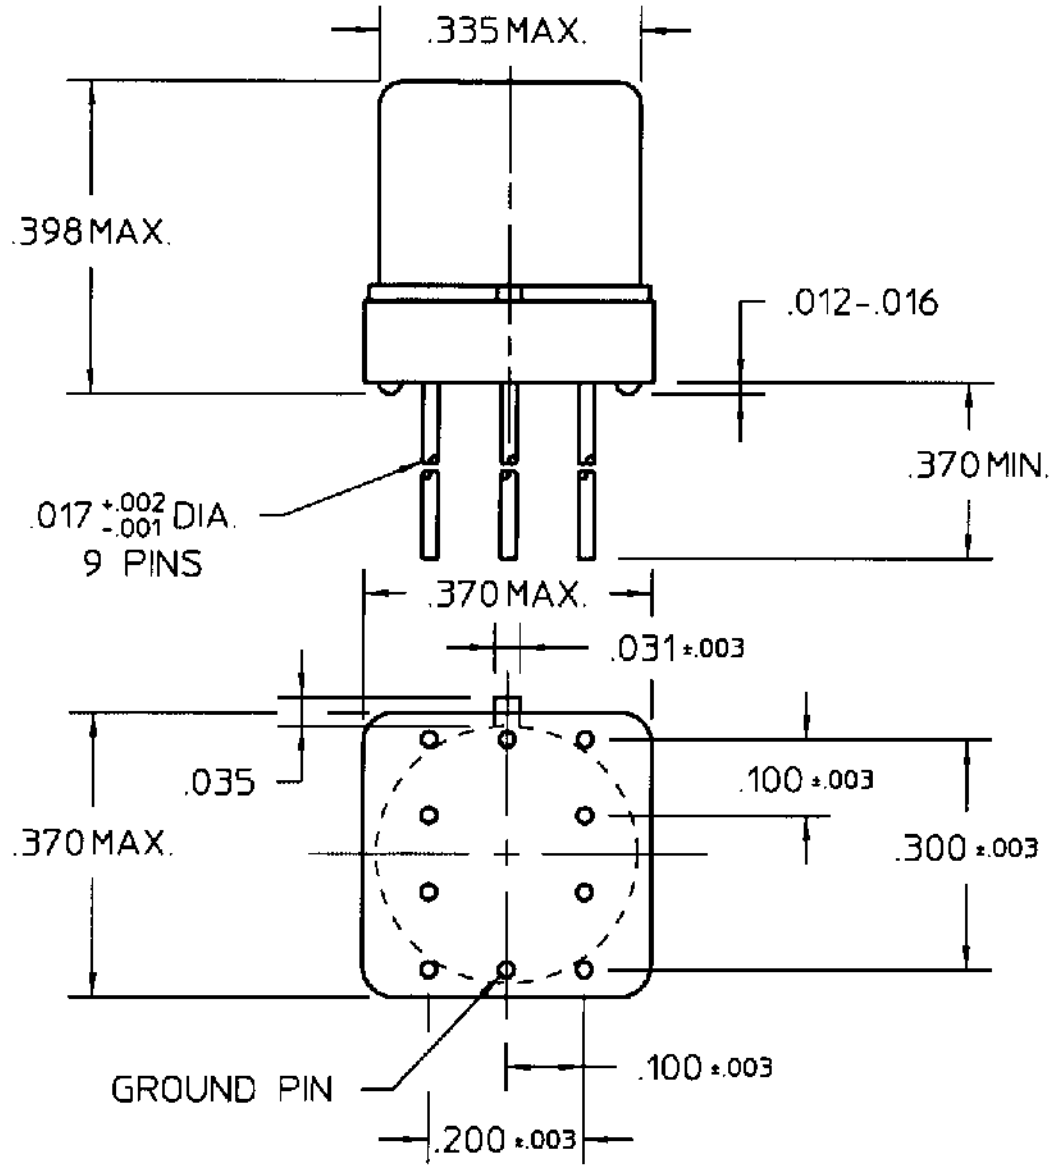


COIL: @ 25°C

RESISTANCE: 390 OHMS ± 10%

NOMINAL VOLTAGE: 12.0 VDC

MUST OPERATE: 7.0 VDC

MUST RELEASE: 4.0 VDC MAX, 0.63 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2 MS MAX
RELEASE TIME 4 MS MAX
CONTACT STABILIZATION 2.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/4/96 | CK. 4/4/96

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/15-115M

TYPE JMACD RELAY

JMACDG-12XMS