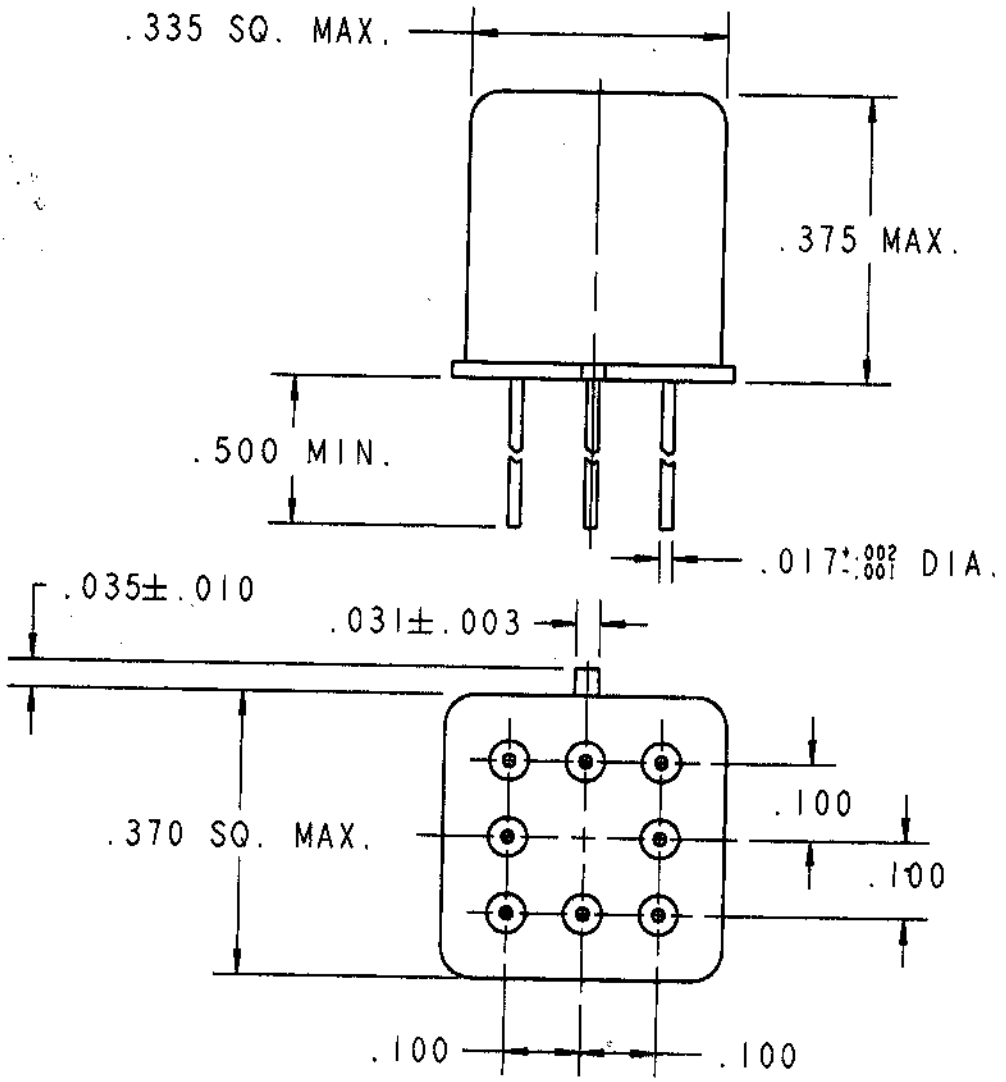


REV. 0
DCO 143374

COIL: @ 25°C

RESISTANCE	800 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	4.0 VDC MAX, 0.64 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 2.5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. B.D. 12/19/01 CK 12/19/01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/41-035M REV.

"JMGS" RELAY

JMGSC-12M

F-718 REV. 3