

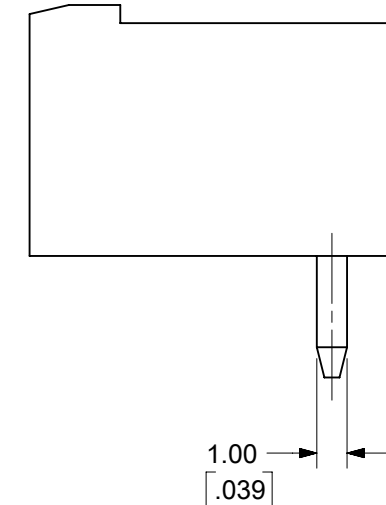
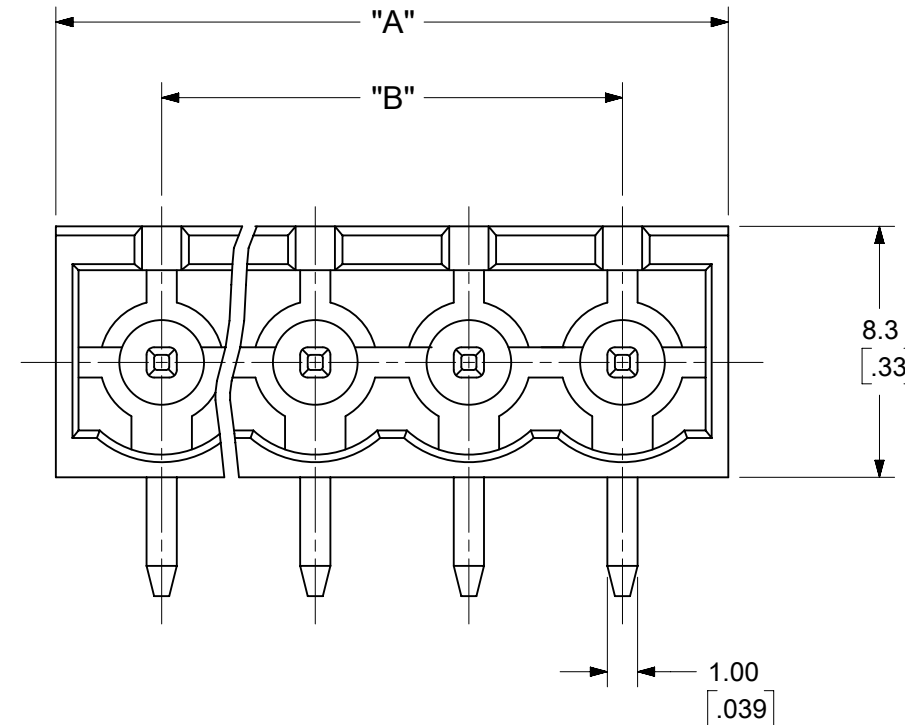


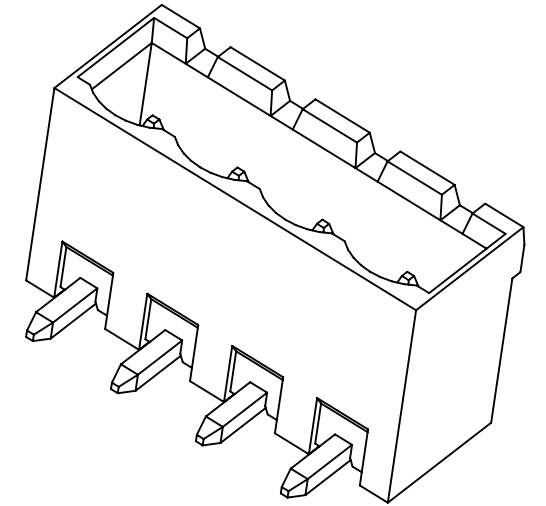

6. BREAKDOWN VOLTAGE : 4000V.

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	.24-1.18	±.016
>30-120	±0.50	1.18-4.76	±.020
>120	±0.80	>4.76	±.031

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
FA = 0 FE = 0 FB = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: MODIFIED SPECIFICATIONS					molex 5.0MM, EURO HEADER, RIGHT ANGLE					
	MM/INCH		4:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
DIVISIONAL SYMBOLS			MM	INCH	EC NO: 735568 DRWN: ABENJAMINLW 2023/01/05 CHK'D: DACHAMMER 2023/01/17 APPR: JFMURPHY 2023/01/27 INITIAL REVISION: DRWN: LROTHAUS 2006/01/09 APPR: JPAWLICK 2006/01/10					PRODUCT CUSTOMER DRAWING					
	4 PLACES	±	---	±											---
	3 PLACES	±	---	±						SEE CHART					
	2 PLACES	±	SEE CHART	±						SEE CHART					
	1 PLACE	±	SEE CHART	±						---					
	0 PLACES	±	---	±						---					
	ANGULAR TOL		±							---					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						B-SIZE		39522		SEE SHEET-2		GENERAL MARKET		1 OF 2	
				molex 5.0MM, EURO HEADER, RIGHT ANGLE											
				PRODUCT CUSTOMER DRAWING											
				DOCUMENT NUMBER				DOC TYPE		DOC PART		REVISION			
				SD-39522-002				PSD		001		A3			

