
© – TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	GTP	11JUN2023	ED	WH

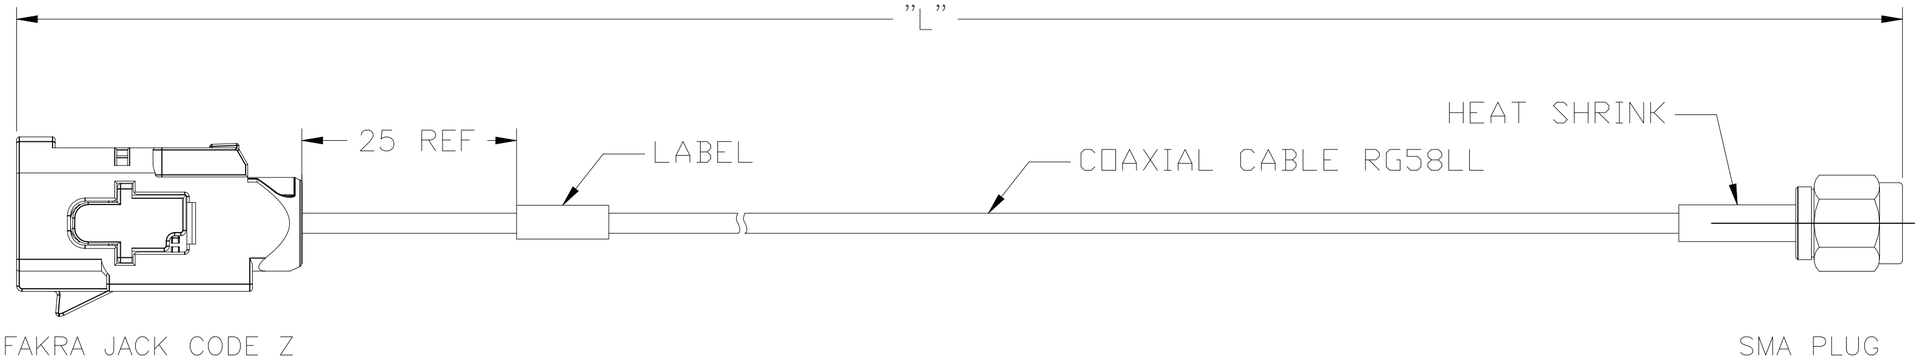

TE P/N	LENGTH L(mm)
2081345-1	300^{+10}_{0}
2081345-2	600^{+10}_{0}
2081345-3	1000^{+15}_{0}
2081345-4	2000^{+20}_{0}
2081345-5	3000^{+30}_{0}
2081345-6	5000^{+50}_{0}

NOTES:

1. ALL RF CONNECTORS MUST BE ASSEMBLED PER MANUFACTURER'S APPLICATION SPECIFICATIONS WITH FOLLOWING [SC]:
   1.1: SOCKET CONTACTS CRIMP HEIGHT
   1.2: FERRULES' CRIMP HEIGHT
   1.3: CONNECTORS TO COAX CABLE RETENTION FORCE
2. 100% IN-PROCESS ELECTRICAL TEST:
   2.1: DC CONTINUITY, FOR CENTER AND OUTER CONDUCTORS, POINT TO POINT
   2.2: SHORT CIRCUITS;
3. TEMPERATURE RANGE: -40°C TO 85°C
4. MAX FREQUENCY IS 3GHz
5. LABEL CONTENT:

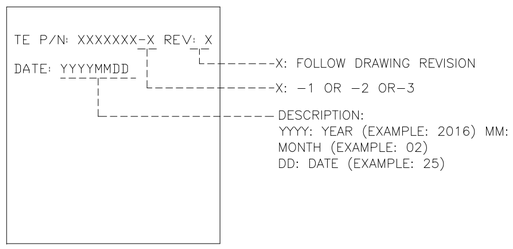

			1 PCS	1 PCS	1 PCS	1 PCS	1 PCS	1 PCS	LABEL	4
			5m	3m	2m	1m	0.6m	0.3m	COAXIAL CABLE RG58LL	3
			1 PCS	1 PCS	1 PCS	1 PCS	1 PCS	1 PCS	SMA PLUG,RG58 CABLE	2
			1 PCS	1 PCS	1 PCS	1 PCS	1 PCS	1 PCS	FAKRA JACK CODE Z WATER BLUE,RG58 CABLE	1
			2081345-6	2081345-5	2081345-4	2081345-3	2081345-2	2081345-1	DESCRIPTION	ITEM
QUANTITY										

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	ED	24MAR2023
CHK	RZ	24MAR2023
APVD	WH	24MAR2023
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

TE Connectivity

NAME
CABLE ASSEMBLY, RG58LL CABLE,
FAKRA FEMALE CODE Z TO SMA MALE.
LENGTH IS L

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2081345	–

CUSTOMER DRAWING | SCALE – | SHEET 1 OF 1 | REV A

2081345