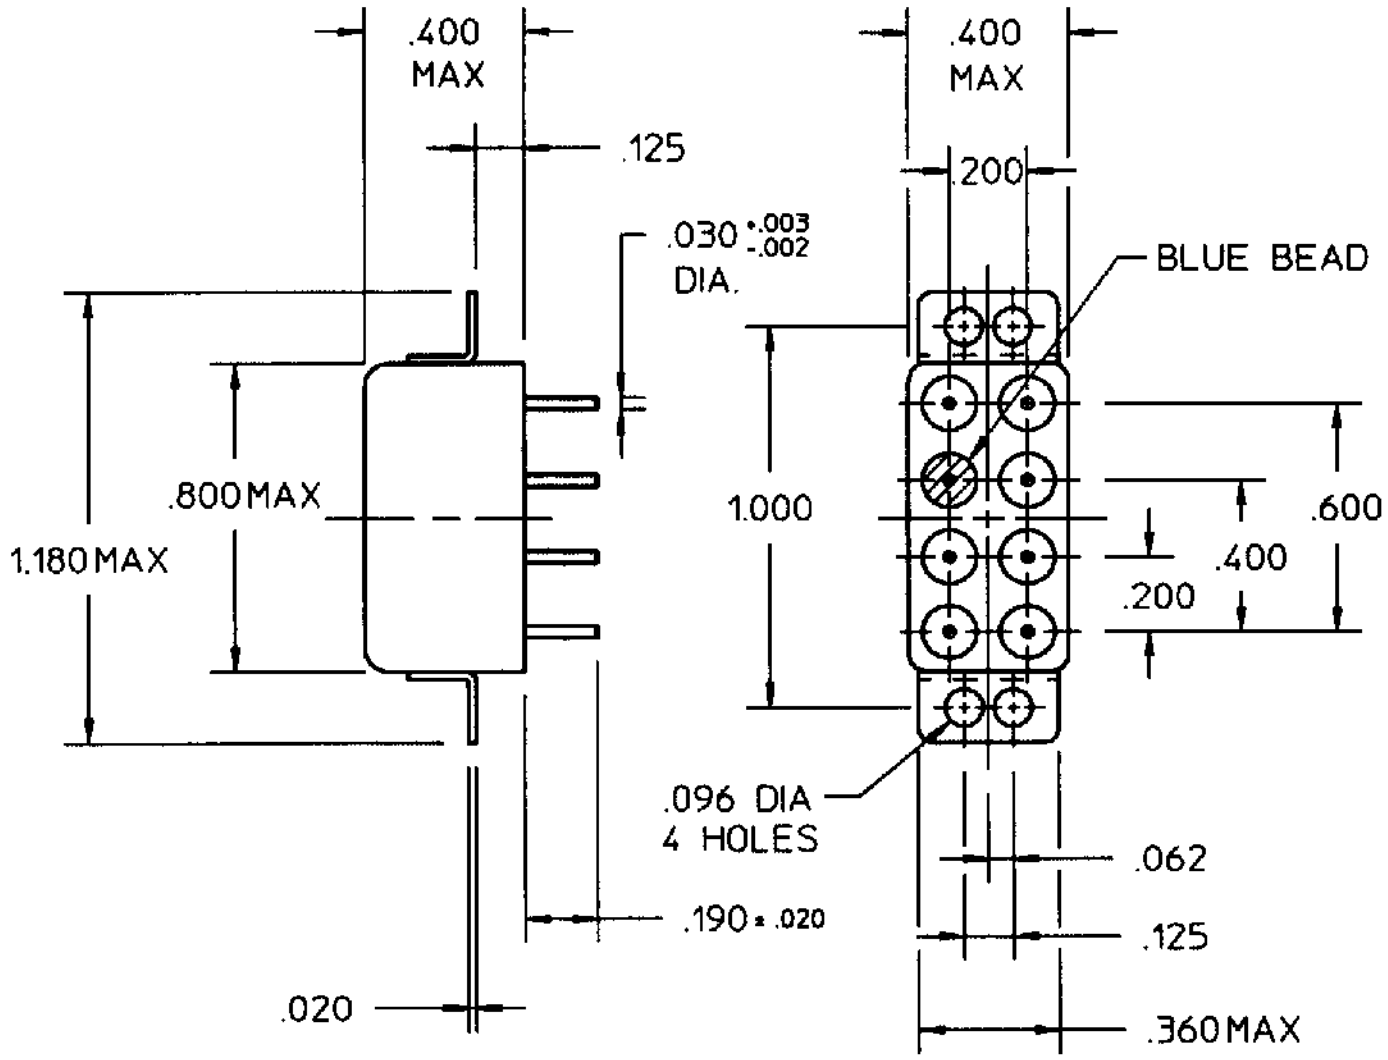


COIL:

RESISTANCE: 1620 OHMS ± 10%

NOMINAL VOLTAGE: 22.5-44.0 VDC

MUST OPERATE: 14.3 VDC

MUST RELEASE: 8.6 VDC MAX 1.4 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX
RELEASE TIME 5 MS MAX
CONTACT BOUNCE 2 MS MAX

CUST. GENICOM
CUST. NO. 3SAV5014L2

TYPE "HMS" RELAY

CUSTOMER DATA SHEET

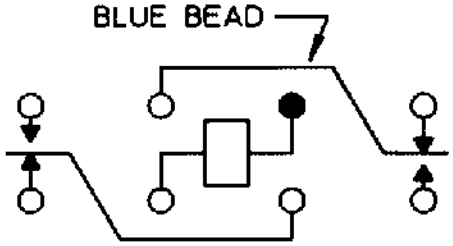

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 6/4/92 CK. 6/9/92

COMMUNICATIONS INSTRUMENTS, INC.

HMS1206S01