

C



I

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|

| DIM | DIMENSIONS |      |     |     |
|-----|------------|------|-----|-----|
|     | INCHES     |      | MM  |     |
|     | MIN        | MXA  | MIN | MXA |
|     | .500       | .519 |     |     |
|     | .307       | .3   |     |     |
|     | .029       |      |     |     |
|     | .077       |      |     |     |
|     | 1.487      |      |     |     |
|     | 1.250      |      |     |     |
|     | .931       |      |     |     |
|     | .996       |      |     |     |
|     | .586       |      |     |     |
|     | .492       |      |     |     |
|     | .161       |      |     |     |
|     | .161       |      |     |     |
|     | .181       |      |     |     |
|     | .165       |      |     |     |
|     | 1.184      |      |     |     |

Figure.1 - Typical Forward Characteristics

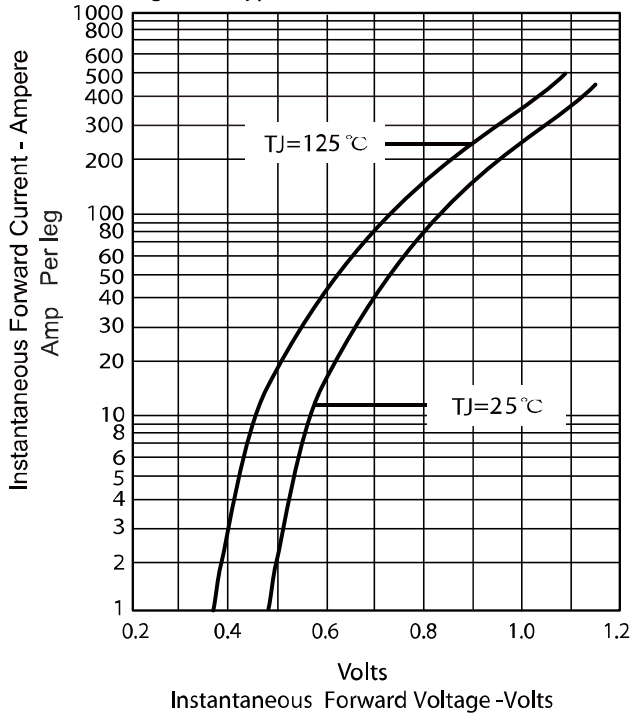


Figure .2- Forward Derating Curve

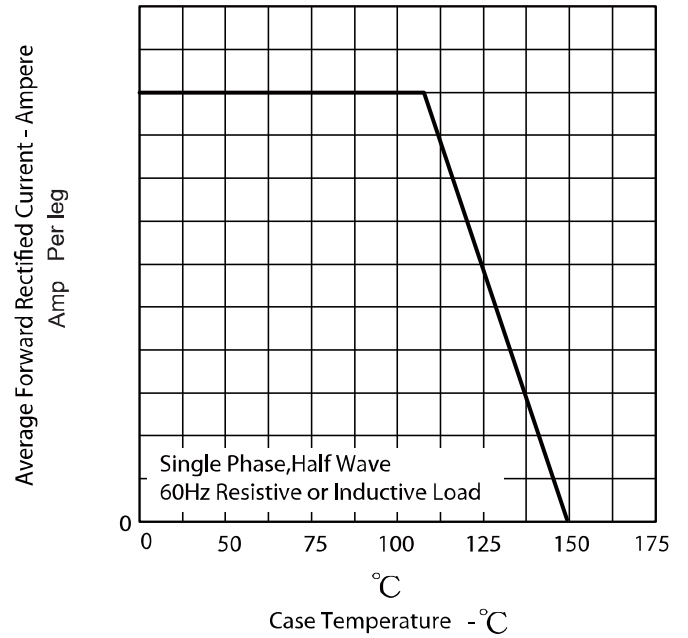


Figure.3 - Peak Forward Surge Current


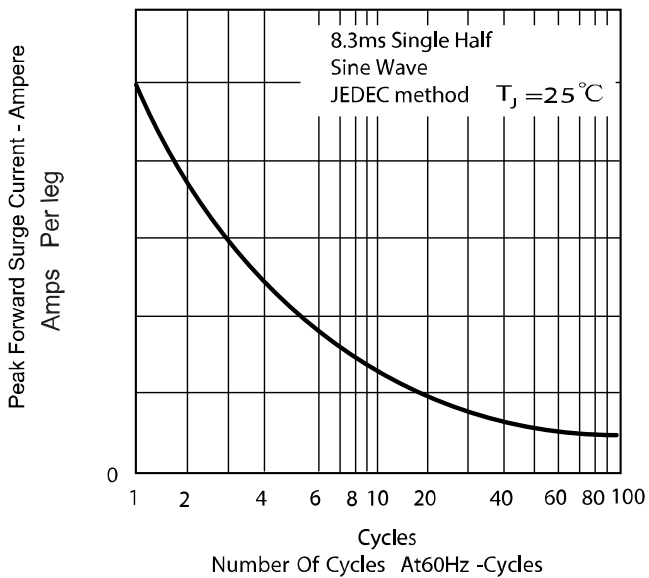


Figure.4 - Typical Reverse Characteristics

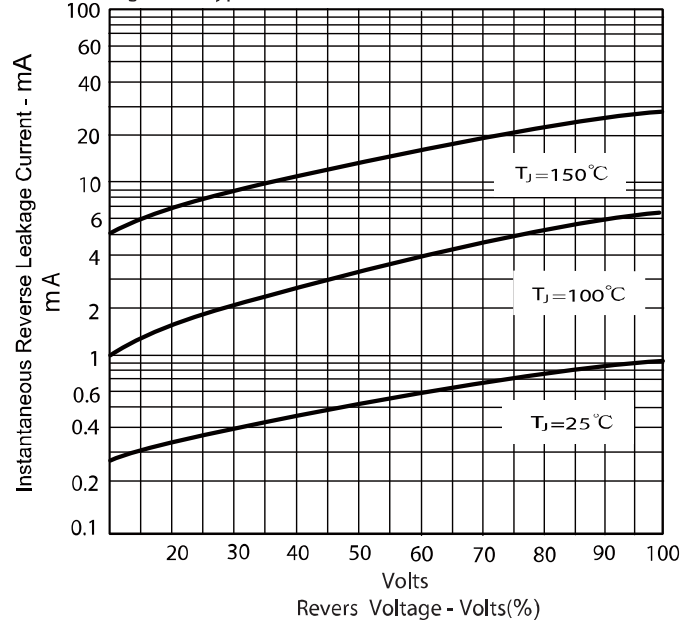

**Revision History**

| Date       | Revision | Notes                       |
|------------|----------|-----------------------------|
| 8/10/2014  | 1.0      | Initial release             |
| 01/03/2020 | 1.1      | Applied company name change |
|            |          |                             |