



Terminals & Splices > Ring Terminals



Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 509 – 3260 CMA

Stud Size: 1/2, M12

Features

Product Type Features

Terminal Features	Sheared
Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	1/2, M12
Sealable	No
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Number of Holes	1
-----------------	---

Body Features

Product Weight	1.283 g
----------------	---------

Contact Features

Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------



Dimensions

Wire Size	509 – 3260 CMA
Stud Diameter	13.08 mm[.515 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	27.18 mm[1.07 in]
Barrel Inside Diameter	1.55 mm[.061 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	0 – 170 °C[0 – 338 °F]

Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin

Industry Standards

Government Qualified Terminal	No
-------------------------------	----

Packaging Features

Packaging Method	Loose Piece
------------------	-------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these




limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 169400 CERTI-LOK FRAME W/O DIES	 TE Part # 58546-1 PC 22-10 SOLISSPICE SPL I SHT	 TE Part # 49935 DAHT SOLIS 22-10 ASSY	 TE Part # 47812 DIES SOLIS 22-16 DIE SET
 TE Part # 525693 DAHT SOLIS 22-10 ASSY	 TE Part # 58545-3 SDE DIE ASSY. 22-10 SOLISTRAND	 TE Part # 58545-1 SOLISTRAND 10-22 DIE ASSY	

Customers Also Bought

 TE Part #ZPF000000000018696 FDDBA 50-8-98 PN-K-A246	 TE Part #ZPF000000000018311 FDDBA 50-18-32 PN-K-A5610	 TE Part #ES8554-000 OKE-12-0.5-IEEE	 TE Part #481539-000 BPTM-120/50-A/U(B50)
 TE Part #EP6205-000 BCAC-G-IC2-5D/6(B6)	 TE Part #E64189-000 MP-254097-10-8A	 TE Part #ES6250-000 R2M-2502131-H009	 TE Part #ET0731-000 EXRM-2101-AK-COAX-9M-SET

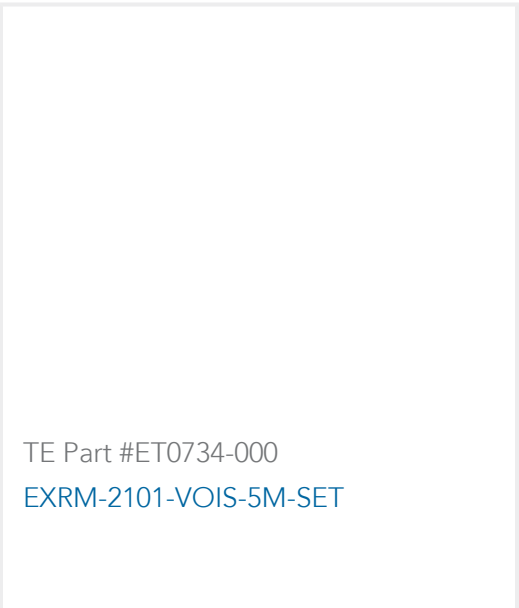

Documents

Product Drawings

SOLIS R 22-16COMM 22-18MIL 1/2

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_329966_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_329966_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_329966_F.3d_stp.zip

English

Customer View Model

ENG_CVM_329966_C.3d_igs.zip

English

Customer View Model

ENG_CVM_329966_C.3d_stp.zip

English

Customer View Model

ENG_CVM_329966_C.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English

329966

Closed Ring Tongue Terminal, 22 – 16 AWG, 1/2 / M12 Stud, 13.08 mm [.515 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Uninsulated



UL Report

English