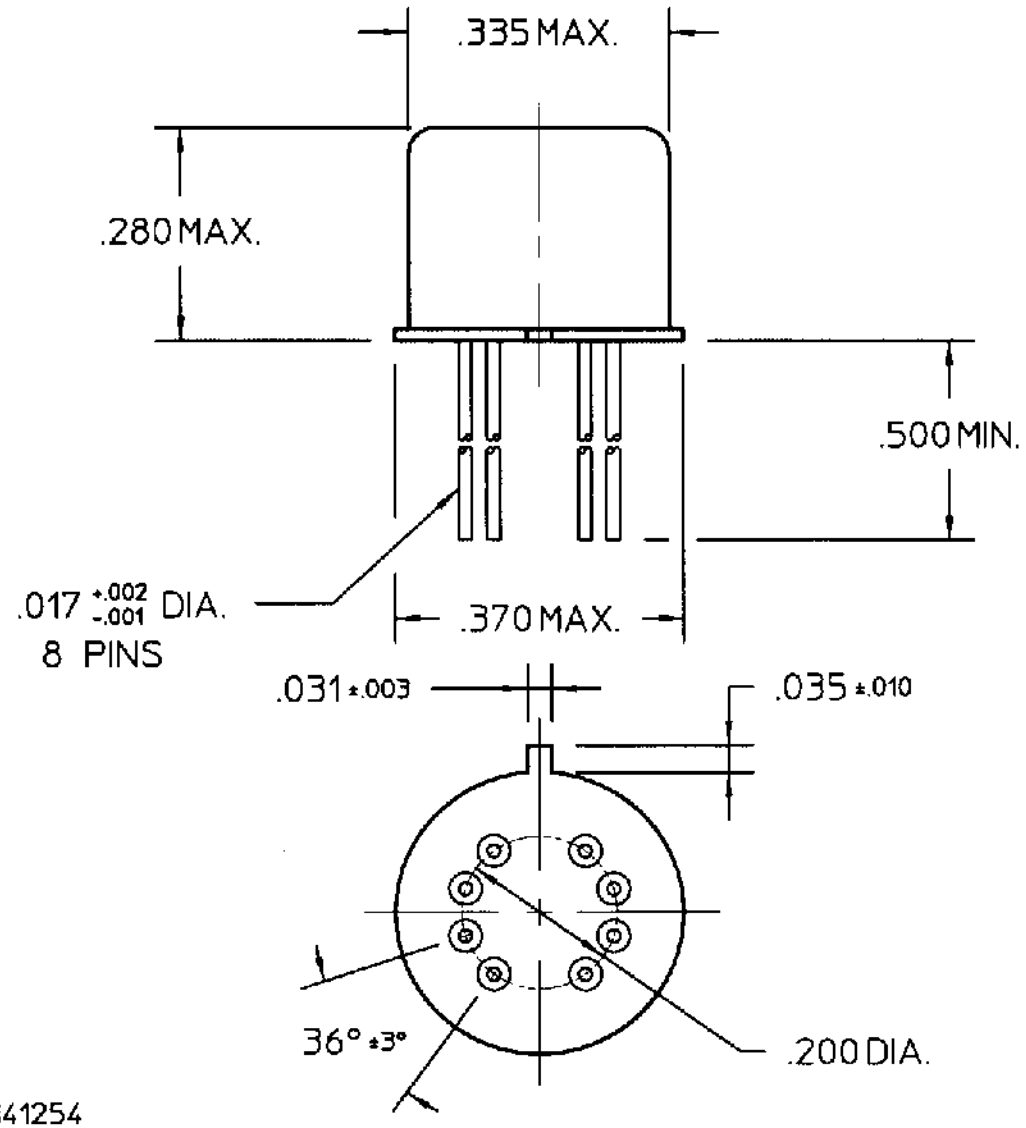


REV. 0

DCO 141254

COIL: @ 25°C

RESISTANCE 1560 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 15.2 VDC

MUST RELEASE 9.5 VDC MAX, 1.8 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2 MS MAX

RELEASE TIME 4 MS MAX

CONTACT STABILIZATION 2.0 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 8/11/99 CK. 8/4/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL

CUST. NO. M39016/20-054M REV.

"JMADD" RELAY

JMACDD-26XM

F-718 REV. 2